NASA CR-174828 Allison EDR 11984

NNSN

Turbine Vane External Heat Transfer

Volume II.

Numerical Solutions of the Navier-Stokes Equations for Two- and Three-Dimensional Turbine Cascades with Heat Transfer

> By: R. J. Yang B. C. Weinberg S. J. Shamroth H. McDonald

Scientific Research Associates, Inc. Glastonbury, Connecticut

performed under subcontract for

Allison Gas Turbine Division General Motors Corporation Indianapolis, Indiana 46206-0420

Final Report

prepared for

National Aeronautics and Space Administration NASA-Lewis Research Center Cleveland, Ohio 44135 Contract No. NAS3-23695

TABLE OF CONTENTS

<u>Title</u>

Section

Page

ISummaryIIIIIntroductionIIIIIIAnalysisIIIAnalysisIIIAnalysisIIIAnalysisIIIOnclusionsIIIVConclusionsIIIIVConclusionsIIIIAppendix A--Solution ProcedureIIIIAppendix B--User's ManualIIIIIAppendix C--List of Acronyms, Abbreviations, and SymbolsI49

LIST OF ILLUSTRATIONS

<u>Title</u>

i.

<u>Figure</u>

Page

1	C-type grid for Turner cascade geometry
2	Constructive O-type coordinate system 9
3	Four basic loops of the constructive coordinate system 10
4	O-type grid coordinate system for Turner cascade
5	O-type grid coordinate system for C3X cascade
6	Three-dimensional C3X cascade with endwall
7	C-type coordinate system for Turner cascade
8	Pressure coefficients distribution of the subsonic laminar
	cascade
9	Pressure coefficients distribution of the subsonic
	turbulent cascade
10	Turner cascade pressure distribution of the transonic case 35
11	Comparison of measured and calculated pressure distribution
	of the C3X cascade
12	Surface temperature distribution for case 144
13	Comparison of measured and calculated pressure distributions
	of the C3X cascade for cases 144, 148, and 158
14	Vector plot for C3X cascade, case 144
15	Comparison of measured and calculated heat transfer
	coefficient distributions of the C3X cascade 41
16	The effect of film cooling on heat transfer coefficient
	distributions
17	The effect of film cooling on pressure coefficient
	distributions
18	Temperature contours
19	Pressure contours
20	Mach number contours
21	Three-dimensional rectilinear pressure coefficient
	distribution of the C3X cascade
22	Static pressure contour at the endwall
23	Static pressure contour at the 3.5% spanwise plane 50

LIST OF ILLUSTRATIONS (CONT)

<u>Figure</u>

<u>Title</u>

•	
24	Static pressure contour at the midspan plane
25	Leading edge vector plot at the 0.135% spanwise plane 52
26	Leading edge vector plot at the 2.95% spanwise plane 53
27	Leading edge vector plot at the midspan plane
28	The overall program flow for program COORD
29	The overall program flow for program DAL
30	The program flow chart for subroutine READA
31	The program flow chart for subroutine EXEC
32	Cascade geometry

.

LIST OF TABLES

<u>Title</u>

<u>Table</u>

and the second s

Page

I	COORD namelist input description
II	MINT namelist input description
III	List of major FORTRAN variables in MINT
ΙV	Sample input for COORD
V	Sample inputs for MINT code
VI	Sample outputs for COORD program
VII	Sample outputs for MINT code

I. SUMMARY

The multidimensional, ensemble-averaged, compressible, time-dependent Navier-Stokes equations have been used to study the turbulent flow field in two- and three-dimensional turbine cascades. The viscous regions of the flow were resolved and no-slip boundary conditions were used on solid surfaces. The calculations were performed in a constructive O-type grid, which allows representation of the blade rounded trailing edge. Converged solutions were obtained in relatively few time steps (~80-150) and comparisons of both surface pressure and heat transfer showed good agreement with the data. The three-dimensional turbine cascade calculation showed many of the expected flow field features.

II. INTRODUCTION

An important factor in the overall design of advanced gas turbine engines is the flow in and about the turbine blade passages. These components are a source of aerodynamic loads and losses that can control the overall machine efficiency and that may be subject to extreme heat transfer problems. Inaccurate estimates of both loss coefficients and heat transfer rates may lead to erroneous predictions of engine performance and to poor component life or even catastrophic failure of component parts, respectively. Therefore, an accurate estimate of both the flow field and the accompanying heat transfer properties in the turbine passages would be a valuable tool for the gas turbine design engineer.

In recent years, reliable and efficient computational procedures for predicting the flow field and the accompanying heat transfer characteristics within the turbine blade passages have been developed. Several methods for analyzing the two-dimensional (2-D) passages in the turbine blades are available. Many analyses are based on solving inviscid flow equations (Ref 1 and 2) and, in many cases, these analyses are capable of predicting the blade pressure distribution well.

Due to a lack of any viscous phenomena, however, these analyses cannot predict heat transfer or loss information. To predict heat transfer and/or viscous loss data, a set of boundary layer equations can be solved in conjunction with the inviscid analysis. A review of boundary layer techniques for turbomachinery applications has been presented by McDonald (Ref 3). When the inviscid flow boundary layer analysis technique is used, the calculations can be made in an interactive or noninteractive mode. In the noninteractive mode, an inviscid flow is calculated and the boundary layer is then calculated subject to the inviscid flow pressure distribution. This approach is viable if viscous displacement effects are small. When viscous displacement effects are significant, then the calculation should be performed in an interactive mode (Ref 4), which recognizes the mutual dependence of the inviscid and viscous solutions.

An alternative method of determining the 2-D viscous flow in the turbine passages is to solve an ensemble-averaged set of Navier-Stokes (N-S) equations in conjunction with a turbulence model to predict the entire passage flow field.

The N-S procedure has distinct advantages over other methods. The N-S analysis precludes any need to divide the flow into inviscid and viscous subregions. Although in some cases such a division may not be troublesome, in other cases no clear cut division is obvious. The N-S analysis solves the entire flow field with a single set of equations and, therefore, the influence of the viscous phenomena, taken in the boundary layer and in the wake, on the pressure distribution is inherent in the solution. Similarly, streamwise flow separation is not difficult to solve with the N-S analysis. This fact is particularly important in cases involving distributed surface injection or blades subjected to high loading where local regions of separation, which may be regions of high heat transfer, may occur. Although boundary layer analyses can proceed through separation if approximations are made (Ref 5), such analyses contain serious approximations in and near the separated region if these regions are not small and thin. The results in this instance must be viewed with caution. The N-S analysis contains no approximations, other than those involved in turbulence modeling in this region.

When considering three-dimensional (3-D) cascades, which include endwall and corner effects, the flow phenomena become even more complicated. In addition to possible 2-D flow-type situations in the vicinity of the midplane, complex 3-D, viscous flow patterns appear in the endwall regions. These flow patterns include the leading edge horseshoe vortex at the strut endwall intersection, the complex vortex patterns passing through the passage (Ref 6), and the corner regions. These complex 3-D, viscous flow regions argue strongly for a full N-S approach.

In simple quasi-two-dimensional situations, the viscous and turbulent near wall region velocity profile can sometimes be described by 3-D extensions of the law of the wall for turbulent boundary layers, although these 3-D extensions are much less universal than their 2-D counterparts. In the complex 3-D flows existing in the turbine passage, the near wall flow is not well described by such a wall law. Consequently, it becomes necessary to define the near wall region with mesh points when heat transfer and loss mechanisms are of interest. The added mesh point density and the presence of these additional length scales in the solution place very stringent requirements on the numerical methodology. Successful calculations that applied a N-S procedure to several 2-D cascade problems using no-slip boundary conditions (as opposed to a wall law) have been reported in Ref 7 through 12. The procedure used in these efforts was the consistently split linearized block implicit (LBI) scheme of Briley and McDonald (Ref 13). The numerical scheme is embodied in a general computer code termed MINT (multidimensional, implicit, nonlinear, time-dependent). The particular form of the code being used for the cascade application solves the general tensor form of the N-S equations and, therefore, can be used with a general coordinate system. The dependent variables in the analysis are the Cartesian velocity components, the density, and, if turbulent flow with a turbulence energy model is considered, the turbulence kinetic energy, k, and if a twoequation model is used, the dissipation rate, ϵ . The choice of Cartesian velocity components as dependent variables is based on experience obtained with a variety of choices including the contravariant velocity components, the physical velocity components in the coordinate directions, and the Cartesian velocity components as discussed in Ref 14.

To date, the cascade analysis has been used to predict the 2-D flow in several cascade configurations using a C-type coordinate system. In Ref 10, flow fields were obtained for cascades formed by unstaggered NACA 0012 airfoils in subsonic laminar and turbulent flow. The results were obtained very economically in relatively few time steps (~60 for laminar flow) and showed the expected cascade flow field features. In Ref 11, the analysis was extended to the transonic regime and results were obtained for transonic flow through a Jose Sanz diffusion cascade. Once again, the results were obtained very economically in a relatively few number of time steps (~150) and showed the qualitative features expected in a transonic cascade flow field.

In particular, the analysis showed its capability to predict transonic flows with sharp shock definition and, on a grid point-to-point basis, to cost little more than an efficient solution of the Euler equations. One case study corresponded to conditions for which an inviscid, i.e. Euler equation, solution existed. The results of the N-S analysis showed good agreement with the inviscid result. The differences observed were consistent with the inclusion of viscous boundary layer development in the N-S analysis. In comparing the viscous and inviscid results, with this particular N-S solution precedure no Kutta condition or exit flow angle specification is required, the exit flow follows

the specifications of the inlet total pressure and the exit static pressure. Inviscid flow calculations with other boundary conditions have the possibility of being different by virtue of these boundary conditions. Ref 7 and 9 contain calculations for both subsonic and transonic compressor configurations and a transonic turbine configuration. The predicted blade pressure distributions were comparable with the measurements of Stephens and Hobbs (Ref 15) and Hobbs, Wagner, Dennenhoffer, and Dring (Ref 16). The subsonic cascade flow (Ref 16) had two boundary layer profile measurements at the 97% chord pressure and suction surface stations. Although only a tentative assessment of the procedure can be made on the basis of these two profiles in the immediate vicinity of the blade trailing edge, the comparison showed the predicted profiles to be in agreement with the measured data even though further turbulence modeling work with particular emphasis on transition was indicated.

This effort applies this same N-S procedure to 2-D and 3-D transonic turbine cascade flows. Such an application requires several new features, including a new coordinate capability, extension to three dimensions, and the inclusion of an energy equation in the governing system. In general, the geometrical configuration of the turbine blades impacts both the grid construction procedure and the implementation of the numerical algorithm. Because the turbine blades of interest, e.g. Turner and C3X turbine cascades, are characterized by very blunt leading edges, rounded trailing edges, and high stacking angles, a robust grid construction procedure that can accommodate the severe body shape while resolving regions of large flow gradients is required. A constructive O-type grid generation technique that meets these requirements has been developed and used in this effort. An energy equation was activated in the code, 2-D calculations employing the N-S procedure were performed for the Turner and C3X turbine cascades, and the predicted pressure coefficients and heat transfer rates were compared with experimental data wherever available. A calculation with a film-cooling option applied over the C3X turbine blade surface was also demonstrated. In addition, the corresponding 3-D rectilinear C3X turbine cascade in which blade-endwall effects are present is considered. Throughout the effort, no-slip boundary conditions with the viscous near wall definition of the flow were used as appropriate with the total pressure inflow and exit static pressure at outflow used to obtain the mass flow through the channel and to determine the flow turning. These boundary conditions were found the most plausible yet the least restrictive in terms of the predicted flow.

III. ANALYSIS

This analysis is based on a solution of the ensemble-averaged Navier-Stokes (N-S) equations using the linearized block implicit (LBI) method of Briley and McDonald (Ref 13). The equations are solved in a constructive coordinate system (Ref 7) with density and the Cartesian velocity components as dependent variables. The application of the LBI method to the two-dimensional (2-D) cascade flow field problem together with the C-type grid coordinate system has been discussed in some detail in Ref 7 through 12. This effort deals with the application of the LBI method to the 2-D or 3-D transonic turbine cascade flow field problem using an O-type grid coordinate system and includes the effects of heat transfer.

COORDINATE SYSTEM

An important component of the turbine cascade analysis is the cascade coordinate system. Any coordinate system used in the analysis should satisfy conditions of generality, smoothness, resolvability, and allow easy application of boundary conditions. A coordinate system must be sufficiently general to allow application to a wide class of problems of interest if it is to be practical. The metric data associated with the coordinate system must be sufficiently smooth so that the variation from grid point to grid point does not lead to a numerical solution dominated by metric coefficient truncation error. This requirement differs from the requirement of the existence of a specified number of transformation derivatives. The coordinate system must resolve flow regions where rapid flow field changes occur. Finally, coordinates should allow accurate implementation of boundary conditions; for the cascade this requirement is equivalent to the requirement that the metric coefficients be continuous across the periodic lines where periodic boundary conditions are to be applied.

To date, several types of coordinate systems are available. These include solutions based on a conformal transformation, solutions based on the solution of a Poisson equation (Ref 17), and constructive systems. This effort uses a constructive system based on the approach of Eiseman (Ref 18). Shamroth, et al (Ref 7 through 12) have applied the constructive technique to generate C-

type grids for a variety of cascades. The C-type grid requires an approximation of the actual trailing edge geometry by means of a cusped geometry (see Figure 1). Therefore, the computed results based on the C-type grid represent only solutions for approximated geometry instead of realistic ones. The effect of the trailing edge approximation will depend on the type of cascade being considered. In compressor-type cascades, the trailing edge radius is small and the viscous boundary layers are subjected to large adverse pressure gradients. Under these conditions, the blade viscous displacement effects are expected to dominate any trailing edge geometry approximations and, consequently, the cusped approximation should not significantly influence the results for compressor blade calculations. The situation is not as clear, however, for turbine blades. Turbine blades have a large trailing edge radius and their boundary layers are subjected to strong favorable pressure gradients. In transonic flow the pressure distribution and possibly the shock location are sensitive to small changes in the blade shape or the effective blade shape due to viscous effects. In these cases it is not clear if the trailing edge modification inherent in the C-type grid significantly affected results. As the first step in this effort, an O-type grid capability was developed.

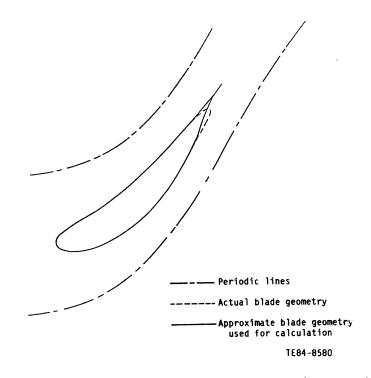


Figure 1. C-type grid for Turner cascade geometry.

A sketch of the O-type grid coordinate system is presented in Figure 2. In brief, the coordinate system consists of a set of two families of curves; the ξ equals constant curves such as lines FG or HI in Figure 2 and the n equals constant curves such as ABCDEA or A'FB'HA' in Figure 2. The coordinate system is constructed by first forming the inner loop A'FB'HA', which includes the blade. The blade may be specified either by an analytic equation or by discrete data points. If an equation is used then construction of the inner loop is straightforward. If the blade is specified by discrete data points then, in general, the points required on the inner loop will not coincide with any point used for blade specification. In this case, a curve fit is used to obtain the required inner loop points. The curve fit is based on a local parabolic fit. For any given point required on the inner loop, a parabola is fitted through three adjacent specifying points, two on the right and one on the left, with the axis of the parabolic normal to the chord line connecting the two outer points. A second parabola is then fitted through the two points on the left and the one on the right. The location of the required point is obtained by means of a weighted average of these curve fits. The weighting factor is determined by the distance from the required point to the center specifying point of each parabola. This calculation is followed by constructing an outer loop ABCDEA, which consists of periodic lines BC and DE, a frontal curve CD, and a rear cap EB. Both the inner and outer loops are then represented by parametric curves x = x(s) and y = y(s) where the parameter varies from zero to unity. The present coordinate generation process uses a two-part transformation for the inner loop. First, x and y are expressed as a function of s', the physical distance along the curve. Then s' is normalized so that its range is between zero and unity. Second, a transformation based on Oh (Ref 19) is applied to the inner loop surface so that higher resolution at the leading and trailing edge of the blade are achieved. The Oh technique uses a truncated series of error functions and complimentary error functions as the basis of the transformation. The feature of the technique is that the locations that require higher resolution and their correspoinding grid point numbers are specified explicitly through input. After applying Oh's transformation, the desired grid point locations are obtained simultaneously.

The outer loop is then parameterized to relate points on the outer loop to corresponding points on the inner loop. For two outer loop points that are periodic, such as G and I in Figure 2, to maintain periodicity, it is necessary that $S_{G} = 1 - S_{I}$. These values will ensure that coordinate points on the upper and lower periodic lines will be periodically aligned.

The present parameterization applies Oh's technique on an iterative basis over surface ABCC' so that the grid point locations are obtained as desired. The grid point locations for the surface C'DEA are obtained by means of correspondence to those on the surface ABCC' again on an iterative basis using Oh's technique. This technique eliminates the complexity of the multipart transformation technique used previously (Ref 7 through 11), and the grid point locations are obtained directly through Oh's transformation.

Following the contruction and determination of the grid point locations for the inner and outer loops, two intermediate loops are constructed as shown in Figure 3. The first intermediate loop is constructed around the blade surface with a normal distance, h_1 , from the inner loop. A similar loop is constructed inside the outer loop with a normal distance, h_2 , from the outer loop. Points on these intermediate loops must then be associated with a parameter s, $0 \le S \le 1$. This association is accomplished as shown in Figure 3 by setting $S_{A'} = S_A$ and $S_{B'} = S_B$. These four loops allow the construction of the pseudoradial lines such as GF of Figure 2 by means of the multiloop method originally developed by Eiseman (Ref 20).

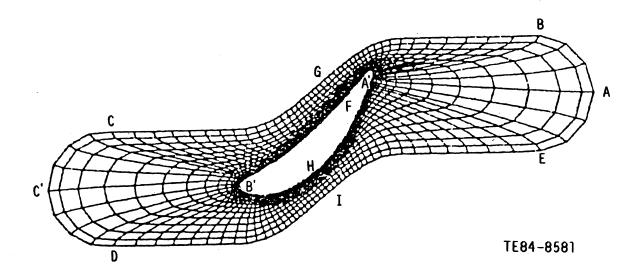


Figure 2. Constructive O-type coordinate system.

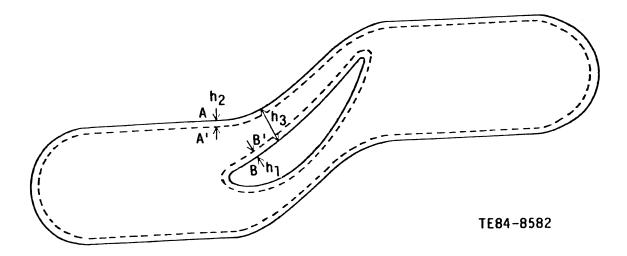


Figure 3. Four basic loops of the constructive coordinate system. The multiloop method requires introduction of a position vector, $\vec{P}(r,s)$, with components (x, y), which will represent the coordinate location of grid points. Based on the four-loop construction process, vectors $\vec{P_i}(s)$ are defined with i = 1, 2, 3, 4. Each $\vec{P_i}$ has a coordinate (x_i, y_i) associated with it at specific values of s through the previously described contruction process. A radial parameter, r_i , is then introduced. This parameter is defined, see Figure 3, as the distance from the loop in question to the inner loop normal-ized by the distance from the outer loop to the inner loop, h_3 . Thus, $r_1 = 0$, $r_2 = h_1/h_3$, $r_3 = (h_3 - h_2)/h_3$, $r_4 = 1$. With the definition of these quantities, the general position vector, $\vec{P}(r, s)$, is related to the loop position vectors, $\vec{P_1}(s)$, $\vec{P_2}(s)$, $\vec{P_3}(s)$, and $\vec{P_4}(s)$, by means of

$$\vec{P}(r,s) = (I-r)^{2}(I-a_{1}r)\vec{P}_{1}(s) + (a_{1}+2)(I-r)^{2}r\vec{P}_{2}(s) + r^{2}[I-a_{2}(I-r)]\vec{P}_{4}(s) + (a_{2}+2)r^{2}(I-r)\vec{P}_{3}(s)$$
(1)

where

$$a_{1} = \frac{2}{3r_{2} - 1}$$

$$a_{2} = \frac{2}{3(1 - r_{2}) - 1}$$
(2)

It should be noted that at r = 0, $\overrightarrow{P}(0,s) = \overrightarrow{P_1}(s)$ and at r = 1, $\overrightarrow{P}(1,s) = \overrightarrow{P_4}(s)$. Further, because at r = 0,

$$\frac{\partial P}{\partial r}(0,s) = \left[\overline{P}_2(s) - \overline{P}_1(s)\right](a_1 + 2) \tag{3}$$

and at r = 1

$$\frac{\partial P}{\partial r}(1,s) = \left[\overline{P}_{4}(s) - \overline{P}_{3}(s)\right](a_{2}+2)$$
(4)

specification of the derivatives at the inner and outer boundaries is determined by the parametric representation of intermediate loops 2 and 3. Thus, the four-loop method allows specification of the boundary point locations and coordinate angles at these boundaries. This method of construction assures that the grid is orthogonal at the inner and outer loop boundaries.

After loops 2 and 3 are constructed to satisfy the coordinate angle at the boundary points, the grid is constructed as follows. If the grid is to contain M pseudoradial lines (such as line FG of Figure 2) and N pseudoazimuthal lines (such as line ABCDEA), the values of the pseudoradial coordinate are r(i) = i/(N - 1), i = 0, 1, 2, ..., N - 1 and the values of the pseudoazimuthal coordinates are s(j) = j/(M - 1), j = 0, 1, 2, ..., M - 1 then the position vector, i.e., the grid locations (x, y) for each point in the grid, is given by Equation (1).

The preceding discussion has assumed a uniform spacing in the radial direction. If radial grid point concentration is desired, it is necessary to assume a radial distribution function, such as

$$R = \left[1 - \frac{\tanh D(1-r)}{\tanh D}\right]$$
(5)

which concentrates points in the wall region. Grid points are then chosen at r(i) = (i)/(N-1) and the analysis proceeds as outlined.

Grids generated with this procedure are shown in Figures 4 and 5. Figure 4 represents a turbine cascade corresponding to the cascade of Turner (Ref 21). The second cascade, shown in Figure 5, corresponds to the C3X turbine cascade (Ref 22).

GOVERNING EQUATIONS

The ensemble-averaged, time-dependent N-S equations used in this project can be written in vector form as continuity

$$\frac{\partial \rho}{\partial t} + \nabla \cdot \rho \overline{U} = 0 \tag{6}$$

momentum

$$\frac{\partial \rho \overline{U}}{\partial t} + \nabla \cdot (\rho \overline{U} \overline{U}) = -\nabla P + \nabla \cdot (\frac{\pi}{\pi} + \pi^{\mathsf{T}})$$
(7)

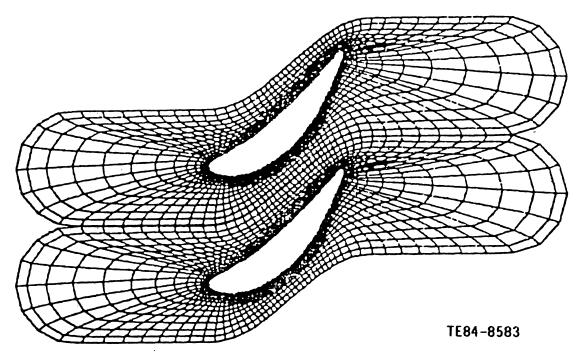


Figure 4. O-type grid coordinate system for Turner cascade.

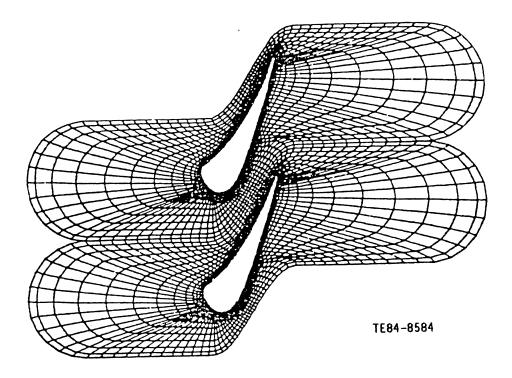


Figure 5. O-type grid coordinate system for C3X cascade.

and energy

$$\frac{\partial \rho h}{\partial t} + \nabla \cdot (\rho U h) = -\nabla \cdot (\overline{Q} + \overline{Q}^{\mathsf{T}}) + \frac{\mathsf{DP}}{\mathsf{D}t} + \Phi + \rho \epsilon \tag{8}$$

where ρ is density, U is velocity, p is pressure, $\overline{\pi}$ is the molecular stress tensor, π^{T} is the turbulent stress tensor, h is enthalpy, \overrightarrow{Q} is the mean heat flux vector, \overrightarrow{Q}^{T} is the turbulent heat flux vector, Φ is the mean flow dissipation rate and ϵ is the turbulence energy dissipation rate. If the flow is assumed as a constant total temperature, the energy equation is replaced by

$$T_{t} = T + \frac{q^{2}}{2C_{p}} = constant$$
(9)

where T_t is the stagnation temperature, q is the magnitude of the velocity, and C_p is the specific heat at constant pressure. In a number of cases considered in this report, constant total temperature has been assumed constant. This assumption was made to reduce computer run time where the constant T_t assumption was warranted. Cases in which this substitution has been made are identified in the description of the results. A number of terms in Equations 6 through 8 require definition. The stress tensor appearing in Equation 7 is defined as

$$\bar{\pi} = 2\mu D - (\frac{2}{3}\mu - \kappa_{\rm B})\nabla \cdot \vec{U} I$$
⁽¹⁰⁾

where ${\rm K}_{\rm B}$ is the bulk viscosity coefficient, I is the identity tensor, and ${\rm I\!\!D}$ is the deformation tensor, defined by

$$\mathbb{D} = \frac{1}{2} \left(\left(\nabla \overline{U} \right) + \left(\nabla \overline{U} \right)^{\mathsf{T}} \right)$$
(11)

In addition, the turbulent stress tensor has been modeled using an isotropic eddy viscosity so that

$$\pi^{\mathsf{T}} = -\rho \overline{\mathbf{u}'\mathbf{u}'} = 2\mu_{\mathsf{T}} \mathbb{D} - \frac{2}{3} (\mu_{\mathsf{T}} \nabla \cdot \overline{\mathbf{U}} + \rho \kappa) \mathbf{I}$$
(12)

where k, the turbulent kinetic energy, and μ_T , the turbulent viscosity, are determined by a suitable turbulence model.

Equation (8) contains a mean heat flux vector defined as

$$\vec{\mathbf{Q}} = -\kappa \nabla \mathbf{T} \tag{13}$$

and a turbulent heat flux vector defined as

$$\vec{Q}^{\mathsf{T}} = -\kappa^{\mathsf{T}} \nabla \mathsf{T} \tag{14}$$

where κ and κ^T are the mean and turbulent thermal conductivities, respectively.

The mean flow dissipation term, Φ , which also appears in Equation (8), is defined as

$$\Phi = 2\mu \mathbb{D} : \mathbb{D} - \left(\frac{2}{3}\mu - \kappa_{\rm B}\right) \left(\nabla \cdot \overline{U}\right)^2 \tag{15}$$

In the equation of state for a perfect gas

 $P = \rho RT$ (16)

where R is the gas constant, the caloric equation of state

 $\mathbf{e} = \mathbf{C}_{\mathbf{v}} \mathbf{T} \tag{17}$

and the definition of static enthalpy

$$h = C_p T$$
(18)

supplement the equations of motion.

Finally the flow properties $\mu,\ \kappa,$ and K_{B} are determined using the following constitutive relations.

The molecular viscosity, μ , is determined using Sutherland's law,

$$\frac{\mu}{\mu_{0}} = \left(\frac{T}{T_{0}}\right)^{3/2} \frac{T_{0} + S_{1}}{T + S_{1}}$$
(19)

where $S_1 = 100^{\circ}K$ for air.

The bulk viscosity is assumed to be zero

and the thermal conductivity is determined by use of a relation similar to Sutherland's law namely

$$\frac{\kappa}{\kappa_0} = \left(\frac{T}{T_0}\right)^{3/2} \frac{T_0 + S_2}{T + S_2}$$
(21)

where $S_2 = 194^{\circ}K$ for air.

DEPENDENT VARIABLES AND COORDINATE TRANSFORMATION

The governing equations, Equations (6) through (8), are written in general vector form. Prior to their application to specific problems, it is necessary to decide on both a set of dependent variables and a proper coordinate transformation. Based on previous investigations (Ref 8), the specific scalar momentum equations to be solved are the x, y, and z Cartesian momentum equations. The dependent variables chosen are the physical Cartesian velocities u, v, w, and the density ρ . If the energy equation is solved, enthalpy is added to the set of dependent variables.

The governing equations are then transformed to a general coordinate system in which the general coordinates, y^j , are related to the Cartesian coordinates, x_1 , x_2 , and x_3 , by

$$y^{j} = y^{j}(x_{1}, x_{2}, x_{3}, t); j = 1, 2, 3$$
 (22)
 $\tau = t$

As implied by Equation 22, the general coordinate, y^{j} , may be a function of both the Cartesian coordinates and time. This coordinate time dependence will have an implication in so far as the choice of governing equation form is concerned.

The governing equations can be expressed in terms of the new independent variables, y^{j} , as

$$\frac{\partial W}{\partial \tau} + \xi_{1} \frac{\partial W}{\partial \xi} + \xi_{x} \frac{\partial F}{\partial \xi} + \xi_{y} \frac{\partial G}{\partial \xi} + \xi_{z} \frac{\partial H}{\partial \xi}$$
$$+ \eta_{1} \frac{\partial W}{\partial \eta} + \eta_{x} \frac{\partial F}{\partial \eta} + \eta_{y} \frac{\partial G}{\partial \eta} + \eta_{z} \frac{\partial H}{\partial \eta}$$
$$+ \zeta_{1} \frac{\partial W}{\partial \zeta} + \zeta_{x} \frac{\partial F}{\partial \zeta} + \zeta_{y} \frac{\partial G}{\partial \zeta} + \zeta_{z} \frac{\partial H}{\partial \zeta}$$

$$= \frac{1}{Re} \left[\xi_{x} \frac{\partial F_{i}}{\partial \xi} + \eta_{x} \frac{\partial F_{i}}{\partial \eta} + \zeta_{x} \frac{\partial F_{i}}{\partial \zeta} + \xi_{y} \frac{\partial G_{i}}{\partial \xi} + \eta_{y} \frac{\partial G_{i}}{\partial \eta} + \zeta_{y} \frac{\partial G_{i}}{\partial \zeta} + \xi_{z} \frac{\partial H_{i}}{\partial \xi} + \eta_{z} \frac{\partial H_{i}}{\partial \eta} + \zeta_{z} \frac{\partial H_{i}}{\partial \zeta} \right]$$
(23)

through a straightforward application of chain rule differentiation. In Equation (23)

.

$$\xi = y'$$
$$\eta = y^2$$
$$\zeta = y^3$$

and

$$W = \begin{bmatrix} \rho \\ \rho u \\ \rho v \\ \rho w \end{bmatrix} \qquad F = \begin{bmatrix} \rho u \\ \rho u^{2} + p \\ \rho u v \\ \rho u w \end{bmatrix} \qquad G = \begin{bmatrix} \rho v \\ \rho u v \\ \rho v^{2} + p \\ \rho v w \end{bmatrix}$$
$$H = \begin{bmatrix} \rho \\ w \\ \rho u \\ \rho v \\ w \\ \rho w \end{bmatrix} \qquad F_{1} = \begin{bmatrix} 0 \\ \tau_{xx} \\ \tau_{xy} \\ \tau_{xz} \end{bmatrix} \qquad G_{1} = \begin{bmatrix} 0 \\ \tau_{xy} \\ \tau_{yy} \\ \tau_{yz} \end{bmatrix} \qquad H_{1} = \begin{bmatrix} 0 \\ \tau_{xz} \\ \tau_{yz} \\ \tau_{zz} \end{bmatrix}$$

The governing equations have been written in this form in Ref 7 through 12; the form is termed the semistrong conservation form in Ref 23, and the chain rule conservation form in Ref 24. The metric coefficients do not appear within the derivatives. The experiences of Ref 7 through 12 show that results obtained by means of the semistrong conservation form are less sensitive to the method used to evaluate the metric coefficients than are results obtained by means of strong conservation form. The semistrong conservation form was used in this effort.

TURBULENCE MODELING

Several alternative turbulence models have been considered in the course of this effort. In general terms, the models used were zero-, one-, and two-equation models.

Zero-Equation Model--Mixing Length

Of all of the available turbulence models, Prandtl's mixing length model is probably still the most widely used. The model was originally developed for use in unseparated boundary layer flow situations and has been shown to perform well under such conditions. An economical advantage of the method is that it does not require additional transport equations to model the effect of turbulence, but rather relates the Reynold's shear stress to mean flow quantities by means of

$$-\overline{\rho u'_{i}u'_{j}} = \mu_{T} \frac{\partial U_{j}}{\partial x_{i}}$$
(24)

where

$$\mu_{T} = \rho l^{2} (2D:D)^{1/2}$$

where

$$l = \min \left[l_{\infty}, \kappa dD \right]$$

where d is the normal distance to the nearest wall and D is the van Driest damping coefficient given by

$$D = 1 - \exp(-y^{+}/A^{+})$$

$$L_{\infty} = 0.09\delta$$

$$\kappa = 0.4$$

$$y^{+} = du_{\tau}/\nu$$

$$u_{\tau} = (\tau_{g}/\rho)^{1/2}$$
(25)

where the local shear stress $\tau_{\underline{\varrho}}$ is obtained from

$$\tau_{1} = (2D:D)^{1/2}$$
 (26)

and D is defined by Equation (11).

One problem in the mixing length formulation is the definition of δ . In boundary layers the streamwise velocity, U, approaches an edge velocity, U_e, asymptotically, however a monotonic approach to an asymptotic edge velocity is not characteristic of N-S solutions. To avoid the ambiguity of determining the boundary layer edge, δ , as defined in the usual boundary layer context, i.e., δ is the distance from the wall at which U/U_e = 0.99, the following relation is used

$$\delta = 2.0 d_{(q/q_{MAX}} = c)$$
(27)

In other words, δ , is taken as twice the distance (measured away from the nearest wall) for which $q/q_{max} = c$. The value of c used in the present ef-fort was 0.81.

The model used in the wake is also a mixing length model in which the mixing length was made proportional to the wake height, δ , and a linear growth of δ with distance was assumed based on the classical free jet boundary results (Ref 25). With the free jet boundary growth assumption

$$\delta = (\delta_{PS} + \delta_{SS}) + (0.2)(x - x_{TE})$$
⁽²⁸⁾

where δ_{ps} and δ_{ss} are the pressure and suction surface trailing edge boundary layer thickness and x_{te} is the trailing edge location. The mixing length, Q, was taken as 0.28.

One-Equation Model--k-&

Although the mixing length concept is valid for a variety of flows, some important flow situations arise in which a less restrictive model is required. One such model is the one-equation turbulence model (Ref 26) in which a transport equation for turbulence kinetic energy, k, is formulated

$$\frac{\partial \rho \kappa}{\partial t} + \nabla \cdot (\rho \overline{U} \kappa) = \nabla \cdot (\frac{\mu_{\tau}}{\sigma_{\kappa}} \nabla \kappa) + 2\mu_{\tau} (\mathbb{D} : \mathbb{D}) - \rho \epsilon$$
(29)

where (following Ref 27) σ_k is set to 1.0, and k is the turbulence kinetic energy

$$K = 2 \overline{u' \cdot u'}$$

and the Prandtl-Kolmogorov relation, Equation (30), defines the turbulent viscosity as

$$\mu_{\tau} = C_{\mu} \frac{\rho \kappa^2}{\epsilon}$$
(30)

In addition, the turbulence dissipation rate ϵ is determined by

$$\epsilon = C_{\mu}^{3/4} \frac{\kappa^{3/2}}{l}$$
(31)

where l is a relevant turbulent length scale for the problem of interest. The k-l model has an advantage over the mixing length scale model in that the use of a transport equation for turbulence kinetic energy allows for its convection, production, and dissipation. This is important because it allows a nonequilibrium effect on the turbulence to be included in the calculation while the mixing length model can only account for local equilibrium turbulence effects by means of its association with the mean velocity field. A major disadvantage that the k-l model shares with the mixing length model is the requirement of length scale specification. Typically the mixing length, as described previously, is used as the representative length scale.

There are two approaches to modeling the flow in the near wall region where low local turbulence Reynolds numbers occur. The first is the wall function approach that does not resolve the near wall region but assumes specific function forms for the required turbulence quantities and uses these forms to create the required normal derivative formulations at the first grid point from the wall. Such an approach obviously requires a detailed knowledge of the turbulence model dependent variables in the vicinity of the wall. Although reasonable function formulations can be specified for simple 2-D flows such as constant pressure boundary layers, specification in the much more complex flows is more difficult. Therefore, the alternative approach in which the viscous sublayer is resolved has been used. The method makes no approximation at the boundary, but requires that the near wall low turbulence Reynolds number physics be modeled. In this effort, a near wall model, which was successfully used by Shamroth and Gibeling (Ref 28) in a time-dependent airfoil flow field analysis, has been implemented in the computer code. The analysis of Ref 28 follows the integral turbulence energy procedure of Ref 26 by using a turbulence function, a₁, where

$$a_{1} = \frac{1}{2} c_{\mu}^{1/2}$$
(32)

and a_l is taken as a function of a turbulence Reynolds number of the form

$$a_{1} = a_{0} \left[\frac{f(R_{\tau})}{100} \right] / \left[1.0 + 6.66 \ a_{0} \left(\frac{f(R_{\tau})}{100} - 1 \right) \right]$$
(33)
$$a_{0} = .0115$$

where

$$f(R_{\tau}) = 100 R_{\tau}^{0.22} \qquad R_{\tau} \leq 1$$

$$f(R_{\tau}) = 68.1 R_{\tau} + 614.3 \qquad R_{\tau} \geq 40$$
(34)

and a cubic curve was fitted for values of R_{τ} between 1 and 40. In this effort, R_{τ} was defined as the local ratio of turbulent to laminar viscosity, a_{1} was evaluated by means of Equation (33) and C_{μ} related to a_{1} by means of Equation (32). As previously discussed, Ref 26 used an integral form of the turbulent kinetic energy and, therefore, R_{τ} was defined as an average value.

$$R_{\tau} = \frac{1}{\delta} \int_{0}^{\delta} v_{\tau} \, dy \, / \frac{1}{\delta} \int_{0}^{\delta} v \, dy_{s}$$
(35)

Two-Equation Model--k-e

Although the one-equation approach does relieve some restrictions in the mixing length approach, it still requires specification of a length scale. The k- ε , two-equation turbulence model (Ref 29 and 30), in which both the turbulence kinetic energy and the turbulence dissipation rate are governed by transport equations, represents a more general model. In this approach, the k-equation is as given in Equation (29), but the algebraic relation for ε given by Equation (31) is replaced by the following transport equation.

$$\frac{\partial \rho \epsilon}{\partial t} + \nabla \cdot (\rho \cup \epsilon) = \nabla \cdot (\frac{\mu_{\mathsf{T}}}{\sigma_{\epsilon}} \nabla \epsilon) + C_{\mathsf{I}} (2\mu_{\mathsf{T}} \mathbb{D} : \mathbb{D}) \frac{\epsilon}{\kappa} + 2\mu \mu_{\mathsf{T}} (\nabla^2 \cup)^2 - C_2 \rho \frac{\epsilon^2}{\kappa}$$
(36)

However, attempts to solve Equations (29) and (36) without modification present problems because an appropriate boundary condition for ε at a solid boundary is difficult to prescribe such that Equation (36) is satisfied. Following the suggestion of Jones and Launder (Ref 27), the turbulence dissipation equation has been modified by the inclusion of the term

in the energy dissipation equation, Equation (36), and by the inclusion of the term

in the turbulence energy equation which then becomes

$$\frac{\partial \rho \kappa}{\partial t} + \nabla \cdot (\rho \overrightarrow{U} \kappa) = \nabla \cdot (\frac{\mu_{\mathsf{T}}}{\sigma_{\mathsf{K}}} \nabla \kappa) + 2\mu_{\mathsf{T}} (\mathbb{D} : \mathbb{D}) - \rho \epsilon - 2\rho \nu (\nabla \kappa^{1/2})^2$$
(37)

These additional terms allow an ε = o wall boundary condition to be applied and appear to correctly model the near wall region as discussed in Ref 27.

Following Ref 27, the following empirical relations are used

$$\sigma_{\epsilon} = 1.3$$

$$\sigma_{k} = 1.0$$

$$C_{1} = 1.43$$

$$C_{\mu} = 0.09 \exp\left[-2.5/(1 + R_{\tau}/50)\right]$$

$$C_{2} = 1.92 \left[1.0 - 0.3 \exp\left(-R_{\tau}^{2}\right)\right]$$

and R_{τ} is defined as

$$R_{\tau} = \frac{\rho k^2}{\mu \epsilon}$$

The turbulent eddy viscosity is evaluated by Equation (30).

BOUNDARY CONDITIONS

Boundary conditions play an important role in determining accurate solutions and rapid numerical convergence when solving N-S equations. The boundary conditions used in these calculations follow the suggestion of Briley and McDonald (Ref 31), which specifies upstream total pressure and downstream static pressure conditions. For the 2-D cascade system shown in Figure 2, BC and ED are periodic boundaries and periodic conditions are set here.

Specification of upstream and downstream conditions is somewhat more difficult. For an isolated cascade, boundary conditions for the differential equations may be known at both upstream infinity and downstream infinity. However, since computation economics argues for placing grid points in the vicinity of the cascade and minimizing the number of grid points far from the cascade, the upstream and downstream computational boundaries should be set as close to the cascade as is practical. In addition, with the particular body-fitted coordinates used, as the upstream boundary moves further upstream, the angle between pseudoradial and pseudoazimuthal coordinate lines becomes smaller. Decreasing the coordinate angle causes the coordinate system to become less well-conditioned, increases truncation error (Ref 32), and increases the role of crossderivative terms in the equations. All of these characteristics could be detrimental to the present numerical procedure and, therefore, they also argue for placing the upstream boundary as close to the cascade as possible. However, when the upstream boundary is placed close to the cascade, most flow function conditions on the boundary will not be known, because these will have been changed from values at infinity by the presence of the cascade.

In this effort, total pressure is set on boundary CC'D, shown in Figure 2 (Ref 31). Unless boundary CC'D is very far upstream, the flow velocity along this boundary will not be equal to the velocity at upstream infinity because some inviscid deceleration will have occurred. However, as long as the boundary is upstream of the region of any significant viscous or shock phenomena, the total pressure on this boundary will be equal to the total pressure at upstream infinity. Hence, total pressure is an appropriate boundary condition realistically modeling the desired flow condition. In addition to specifying upstream total pressure, it is necessary to specify the inlet flow angle. In these calculations, a value was assumed constant on the upstream boundary at a specified value, although it is possible that in future studies the inflow angle distribution could be obtained from an inviscid calculation. The third condition set on the upstream boundary concerns the density. A zero density derivative at this boundary was specified as a numerical treatment of the boundary.

The downstream boundary EAB is considered to be far away from the blade surface. A small portion of the boundary may contain inlet flow depending on the turning of the passage flow. For this inlet flow portion, the flow variables were set equal to those at the end of the periodic line, e.g. at point E in Figure 2. For outflow portion, the boundary was treated by setting a constant static pressure as a boundary condition, and by extrapolating (first derivatives) both velocity components along exit flow direction at this location. In the present application, a constant static pressure was set at downstream infinity, and hence it is assumed that the downstream boundary is located in a region where pressure is uniform.

Both the upstream and downstream boundaries have boundary conditions that are nonlinear functions of the dependent variables associated with them. These conditions are the specifications of total pressure on the upstream boundary and static pressure on the downstream boundary. These nonlinear boundary conditions are linearized in the same manner as the governing equations (by means of a Taylor expansion of the dependent variables in time), and then solved implicitly along with the interior point equations. No-slip conditions (except the film cooling option) together with zero pressure gradient were set at solid walls. If film cooling is applied on the blade surface, a wall velocity is specified by means of input for the portion of that surface.

For a three-dimensional (3-D) rectilinear cascade configuration, which consists of a turbine cascade situated in the azimuthal-radial plane and bounded in the transverse direction by an endwall and a symmetry plane (see Figure 6), the incoming flow at the upstream boundary is in boundary layer form due to the endwall and not a uniform stream as in the 2-D unbounded cascade. A two-layer velocity profile condition in place of a uniform velocity profile condition was set at the upstream boundary. The so-called two-layer model (Ref 31) used at the inflow boundary is essentially a total pressure boundary condition applied to the core flow with a specified boundary layer profile shape for the wall region. Matching the static pressure at the edge, defined by the first computational point from the wall at which |u|/|u| max was greater than or equal to 0.99 on the previous time step, enables calculation of [u] at this point. This calculation provides the required normalizing value for the prespecified boundary layer profile shape. Overall, the method provides a mechanism for drawing mass flow to satisfy the downstream pressure given an upstream core total pressure while maintaining a given inlet endwall boundary layer shape. This specification corresponds to a wind tunnel experiment where stagnation conditions are set in an upstream reservoir and static pressure is set at some downstream location. No-slip conditions in conjunction with zero pressure gradient were set on the endwall. Symmetry boundary conditions were applied on the symmetry plane. The other necessary boundary conditions were treated the same as those for the 2-D case.

The present formulation contains several important advantages over alternative formulations. Specification of upstream total pressure and downstream static

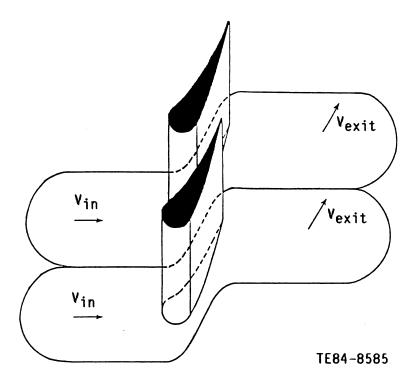


Figure 6. Three-dimensional C3X cascade with endwall.

pressure allows the flow to develop in a natural manner with no need to specify the velocity magnitude on the upstream boundary. Proper specification of the velocity magnitude on the upstream boundary may be difficult for 2-D cases and is difficult in transonic cascades and/or 3-D cascades. In addition, specification of no-slip conditions at solid surfaces eliminates the problem of specifying a wall function. Although wall functions may be appropriate for relatively simple 2-D flow, their use becomes questionable for 2-D separated flows. In 3-D flows, near wall flows are not well described by such universal laws and, consequently, their use in these cases does not seem appropriate, particularly if heat transfer or loss information is required. Use of the no-slip condition along with proper resolution of the boundary layer does not hinder convergence properties of the numerical method.

NUMERICAL PROCEDURE

The numerical procedure used to solve the governing equations is a consistently split LBI scheme originally developed by Briley and McDonald (Ref 13). A scheme similar in concept has been developed for 2-D magnetohydrodynamic problems by Lindemuth and Killeen (Ref 33) as discussed in Ref 13 and 34. The method can be outlined briefly as follows: the governing equations are replaced by an

implicit time difference approximation, either a backward difference or Crank-Nicolson scheme. Terms involving nonlinearities at the implicit time level are linearized by Taylor expansion in time about the solution at the known time level, and spatial difference approximations are introduced. The result is a system of multidimensional coupled (but linear) difference equations for the dependent variables at the unknown or implicit time level. To solve these difference equations, the Douglas-Gunn (Ref 35) procedure for generating alternating direction implicit (ADI) schemes as perturbations of fundamental implicit difference schemes is introduced in its natural extension to systems of partial differential equations. This technique leads to systems of coupled linear difference equations with narrow block-banded matrix structures, which can be solved efficiently by standard block-elimination methods.

The method centers around the use of a formal linearization technique adapted for the integration of initial-value problems. The linearization technique, which requires an implicit solution procedure, permits the solution of coupled nonlinear equations in one space dimension (to the requisite degree of accuracy) by a one-step noniterative scheme. Because no iteration is required to compute the solution for a single time step, and because only moderate effort is required for the solution of the implicit difference equations, the method is computationally efficient. This efficiency is retained for multidimensional problems by using block ADI techniques. The method is also economical in terms of computer storage, requiring only two time levels of storage for each dependent variable. In addition, the block ADI technique reduces multidimensional problems to sequences of calculations that are one-dimensional (1-D) in the sense that easily-solved narrow block-banded matrices associated with 1-D rows of grid points are produced. A more detailed discussion of the solution procedure as discussed by Briley, Buggeln, and McDonald (Ref 36) is given in Appendix A.

ARTIFICIAL DISSIPATION

Due to frequent high Reynolds numbers typical of normal turbomachinery applications, it is necessary to suppress spatial oscillations associated with central spatial difference approximations. Such suppression can be achieved by means of a dissipative spatial difference formulation (e.g., one-sided difference

approximations for first derivatives) or by explicitly adding an additional dissipative-type term. For the N-S equations, the latter approach has been selected because when an additional term is explicitly added, the physical approximation being made is clearer than when dissipative mechanisms are contained within numerical truncation errors. Explicit addition of an artificial dissipation term also allows greater control over the amount of nonphysical dissipative mechanism to suppress oscillations without deteriorating solution accuracy. Various methods of adding artificial dissipation were investigated in Ref 11, and these methods were evaluated in the context of a model 1-D problem containing a shock with a known analytic solution (1-D flow with heat transfer). The methods that were considered included second-order dissipation, fourth-order dissipation, and pressure dissipation techniques.

As a result of this investigation, it was concluded that a second-order anisotropic artificial dissipation formulation suppressed spatial oscillations without adversely impacting accuracy and could be used to capture successfully the nearly normal shocks that are expected in transonic cascades. In this formulation the terms

$$\begin{array}{c} n-1 & \frac{\partial}{\partial x} \left(d & \frac{\partial \phi}{\partial x} \right), \quad n-1 & \frac{\partial}{\partial y} \left(d & \frac{\partial \phi}{\partial y} \right) \end{array}$$

are added to the governing equations where $\phi = u$, v, h, and ρ for the xmomentum, y-momentum, energy, and continuity equations, respectively. The exponent n is zero for the continuity equation and unity for the momentum and energy equations. The dissipation coefficient d_x is determined as follows. The general equation has an x-direction convective term of the form a $\partial \phi/\partial x$ and an x-direction diffusion term of the form $\partial(b\partial \phi/\partial x)/\partial x$. The diffusive term is expanded

$$\partial(b \partial \phi/\partial x)/\partial x = b \partial^2 \phi/\partial x^2 + \partial b/\partial x \partial \phi/\partial x$$
(38)

and then a local cell Reynolds number, $Re_{\Lambda X}$, is defined for the x-direction by

$$\operatorname{Re}_{\Delta x} = \left| a - \frac{\partial b}{\partial x} \right| \Delta x / b \tag{39}$$

where b is the total or effective viscosity including both laminar and turbulent contributions and Δx is the grid spacing. The dissipation coefficient d_x is not negative and is chosen as the larger of zero and the local quantity $\sigma_x \operatorname{Re}_{\Delta x} - 1$). The dissipation parameter σ_x is a specified constant and represents the inverse of the cell Reynolds number below which no artificial dissipation is added. The dissipation coefficient d_y is evaluated in an analogous manner and is based on the local cell Reynolds number $\operatorname{Re}_{\Delta y}$ and grid spacing Δy for the y-direction and the specified parameter σ_y .

The question arises as to which values of $\sigma_{_{f X}}$ and $\sigma_{_{f V}}$ should be chosen. This question was assessed both through the model problem (Ref 11), and through calculations for a Jose Sanz compressor cascade (Ref 7 and 11). These results indicated that values of σ = 0.5, which corresponds to a cell Reynolds number 2 limitation, would severely damp physical variations. However, when σ was set in the range 0.025 $\leq \sigma \leq$ 0.05, which corresponds to a cell Reynolds number range between 40 and 20, spurious spatial oscillations were damped with no significant change in the calculated results as σ was varied in this range. As discussed in Ref 7 through 11, the results showed good agreement with data. This agreement has since been confirmed at several other studies at Scientific Research Associates (SRA) such as 2-D and 3-D transonic nozzle flows (Ref 37) where a maximum acceptable value of $\sigma = 0.10$ has been noted for most problems. In cases where spatial resolution may be marginal, such as at the leading edge of a relatively sharp edged blade, it may be necessary to increase σ in this local area. However, σ can be decreased to 0.10 or below if computational grid points are added in this region.

IV. TEST CASES AND RESULTS

Several test cases were run to demonstrate and assess the computer code for the Navier-Stokes (N-S) analysis. The first case examined the two-dimensional (2-D) Turner turbine cascade (Ref 21). The second case examined the 2-D low solidity C3X turbine cascade (Ref 22). The final case considered was a threedimensional (3-D) rectilinear C3X cascade.

CASE 1--2-D TURNER TURBINE CASCADE

To assess the impact of the new O-type grid on the calculated turbine cascade flow fields, a series of N-S computations were run for the Turner cascade with a rounded trailing edge. The Turner O-type grid is shown in Figure 4 and contains no approximations in the trailing edge geometry. The results of these calculations were compared with the results obtained with the C-type grid for the Turner case with a cusped trailing edge (Figure 7) under the same flow conditions. As shown in Figure 1, the cusp is added by increasing the chord to keep as much of the geometry exact as practical.

The C-type coordinate system, shown in Figure 7, consists of 30 points in the pseudoradial direction and 113 points in the pseudoazimuthal direction. The periodic boundary is extended 0.75 chords upstream of the leading edge. The O-type coordinate system, shown in Figure 4, consists of 30 points in the pseudoradial direction and 100 points in the pseudoazimuthal direction. The periodic boundary is extended 0.9 chords upstream of the leading edge and 1.0 chords downstream of the trailing edge, respectively. The first coordinate line off the airfoil is placed at approximately 4 x 10⁻⁵ chords from the surface for both C- and O-type coordinate systems, thus obtaining adequate boundary layer resolution. The geometric inlet angle for the Turner cascade is approximately 0 deg and the geometric exit angle is approximately 62 deg. The blade pitch to chord ratio is approximately 0.65 and the blade shape has a relativaely large radius of curvature at the leading edge.

The first flow considered was assumed to be subsonic, laminar, and at constant total temperature. The calculation was run with a free-stream Reynolds number based on chord and inlet conditions of approximately 400 and a ratio of inlet

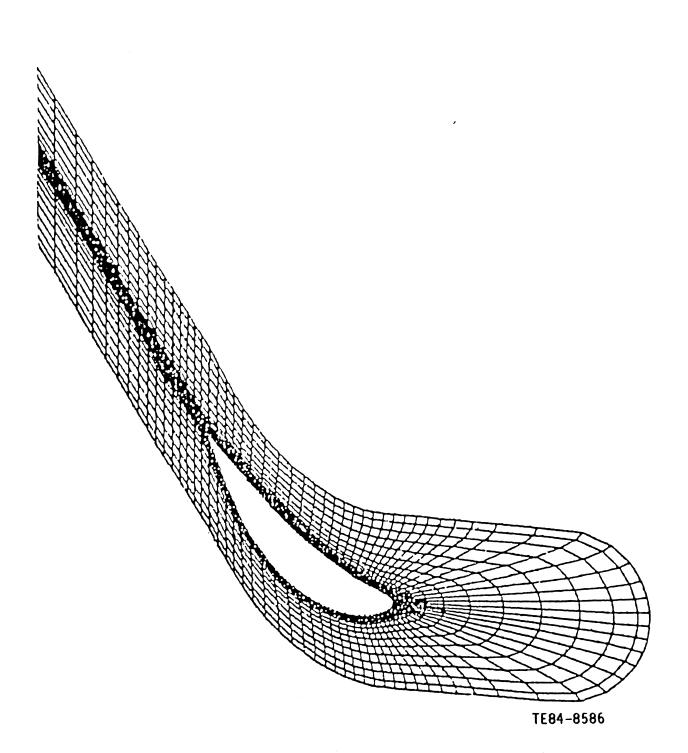


Figure 7. C-type coordinate system for Turner cascade.

total pressure to exit static pressure of approximately 1.25. The calculations were initiated by assuming uniform flow with a boundry layer correction on the airfoil surface. With these initial conditions, it took about 80 time steps to reach converged solutions for both C- and O-type coordinate systems. In all cases, convergence was monitored by noting the decrease in maximum flow field residual. Based on previous experience, the solution can be considered converged when the maximum residual has decreased by three orders of magnitude from its initial value and only small changes are occurring in the calculated pressure and velocity distributions for a range of time step sizes. In Figure 8, the pressure coefficient of the two coordinate systems is compared. The C-type grid blade is longer due to the cusped trailing edge. The results are in excellent agreement for both the suction and pressure surfaces except in the vicinity of the trailing edge, which is not unexpected in light of the different trailing edge geometries for the two calculations.

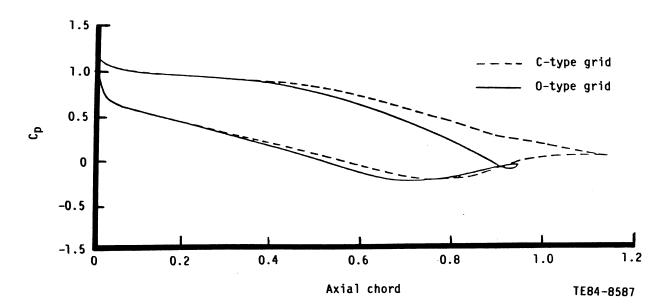


Figure 8. Pressure coefficients distribution of the subsonic laminar cascade.

The second flow considered was similar to the laminar one except the freestream Reynolds number based on chord and inlet conditions was approximately 0.527×10^{6} and the flow was assumed to be turbulent. Using the convergent solution obtained from the laminar flow calculation as the initial condition and the mixing length turbulence model, 60 time steps were required to reach a converged solution. Good agreement was obtained for the turbulent subsonic case as can be seen in Figure 9.

The final flow considered was a transonic turbulent flow corresponding to Turner's experiment (Ref 21). The free-stream Reynolds number based on chord and inlet conditions was approximately 0.884×10^6 and the ratio of the inlet total pressure to the exit static pressure was approximately 1.778. Total temperature was assumed to be constant in the flow field. The calculations used the solution of the turbulent subsonic case as the initial condition, then the inlet total to exit static pressure ratio was increased linearly from 1.25 to 1.778 within 15 time steps. Using the mixing length turbulence model, convergent solutions were obtained within about 80 time steps for both coordinate

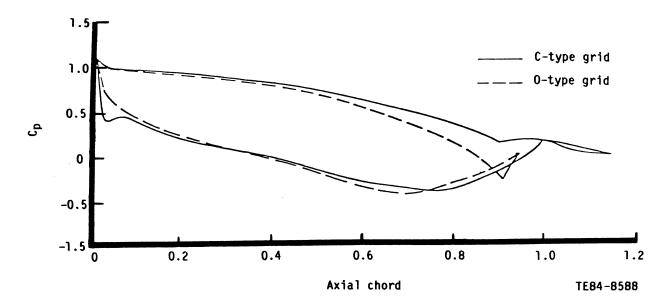


Figure 9. Pressure coefficients distribution of the subsonic turbulent cascade.

systems. In Figure 10, the surface pressure distribution (in terms of velocity ratio) for the two calculations is compared with the data of Turner (Ref 21). Both calculations are comparable with one another over the entire airfoil and both agree with the data over most of the surface except near the trailing edge. In view of the excellent agreement between the two calculations, it is concluded that the discrepancy between the measured data and C-type grid calculations originally noted in Ref 7 are not due to the approximated trailing edge geometry in the C-type grid calculation. In addition, the calculation confirms the operation of the N-S code in the O-type grid mode.

An inspection of Figure 10 reveals that both the O- and C-type grid calculations underpredict the pressure in a similar manner in the region of 60-80% chord on the suction surface. There are several possible sources for this discrepancy. Computationally, the turbulence transition model could give rise to the observed differences. Experimentally, one possible source could be endwall effects changing the axial velocity density ratio (AVDR) from unity. If this change were to occur, it would be particularly important at transonic speeds when the flow field becomes sensitive to the effective area ratio and neglect of a nonunity AVDR could lead to significant discrepancies. In view of the absence of endwall effect discussion in Ref 21, which focused primarily on transitional boundary layers, it is difficut to assess the actual source of the discrepancy. Because the intent of this effort was to verify the suitability of the O-type grid, no further investigation of this question was undertaken.

CASE 2--2-D C3X TURBINE CASCADE

The coordinate system for the C3X turbine cascade is shown in Figure 5. This O-type grid consists of 30 points in the pseudoradial direction and 120 points in the pseudoazimuthal direction. In keeping with the objectives of the construction procedure, the minimum coordinate intersection angle is 20 deg and the upstream boundary is placed at 2.25 axial chords upstream of the leading edge and the downstream boundary is placed at 2.65 axial chords downstream of the trailing edge. High radial resolution is obtained near the surface of the blade, and the first coordinate line is located at a distance of 1.0 x 10^{-6} axial chords from the surface. In addition, high pseudoazimuthal resolution

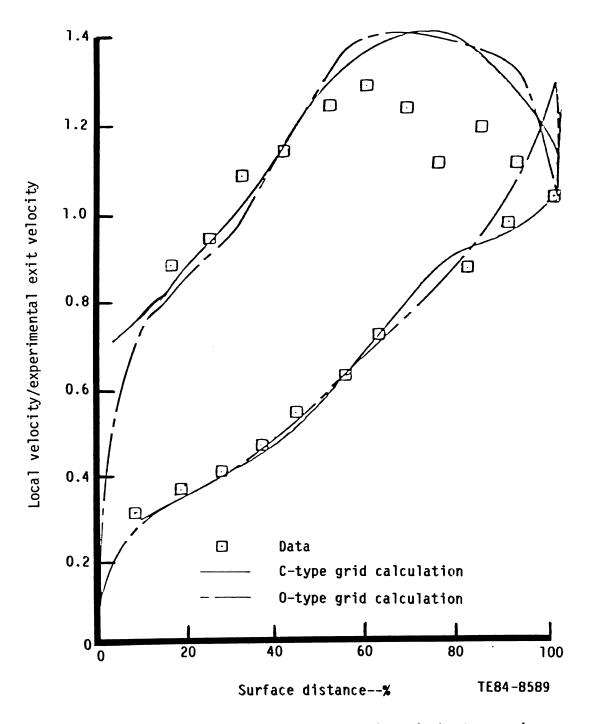


Figure 10. Turner cascade pressure distribution of the transonic case.

is obtained in both leading and trailing edge regions. The C3X cascade geometry is given in detail in Ref 22. The geometric inlet angle is approximately 0 deg and the geometric exit angle is approximately 72 deg. The vane spacing to axial chord ratio is approximately 1.5. The true chord to axial chord ratio is approximately 1.85.

The first flow examined corresponded to case 143 in Ref 22 in which the inlet Mach number, Ma₁, was 0.17, the exit Mach number, Ma_{exit}, was 1.05, the inlet Reynolds number based on true chord, Re_1 , was 0.63 x 10⁶, and the estimated ratio of inlet total to exit static pressure, P_t/P_{exit} , was 2.0. The exit data given in Ref 22, i.e., the average Mach number downstream of the trailing edge, is not suitable for specifying boundary conditions at the downstream boundary of the computational domain as required by the N-S procedure (2.65 axial chords downstream of the trailing edge). In this computational domain, the flow is subsonic at the rear cap. Thus a static exit pressure can be specified. However, a sensitivity study of the effect of P_t/P_{exit} on surface pressure distribution was undertaken, where P_{t} is the upstream stagnation pressure, and P exit is the static pressure at the downstream boundary of the computational domain. Two values of P_t/P_{exit} were chosen, 1.9 and 2.0. Constant total temperature was assumed in the calculation. The computed pressure distribution is shown in Figure 11 and is compared with the Allison experimental data (Ref 22) and the inviscid predictions (Ref 1) due to Delaney.

Figure 11 indicates that the pressure distributions on the pressure side of the turbine blade and the forward portion of the suction side are relatively insensitive to P_t/P_{exit} . However, the pressure distribution on the aft portion of the suction side is sensitive to the pressure ratio, in that a 5% change in P_t/P_{exit} results in a commensurate pressure variation on the blade's surface. Such behavior is not unexpected because the flow through the cascade is in the transonic regime and indicates a need for definitive specification of boundary conditions if a data comparison is to be made.

Mixing length and two-equation $k-\varepsilon$ turbulence modeling were employed in the calculation, and the results of the calculations indicate little difference in the prediction of the pressure coefficent. The study of the interaction between shock wave and boundary layer in the transonic flow field was not

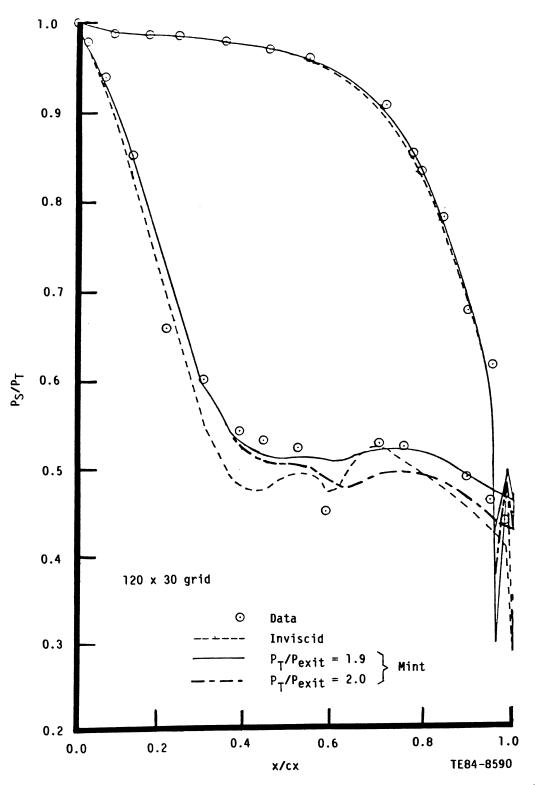


Figure 11. Comparison of measured and calculated pressure distribution of the C3X cascade.

pursued. The mechanism of the transonic shock wave and boundary layer interactions were reported recently by Roscoe, et al (Ref 38).

The second flow considered was case 144 in Ref 22. In this case, heat transfer effects were included in the calculation. The flow conditions were as follows: the inlet Mach number, Ma_1 , was 0.16, the inlet total temperature, T_+ , was 815°K, the exit Mach number, Ma₂, was 0.9, the exit Reynolds number based on true chord, Re₂, was 2.43 x 10^{6} , the estimated P_t/P_{exit} was 1.66, and the freestream turbulence intensity, Tu, was 6.5%. The surface temperature distribution of the turbine blade is shown in Figure 12. The solid line in the figure represents the actual surface temperature used in the calculation and the dot symbol represents the data given in Ref 22. The boundary conditions for the energy equation, Equation (8), are specified as follows: total temperature is held constant at the upstream inlet; surface temperature distribution is specified through input by means of Figure 12; conditions on periodic and downstream boundaries are treated similarly to other variables at the same boundaries. When compared with the Allison experimental data and inviscid predictions in Figure 13, the calculations indicate excellent agreement. To indicate the relationship between the predictions and the experimental scatter, data from cases 148 and 158 are also shown in Figure 13. The inviscid pressure calculations show close agreement with the computed N-S results. Close agreement was expected because this is an on-design case in which viscous displacement effects are expected to be small. Significant discrepancies would be expected at off-design conditions. Three turbulence models were employed; these

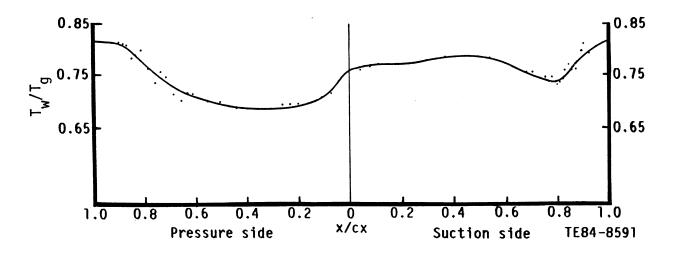


Figure 12. Surface temperature distribution for case 144.

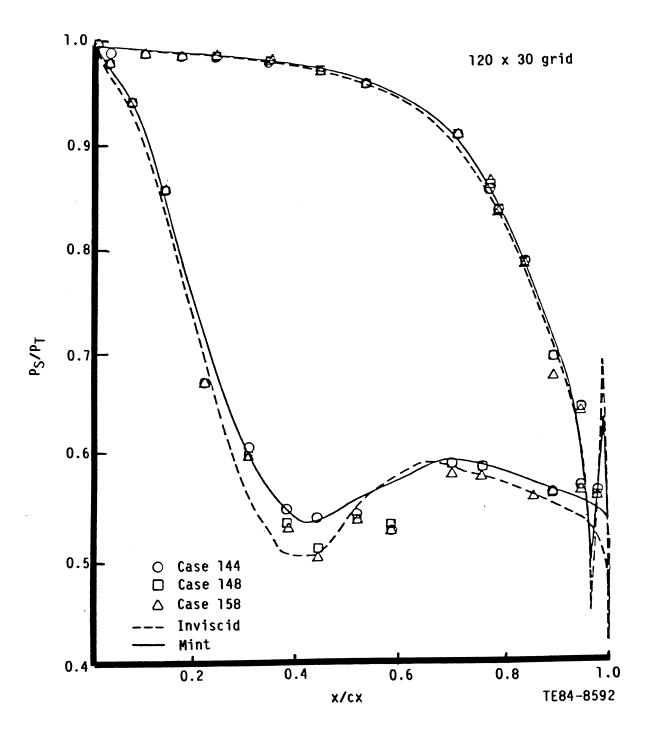


Figure 13. Comparison of measured and calculated pressure distributions of the C3X cascade for cases 144, 148, and 158.

were a mixing length model, a k-2 one-equation model, and a $k-\varepsilon$ two-equation model. Computed results based on these three models show little difference in the pressure distribution. A vector velocity plot is presented in Figure 14. The turning of the flow as it passes through the cascade is evident. The flow turning (the exit angle) is predicted by the analysis rather than being an input item. The flow acceleration as it passes through the cascade is also shown as is the stagnation region and the wall boundary layer development.

The energy equation was coupled with momentum equations during this calculation. In these calculations, the laminar Prandtl number, Pr, was set to 0.73 and the effective turbulent Prandtl number, Pr_t , was set to 0.9. Addition of the energy equation to the governing set made little difference to the calculated pressure distribution, however it allows the calculation of the surface heat transfer coefficient. Surface heat transfer prediction on a turbine blade

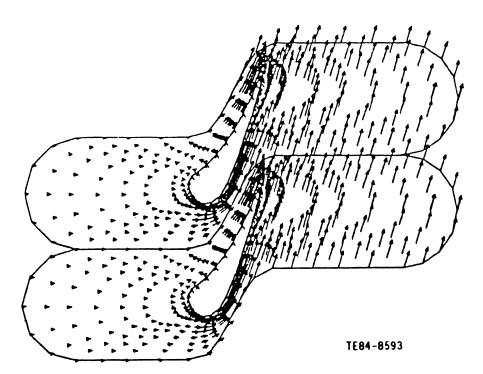


Figure 14. Vector plot for C3X cascade, case 144.

represents a stringent test due to the flow field character. The turbine passage flow field starts from laminar at upstream and then undergoes transition and becomes fully turbulent. The calculation of the transitional behavior represents a difficult factor in the prediction for the heat transfer coefficient. Two cases were considered in employing a mixing length turbulence model; fully turbulent flow and transitional flow in the stagnation region. As can be seen in Figure 15, the fully turbulent flow case overpredicts the heat transfer coefficient particularly in the stagnation zone. In view of this behavior, a transition model was incorporated to investigate the effects on heat transfer. Laminar flow was assumed in the region where x/cx is less than 0.2, followed by a transitional zone based on the correlation of Dhawan and Narasimha (Ref 39), and thereafter by fully turbulent flow. The predictions obtained with this simple model compare well with the experimental data.

Although this empirical transition model has given good agreement with data, models containing less empiricism would be desirable. One such model, which has been used successfully for a variety of transitional flows, is the model

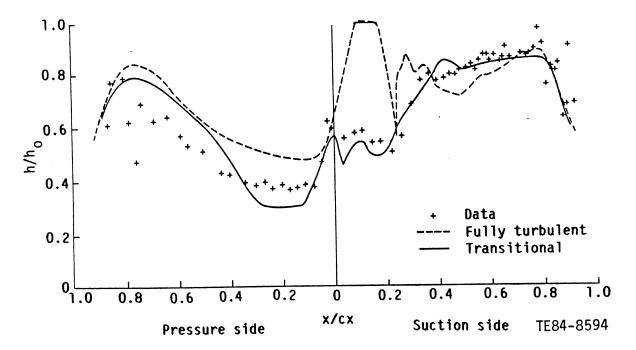


Figure 15. Comparison of measured and calculated heat transfer coefficient distributions of the C3X cascade.

of McDonald and Fish (Ref 26), which is based on an integral turbulence energy equation and has been used in conjunction with a finite difference boundary layer analysis. This model has been generalized from the integral equation formulation to the full partial differential equation formulation by Shamroth and Gibeling (Ref 28) and incorporated in the N-S code.

This K-& model predicts the transport history of the turbulence kinetic energy and includes the effect of free-stream turbulence. Although this model has not been thoroughly tested under this effort, it may represent a promising approach to transitional calculations and is under study by SRA personnel.

The final 2-D flow considered was case 144 with the film-cooling option. For purposes of calculation, it was assumed that air was injected at 30 deg to the suction side over 0.8 < x/cx < 0.9 at a velocity of 7% of free stream and the local surface temperature of the blade was kept fixed at the same value as the nonblowing option. A mixing length turbulence model in conjunction with the transition model used in the nonfilm-cooling option for case 144 was employed in the calculation. In Figure 16 the distribution of the computed heat transfer coefficient is depicted for both film-cooling and nonfilm-cooling options.

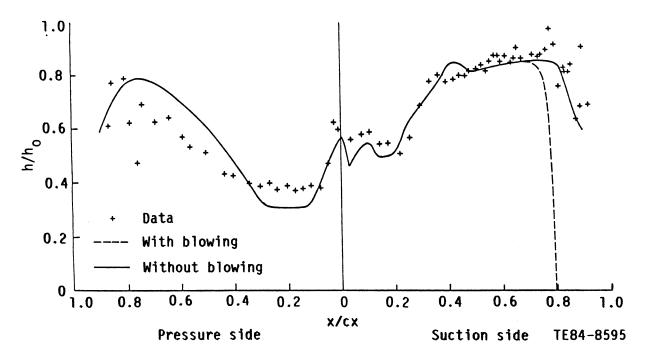


Figure 16. The effect of film cooling on heat transfer coefficient distributions.

The symbol + in the figure indicates the experimental data for the nonfilmcooling case. As can be seen in Figure 16, the heat transfer rate drops to nearly zero from the onset of the injection to the trailing edge. This behavior is a consequence of the buffer region of constant temperature cool gas, which protects the blade surface from the hotter fluid in the cascade passage. The comparison of the pressure distribution for both film-cooling and nonfilmcooling options is shown in Figure 17. The effect of transpiration on the pressure distribution is evident. The adverse pressure gradient that is generated, the resulting upstream influence, and the subsequent favorable pressure gradient that follows it can also be seen in this figure. Temperature, pressure coefficient, and Mach number contours are given in Figures 18 through 20. The effects of the film-cooling are evident.

CASE 3--3-D C3X RECTILINEAR TURBINE CASCADE

The final case considered was a 3-D demonstration calculation assuming laminar flow. The configuration consisted of a C3X cascade situated in the azimuthalradial plane, and bounded in the transverse direction by an endwall and a symmetry plane. The three-dimensionality was introduced by stacking similar planes parallel to each other in the direction normal to a fixed endwall (see Figure 6). For the calculation, a grid consisting of 100 x 25 x 15 grid points in the pseudoazimuthal, pseudoradial, and transverse directions, respectively, was constructed. The height of the blade above the endwall (to the symmetry plane, midspan) was set to be one axial chord, while the inlet boundary layer thickness was 20% of that value.

The calculation was initiated with an initial condition that consisted of a 2-D solution with a simple boundary layer correction applied in the vicinity of the endwall. The corresponding 2-D solution was obtained with 100 x 25 grid points, the inlet Mach number, Ma_1 , was 0.15, the inlet Reynolds number based on inlet free-stream and time chord, Re_1 , was 730, and the ratio of inlet total to downstream exit static pressure, P_t/P_{exit} , was 1.95. Total temperature was assumed to be constant. With this initial condition, a converged solution was obtained in less than 60 time steps.

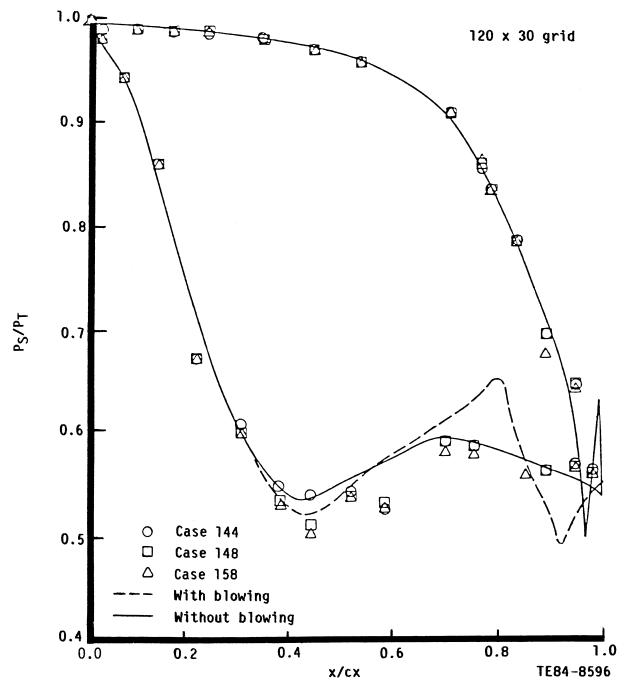
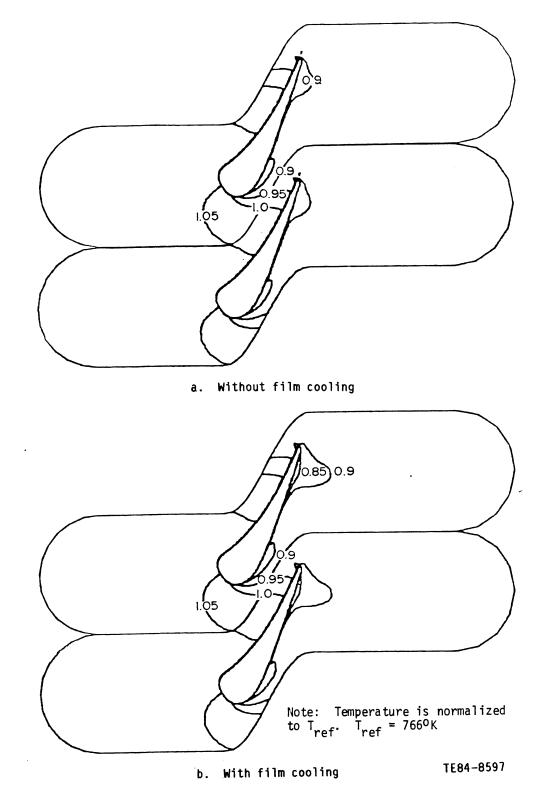



Figure 17. The effect of film cooling on pressure coefficient distributions.





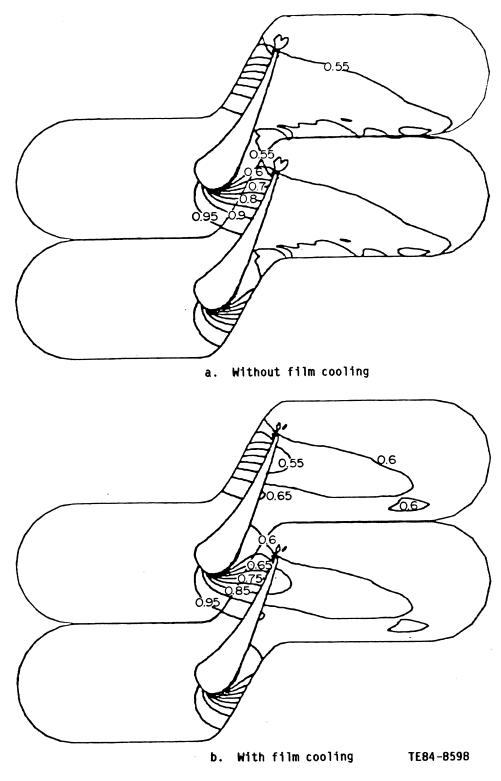


Figure 19. Pressure contours.

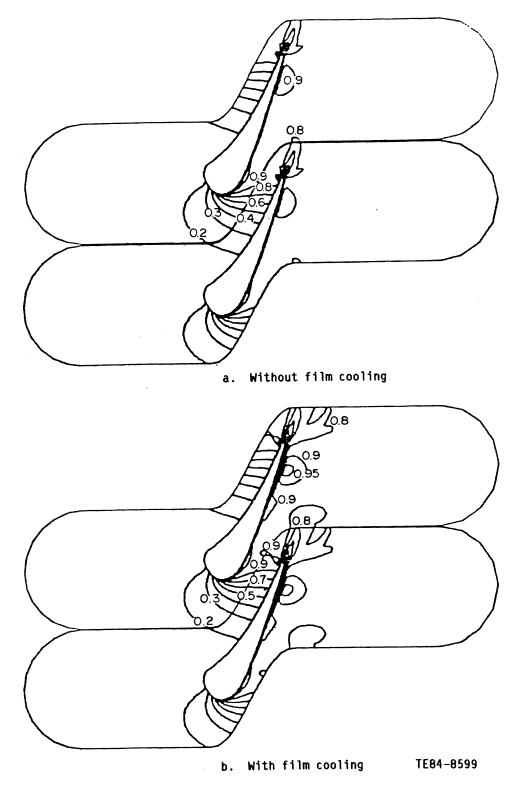


Figure 20. Mach number contours.

The computed pressure distributions at different heights above the endwall are shown in Figure 21. The pressure side is minimally affected by the endwall, remaining at or near the 2-D value run on the same spanwise cross-sectional grid, while the suction side, which shows as much as a 15% change over the 2-D value near the 30% axial chord location, approaches the 2-D value at 26% span above the endwall. Near the endwall, the suction side of the blade is lightly loaded compared with the value of the midspan. These differences from the 2-D value are due to the effects of secondary flow generated by horseshoe and passage vortices. The results are consistent with the expected physics (Ref 6 and 40 through 43) though different geometry is considered in this effort. Figures 22, 23, and 24 show the static pressure contours at endwall, 3.5% span, and midspan plane, respectively. The effect of endwall on the pressure distribution is clear. In Figures 25, 26, and 27, the velocity vector plots are presented for the forward portion of the C3X cascade at three different planes above the endwall. Near the endwall (within 2.95% spanwise plane) a saddle point exists as indicated in the figures. This saddle point moves toward the leading edge and disappears beyond the 2.95% spanwise plane. A stagnation point forms on the nose of the blade surface beyond the 2.95% spanwise plane. These features are consistent with those expected.


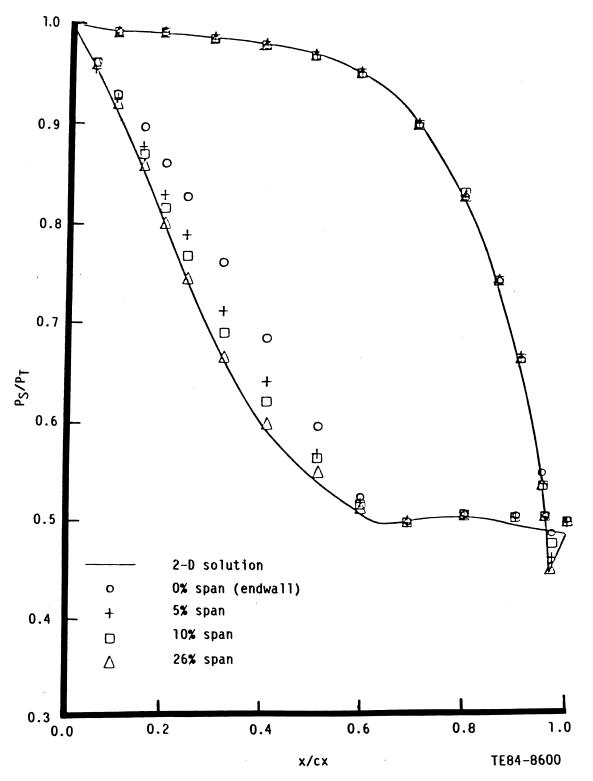


Figure 21. Three-dimensional rectilinear pressure coefficient distribution of the C3X cascade.

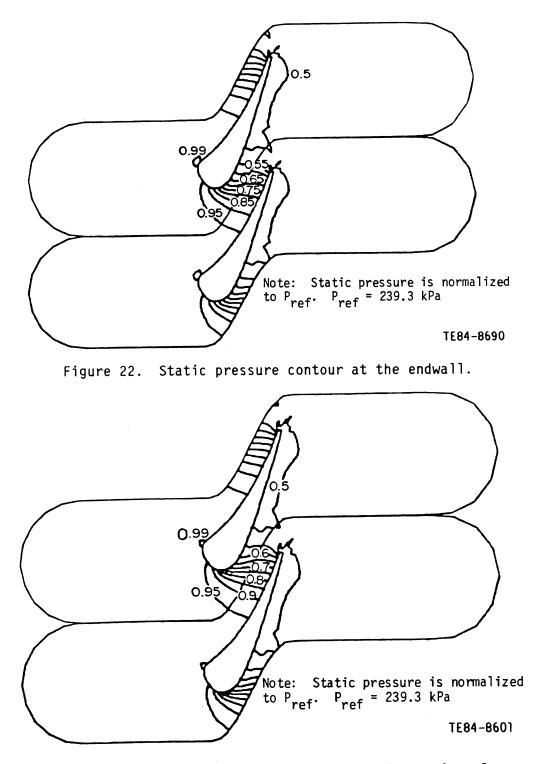

1

• •

Figure 23. Static pressure contour at the 3.5% spanwise plane.

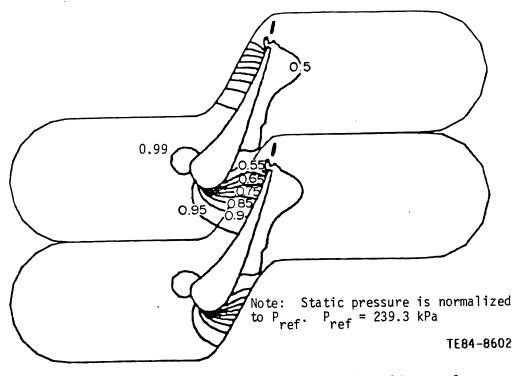
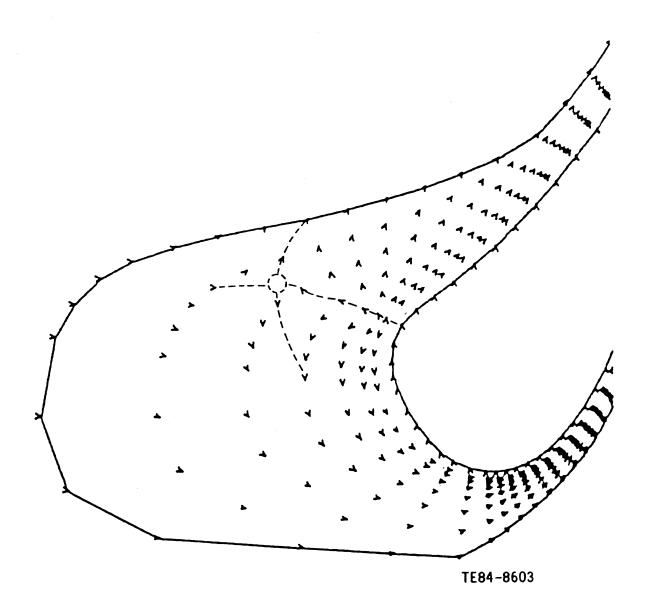



Figure 24. Static pressure contour at the midspan plane.





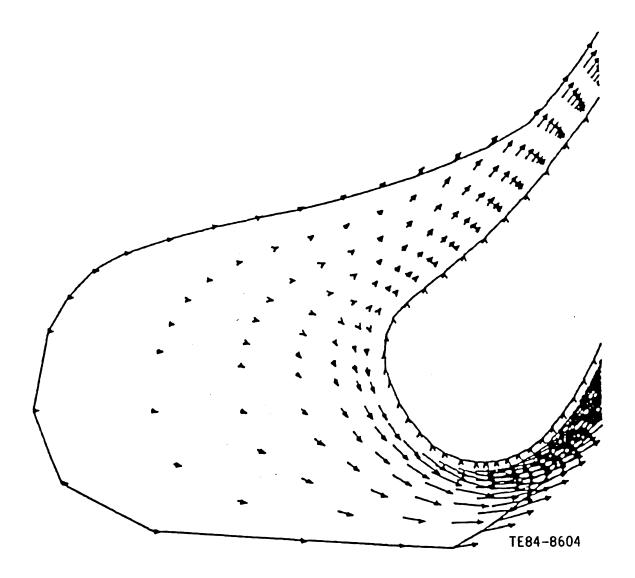


Figure 26. Leading edge vector plot at the 2.95% spanwise plane.

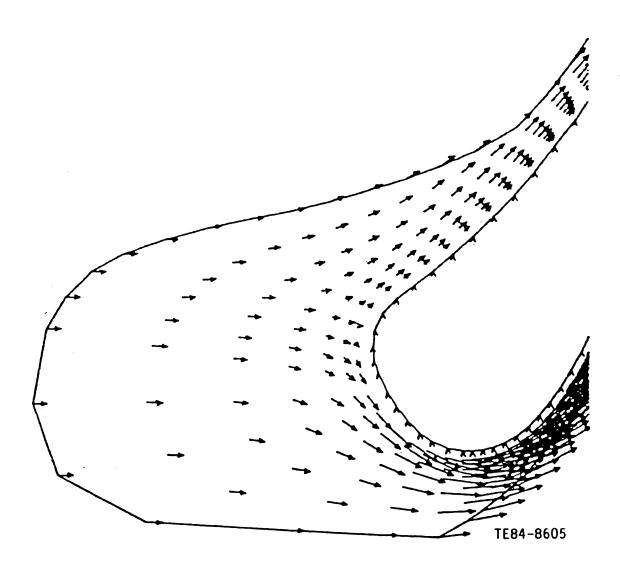


Figure 27. Leading edge vector plot at the midspan plane.

V. CONCLUSIONS

The work described in this report has focused on the application of the timedependent ensemble-averaged Navier-Stokes (N-S) equations to transonic turbine cascade flow fields. In particular, efforts have focused on an assessment of the procedure in conjunction with a suitable turbulence model to calculate steady turbine flow fields using an O-type coordinate system. Three cascade configurations have been considered: the two-dimensional (2-D) turbine cascade of Turner (Ref 21), the 2-D C3X turbine cascade of Hylton et al (Ref 22), and the three-dimensional (3-D) C3X rectilinear turbine cascade. The calculations were carried out in nonorthogonal body-fitted coordinate systems, while grid points were orthogonal near the body surface where viscous flow gradients were suitably resolved. A stagnation pressure inflow/static pressure outflow boundary condition was employed together with no-slip on the solid surfaces. In general, converged solutions were obtained within 80-150 time steps. For example, it took 80 time steps to reach a steady-state solution for a 2-D laminar Turner turbine cascade flow on a 100 x 30 computational grid starting with a uniform velocity (except for a near wall no-slip correction) and a uniform pressure field. The solution was obtained in approximately 570 sec central processing unit (CPU) time of the unvectorized CRAY-1 system. However, the code used to implement the algorithm is still a research code with a large amount of overhead computation. Recent effort on the code speed-up (Ref 9 and 44) shows the run time can be reduced by 50% with code restructuring. In addition, code vectorization is expected to decrease run time by at least a factor of five, leading to a 2-D solution in less than 1 min CPU time.

Comparisons were made between the predicted and measured surface pressure and heat transfer distributions wherever available. In general, the pressure predictions were in good agreement with the data. The computed heat transfer results also showed good agreement with the data when an empirical transition model was used, although further work in the development of laminar-turbulent transitional models is indicated. The calculations showed most of the known features associated with turbine cascade flow fields. The flow turning, leading edge stagnation region, boundary layer development, wake development, filmcooling effects, and 3-D boundary layer separation were all clearly observed. These results indicate the ability of the present N-S analysis to predict the

surface pressure distribution, heat transfer rates, viscous flow development for practical turbine cascades operating at realistic flow conditions in reasonable amounts of computation time with a suitable turbulence model, and plausible boundary conditions.

APPENDIX A

SOLUTION PROCEDURE

The solution procedure method employs a consistently-split linearized block implicit (LBI) algorithm, which has been discussed in detail in Ref 13 and 34. There are two important elements of this method:

- o the use of a noniterative formal time linearization to produce a fullycoupled linear multidimensional scheme that is written in block implicit form
- o solution of this linearized coupled scheme using a consistent "splitting" [alternating direction implicit (ADI) scheme] patterned after the Douglas-Gunn (Ref 35) treatment of scalar ADI schemes.

The solution procedure method is referred to as a split LBI scheme. The method has the following attributes:

- o The noniterative linearization is efficient.
- o The fully-coupled linearized algorithm eliminates instabilities and/or extremely slow convergence rates often attributed to methods that employ ad hoc decoupling and linearization assumptions to identify nonlinear coefficients that are then treated by lag and update techniques.
- o The splitting or ADI technique produces an efficient algorithm that is stable for large time steps and also provides a means for convergence acceleration for further efficiency in computing steady solutions.
- o Intermediate steps of the splitting are consistent with the governing equations, and this means that the physical boundary conditions can be used for the intermediate solutions. Other splittings that are inconsistent can have difficulty in satisfying physical boundary conditions (Ref 34).
- o The convergence rate and overall efficiency of the algorithm are much less sensitive to mesh refinement and redistribution than algorithms based on

explicit schemes or that employ ad hoc decoupling and linearization assumptions. This is important for accuracy and for computing turbulent flows with viscous sublayer resolution.

o The solution procedure method is general and is specifically designed for the complex systems of equations that govern multiscale viscous flow in complicated geometries.

The LBI algorithm was later considered by Beam and Warming (Ref 45), but the ADI splitting was derived by approximate factorization instead of the Douglas-Gunn procedure. Beam and Warming refer to the algorithm as a delta form approximate factorization scheme. This scheme replaced an earlier nondelta form scheme (Ref 46), which has inconsistent intermediate steps.

SPATIAL DIFFERENCING AND ARTIFICIAL DISSIPATION

The spatial differencing procedures are a straightforward adaption of those used in Ref 13 and elsewhere. Three-point central difference formulas are used for spatial derivatives, including the first-derivative convection and pressure gradient terms. This has an advantage over one-sided formulas in flow calculations subject to two-point boundary conditions (virtually all viscous or subsonic flows) in that all boundary conditions enter the algorithm implicitly. In practical flow calculations, artificial dissipation is usually needed and is added to control high-frequency numerical oscillations that otherwise occur with the central-difference formula.

In the present investigation, artificial (anisotropic) dissipation terms of the form

$$\sum_{j}^{\Sigma} d_{j} \left(\frac{a_{j} j}{a_{j}} \right)^{2} \frac{a^{2} u_{k}}{a_{j} z^{2}}$$
(40)

are added to the right-hand side of each (k-th) component of the momentum equation, where for each coordinate direction x_j , the artificial diffusivity d_j is positive and is chosen as the larger of zero and the local quantity $\mu_e~(\sigma Re_{\Delta x}-1)/Re.$ Here, the local cell Reynolds number $Re_{\Delta xj}$ for the j-th direction is defined by

$$\operatorname{Re}_{\Delta x_{j}} = \operatorname{Re} \left| \rho u_{j} \right| \Delta x_{j} / \mu_{e}$$
(41)

This treatment lowers the formal accuracy to O (Δx), but the functional form is such that accuracy in representing physical shear stresses in thin shear layers with small normal velocity is not seriously degraded. This latter property follows from the anisotropic form of the dissipation and the combination of both small normal velocity and small grid spacing in thin shear layers.

SPLIT LBI ALGORITHM

Linearization and Time Differencing

The system of governing equations to be solved consists of either three or four equations: continuity and two components of momentum equation in three dependent variables, ρ , u, v, and w, or continuity and three components of momentum equation in four dependent variables, ρ , u, v, and w. Using notation similar to that in Ref 13, at a single grid point this system of governing equations can be written in the following form:

$$\partial H(\phi)/\partial t = D(\phi) + S(\phi)$$
 (42)

where ϕ is the column-vector of dependent variables, H and S are column-vector algebraic functions of ϕ , and D is a column vector whose elements are the spatial differential operators that generate all spatial derivatives appearing in the governing equation associated with each element.

The solution procedure is based on the following two-level implicit time-difference approximations of Equation (42):

$$(H^{n+1} - H^n)/\Delta t = \beta(D^{n+1} + S^{n+1}) \quad (1-\beta) \quad (D^n + S^n)$$
(43)

where, for example, H^{n+1} denotes $H(\phi^{n+1})$ and $\Delta t = t^{n+1} - t^n$. The parameter β (0.5 $\leq \beta \leq 1$) permits a variable time-centering of the scheme, with a truncation error of order [Δt^2 , ($\beta - 1/2$) Δt].

A local time linearization (Taylor expansion about ϕ^n) of requisite formal accuracy is introduced, and this serves to define a linear differential operator L (Ref 13) such that

$$D^{n+1} = D^{n} + L^{n}(\phi^{n+1} - \phi^{n}) + O(\Delta t^{2})$$
(44)

Similarly,

$$H^{n+1} = H^{n} + (\partial H/\partial \phi)^{n} (\phi^{n+1} - \phi^{n}) + 0 (\Delta t^{2})$$
(45)

$$S^{n+1} = S^{n} + (\partial S/\partial \phi)^{n} (\phi^{n+1} - \phi^{n}) + 0 (\Delta t^{2})$$
(46)

Equations (44 through 46) are inserted into Equation (43) to obtain the following system, which is linear in ϕ^{n+1}

$$(A - \beta \Delta t L^{n}) (\phi^{n+1} - \phi^{n}) = \Delta t (D^{n} + S^{n})$$
(47)

and is termed an LBI scheme. Here, A denotes a matrix defined by

$$A \equiv (\partial H/\partial \phi)^{n} - \beta \Delta t (\partial S/\partial \phi)^{n}$$
(48)

Equation (47) has 0 (Δ t) accuracy unless H = ϕ , in which case the accuracy is the same as Equation (43).

Special Treatment of Diffusive Terms

The time differencing of diffusive terms is modified to accommodate crossderivative terms and also turbulent viscosity and artificial dissipation coefficients that depend on the solution variables. Although formal linearization of the convection and pressure gradient terms and the resulting implicit coupling of variables is critical to the stability and rapid convergence of the algorithm, it does not appear to be important for the turbulent viscosity and artificial dissipation coefficients. Because the relationship between μ_e and d_j and the mean flow variables is not conveniently linearized, these diffusive coefficients are evaluated explicitly at tⁿ during each time step. Notationally, this is equivalent to neglecting terms proportional to $\partial \mu_e / \partial \phi$ or $\partial d_j / \partial \phi$ in Lⁿ, which are formally present in Equation (44), but retaining all terms proportional to μ_e or d_i in both Lⁿ and Dⁿ.

Extensive experience has shown that this has little, if any, affect on the performance of the algorithm. This treatment also has the added benefit that the turbulence model equations can be decoupled from the system of mean flow equations by an appropriate matrix partitioning (Ref 34) and solved separately in each step of the ADI solution procedure. This reduces the block size of the block tridiagonal systems that must be solved in each step and reduces the computational labor.

In addition, the viscous terms in the present formulation include a number of spatial cross-derivative terms. Although it is possible to treat cross-derivative terms implicity within the ADI treatment that follows, it is not convenient to do so; and consequently, all cross-derivative terms are evaluated explicitly at t^n . For a scalar model equation representing combined convection and diffusion, it has been shown by Beam and Warming (Ref 47) that the explicitly treatment of cross-derivative terms does not degrade the unconditional stability of the present algorithm. To preserve notational simplicity, it is understood that all cross-derivative terms appearing in L^n are neglected but are retained in D^n . Neglecting terms in L^n has no effect on steady solutions of Equation (47), because $\phi^{n+1} - \phi^n = 0$, and thus Equation (47) reduces to the steady form of the equations: $D^n + S^n = 0$. Aside from stability considerations, the only effort of neglecting terms in L^n is to introduce an 0 (Δt) truncation error.

Consistent Splitting of the LBI Scheme

To obtain an efficient algorithm, the linearized system Equation (47) is split using ADI techniques. To obtain the split scheme, the multidimensional operator L is rewritten as the sum of three one-dimensional (1-D) suboperators L_1 (i = 1, 2, 3) each of which contains all terms having derivatives with respect to the i-th coordinate. The split form of Equation (47) can be derived either as in Ref 13 and 34 by following the procedure described by Douglas and Gunn (Ref 35) in their generalization and unification of scalar ADI schemes, or using approximate factorization. For this system of equations, the split algorithm is given by

$$(\mathbf{A} - \beta \Delta t \mathbf{L}_{1}^{n}) \ (\phi^{\star} - \phi^{n}) = \Delta t \ (\mathbf{D}^{n} + \mathbf{S}^{n})$$
(49a)

$$(A - \beta \Delta t L_2^n) (\phi^{\star \star} - \phi^n) = A (\phi^{\star} - \phi^n)$$
(49b)

$$(A - \beta \Delta t L_3^n) (\phi^{n+1} - \phi^n) = A (\phi^{\star \star} - \phi^n)$$
(49c)

where ϕ^* and ϕ^{**} are consistent intermediate solutions. If spatial derivatives appearing in L_i and D are replaced by three-point difference formulas, as indicated previously, then each step in Equation (49) can be solved by a block-tridiagonal elimination.

Combining Equations (49a-c) gives

$$(A - \beta \Delta t L_1^n) A^{-1} (A - \beta \Delta t L_2^n) A^{-1} (A - \beta \Delta t L_3^n) (\phi^{n+1} - \phi^n) = \Delta t (D^n + S^n) (50)$$

which approximates the unsplit scheme Equation (47) to 0 (Δt^2). Because the intermediate steps are also consistent approximations for Equation (47), physical boundary conditions can be used for ϕ^* and ϕ^{**} (Ref 13 and 34). Finally, since the suboperators L_i are homogeneous operators, it follows from Equations (49a-c) that steady solutions have the property of $\phi^{n+1} = \phi^* = \phi^{**}$ $= \phi^n$ and satisfy

$$\mathbf{D}^{\mathbf{n}} + \mathbf{S}^{\mathbf{n}} = \mathbf{0} \tag{51}$$

The steady solution depends only on the spatial difference approximations used for Equation (51) and does not depend on the solution algorithm itself.

•

APPENDIX B

USER'S MANUAL

The user's manual that follows describes two separate computer codes that are used to obtain solutions for cascade flow problems. A nonorthogonal coordinate system is generated through COORD so that the physical boundaries and periodic boundaries coincide with coordinate surfaces. The output from COORD consists of results printed in the output file and results written on a temporary file. This latter set of results must be saved and used as input for the second program, MINT.

Figure 28 shows the overall program flow of COORD. Table I describes the COORD namelist input. The MINT code combines a block data program (BLKDAT) containing pertinent data statements, a main program (DAL) and a series of subroutines to perform the required calculations. Figure 29 shows the overall program flow, Figure 30 illustrates the input and initialization procedures. Table II describes the MINT namelist input, and Table III lists the major FORTRAN variables in MINT. Figure 31 provides a global description of execution control. These program flow charts only provide a means of guidance for interested users wishing to consult the program listing.

SAMPLE INPUT CARDS AND PRINTED OUTPUT

A sample two-dimensional (2-D) case was run to illustrate the set up of input paramaters and typical printouts of the COORD program and MINT code, respectively. Table IV lists sample inputs for COORD. For the program, all parameters in the namelist input &INPT and &DATA1 must be specified. Two sequential &DATA1 are required in the namelist input. The first set is used for the parameterization of the inner loop and the second set is used for that of the outer loop. Sample input for the MINT code is listed in Table V. For the MINT code, the namelist data shown is for a new calculation. In the case of a restarted calculation the input is identical except for the restart flag IREST set in &READ1, and the variables NT and DT in &READ9. It is not advisable to change any other values on a restart.

In COORD, the code output first prints out the input airfoil coordinate data, as shown in Table VI. These geometry data are followed by the print-out of

the namelist INPT and two sequential DATA1. Finally, the grid coordinates' associated metric data, coordinate intersection angles, and Jacobian are printed out. The grid coordinates are written by means of a binary write on TAPE9 and must be saved for input to the MINT code.

In the MINT code, the code output first prints out a series of dimensionless parameters (DIM1-DIM10, DIM12, and DIM14) and the dimensionless, referenced total temperature, total pressure, and total enthalpy as shown in Table VII. This output is followed by the finite difference coefficients for first and second derivatives in both directions. In each direction, three lines are written. The first and third lines give one-sided difference weights at the lower and upper boundaries; the second line of each set gives central differences used for the interior points. Six numbers are written on each line; the first set of three values represents the first derivate coefficients and the second set of three values represents the second derivative coefficients.

The next output item is the namelist data &READ1 and &READ9. The values of some parameters may be changed by the internal operations. The following items are the print-outs of the local surface static pressure, boundary layer thickness, and heat transfer coefficients around the blade surface, respectively. The upstream total pressure is also indicated in the print-out. The value of total pressure, PTOTI, will be reached in IDTAB (through namelist input) time steps if the PTOTI is greater than the reference total pressure. A summary print, which gives not only the maximum relative change over a time step by SSTEST but also the location, is written at each time step. The maximum relative changes of each dependent variable are also given. RESMAX is the maximum residual of the equations solved and indicates how well the steady-state equation is being satisfied.

Following the summary data of the final time step of the run, the pressure coefficient and the heat transfer coefficient are written against the blade surface coordinates. The distribution of the heat transfer coefficient along the blade surface is zero for the case of IHSTAG=2 (i.e. constant stagnation enthalpy option). Finally, a complete flow field print-out is produced.

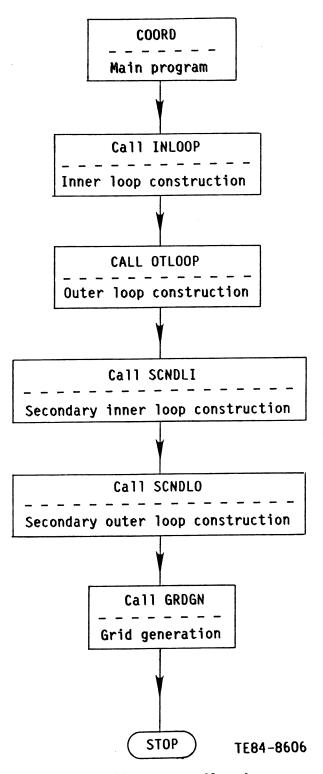


Figure 28. The overall program flow for program COORD.

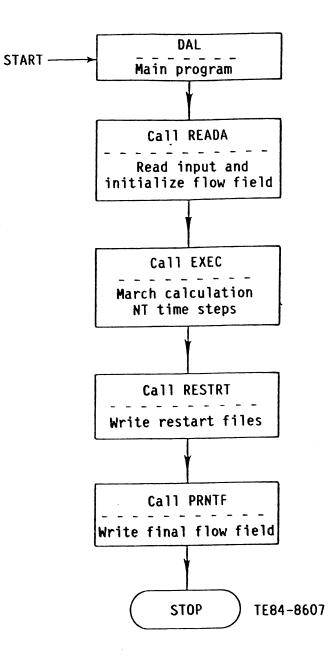


Figure 29. The overall program flow for program DAL.

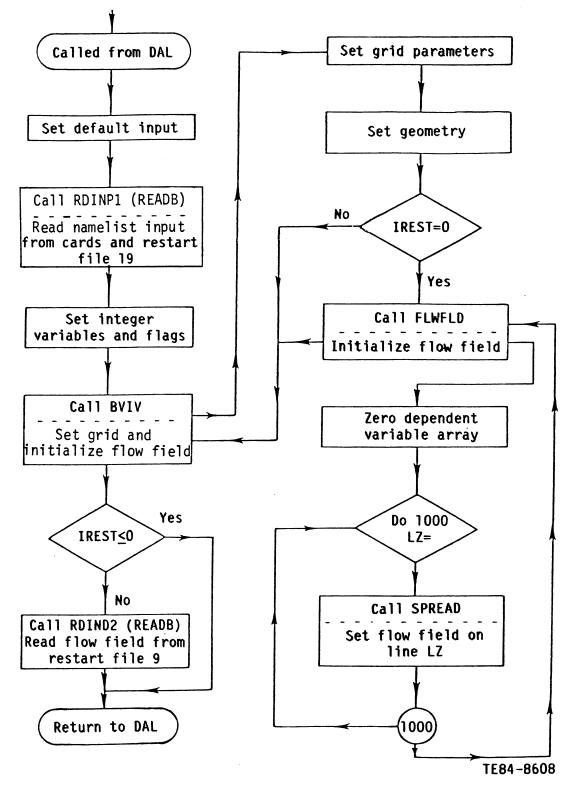


Figure 30. The program flow chart for subroutine READA.

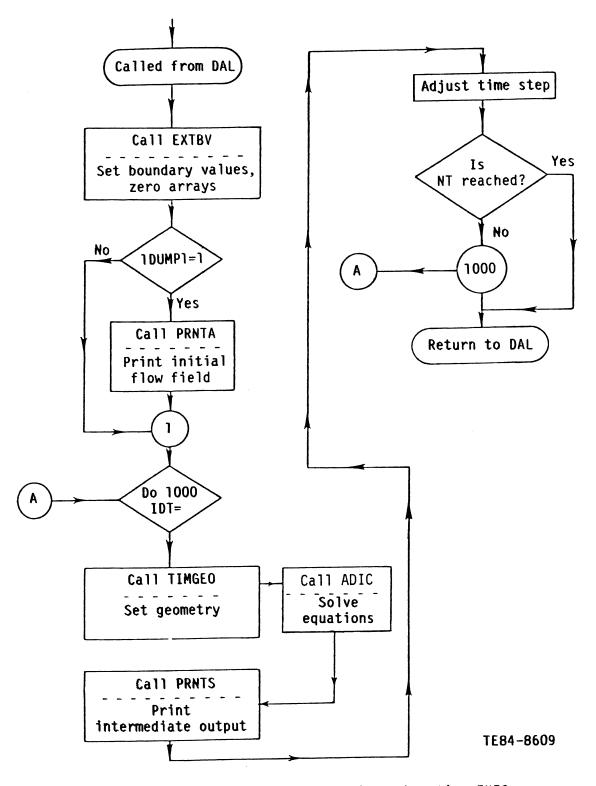


Figure 31. The program flow chart for subroutine EXEC.

Table I. <u>COORD namelist input description.</u>

Namelist or <u>variable name</u>	Description
<u>&INPT</u>	
NRAD	number of pseudoradial points
NTHETA	number of pseudoazimuthal points
RMAXO	cascade passage spacing/2
RMAX1	normal distance between blade surface and inner-second- ary loop
RMAX2	normal distance between outer loop and outer-secondary loop
DAMP	damping parameter in pseudoradial direction
NE	number of airfoil input data points
LED	airfoil data point number at airfoil leading edge
DMX(I)	array for x-location of airfoil input data points
DMY(I)	array for y-location of airfoil input data points
XM2, XM3 YM2, YM3	input outer loop location (see Figure 32)
EXTF, EXTR	extension of periodic line (see Figure 32)
&DATA1	
NCLUST	total number of the interior cluster points [A cluster point is the sequential number of the selected grid point that must coincide with a particular predetermined value of the z-coordinate. Accordingly, pairs of (1, YFIRST) and (NUMDZ+2, YLAST) are also cluster points, but they are boundary cluster points.]
CLPY(I), I = 1 - 60	the z-coordinate of the cluster point (Both boundary and internal cluster points must be specified.)
CLPX(I), I = 1 - 60	the sequential number of the grid point corresponding to CLPY(I)
ETAP(J), I = 1 - 60	the sequential number of the grid point defined as the pivot point (The grid spacing will have the fastest variation at a pivot point. For each of the interior cluster points there will be a pair of pivot points: one ahead of the cluster point, the other after the

Namelist or <u>variable name</u>	Description
	cluster point. However, only one pivot point will be associated with each of the boundary cluster points.)
ALPH(J), I = 1 - 60	width parameter specifying width (in terms of the number of grid points) in which 90% of the grid size variation takes place around the pivot point ETAP(J)
> 0	decreasing grid size
< 0	increasing grid size
NEND = 0 = 1 = 2 = 3	no stretching at YFIRST and YLAST stretching at YFIRST only stretching at YLAST only stretching at YFIRST and YLAST
RHO (always > 0.0)	approximate ratio of the grid size at CLPY(2) to the maximum grid size in the interval CLPY(1) < Z < CLPY(2)
= 1.0	no stretching at YFIRST (used with NEND = 0 or 2)
RATIO(K), K = 1 - 40 (always > 0.0)	approximate ratio of the grid size at CLPY(K+1) to the maximum grid size in the interval CLPY(K) < Z < CLPY(K+1)
= 1.0	no grid variation at CLPY(K+1)
BETAO (always > 0.0)	calculated (It indicates the first derivative of the z-coordinate with respect to the computational coordinate at YFIRST.)
BETA(L), L = 1 - 60 (always > 0.0)	calculated [It indicates the ratio between the grid sizes on both sides of the pivot point ETAP(L+1).]

Notes:

The airfoil x-y data points DMX and DMY must be input in order around the airfoil starting from any arbitrary location on the airfoil. The computer code then nondimensionalizes the coordinates with respect to the axial chord and places the origin at the location of maximum x (near the trailing edge) with the airfoil oriented as shown in Figure 32. The units of DMX and DMY are arbitrary while RMAXO, RMAX1 and RMAX2 are nondimensional.

After this is done, the grid point numbering is reordered so that the first point terminates in the trailing cap, e.g., line AA' in Figure 2. All pseudoazimuthal grid point locations are referenced to this line AA'. Hence, CLPX and CLPY refer to the grid point locations and the azimuthal parameterized coordinate value, respectively.

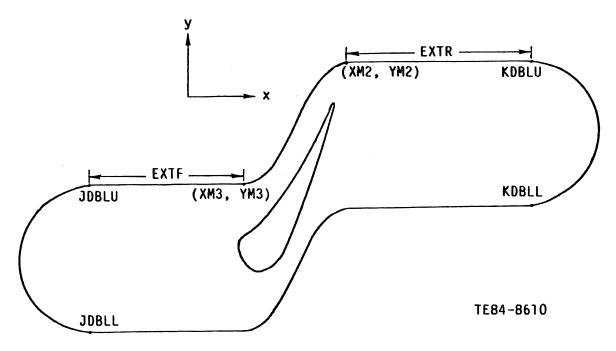


Figure 32. Cascade geometry.

Table II. MINT namelist input description.

Namelist or <u>variable name</u>	Description
&READ1	
IREST = 0	A new calculation is being started.
=]	The case is being run from the restart files.
IOTAPE = 10	output unit number for the dependent variable array restart data
INTAPE = 9	input unit number for the dependent variable array restart data
IOTAP1 = 20	output unit number for the namelist restart data
INTAP1 = 19	input unit number for the namelist restart data
&READ9	
NUMDX	number of interior grid points in the pseudoazimuthal direction (x or y ^l direction); total number of points in this direction = NUMDX + 2, NUMDX <u><</u> 128
NUMDY	number of interior grid points in the spanwise direction (3D only)
NUMDZ	number of interior grid points in the pseudoradial direction (z or y ³ direction); total number of points in this direction = NUMDZ + 2, NUMDZ <u><</u> 28
TWOD = T	logical variable for 2-D calculation
= F	logical variable for 3-D calculation
CLENG	reference lengthm
WREF	reference velocitym/sec
DENSR	reference densitykg/m ³
TREF	reference temperature°K
VISCR	reference dynamic viscositykg/m sec
AVISC(IDIR,IEQ)	artificial dissipation parameter σ IEQ = 1-5 and IDIR = 1-3 IEQ = 1 indicates the x-momentum equation. IEQ = 2 indicates the y-momentum equation. IEQ = 3 indicates the z-momentum equation. IEQ = 4 indicates the continuity equation.

Namelist or <u>variable name</u>

<u>Description</u>

	<pre>IEQ = 5 indicates the energy equation. IEQ = 16 indicates the turbulent kinetic energy. IEQ = 17 indicates the turbulent dissipation energy rate. IDIR = 1 indicates the x second derivative term. IDIR = 2 indicates the y second derivative term. IDIR = 3 indicates the z second derivative term.</pre>
	For example, AVISC(3, 1) is the value of σ used for the artificial dissipation term $\partial^2 U/\partial Z^2$ in the x-momentum equation. Even if the y-momentum equation is not solved, the corresponding AVISC must be supplied. Default values are 0.0; recommended values are 0.50 initially, followed by runs at 0.2.
NT	number of time steps to be run
DT	initial nondimensional time step (If DT is omitted on a restart, DT will be set to the value it was at the termination of the last run.)
DTMIN	minimum nondimensional time step for this run
DTMAX	maximum nondimensional time step for this run
ITEST	Steady-state test is performed every ITEST time steps. (Default value is 1.)
IPRINT	Complete flow field print-outs are provided every IPRINT time steps.
IVARPR(IV)	optional print control flag for variable IV
= 0	suppress print-out of variable IV
= 1	normal print-out of variable IV
	IV IVARPR(IV) 1 transverse velocity, u 2 spanwise velocity, v 3 streamwise velocity, w 4 density, ρ 5 enthalpy, h 16 turbulent kinetic energy, k 17 turbulent dissipation rate, ε 26 pressure, P 27 temperature, T 28 effective viscosity, μeff 33 mixing length, %

Namelist or <u>variable name</u>	Description
	35 Mach number, Ma 36 total pressure, P _T
IDUMP1 = 1	print initial flow field for this run
= 2	no initial print-out
IPLOT	
= 0	no plot file (TAPEl) written
> 0	plot file written at time step increment IPLOT
JDBLU	point number at the end of the periodic line in the leading edge of the cascade (see Figure 32) referenced to the grid point corresponding to line AA' in Figure 2
JDBLL	point number at the end of the periodic line in the leading edge of the cascade (see Figure 32) referenced to the grid point corresponding to line AA' in Figure 2
KDBLU	point number at the end of the periodic line in the trailing edge of the cascade (see Figure 32) referenced to the grid point corresponding to line AA' in Figure 2
KDBLL	point number at the end of the periodic line in the trailing edge of the cascade (see Figure 32) referenced to the grid point corresponding to line AA' in Figure 2
IHSTAG	
= 0	static enthalpy option
= 2	constant stagnation enthalpy option
FLWNG	exit flow angle used for defining the wake region and boundary extrapolation, referenced to streamwise axis, x, as shown in Figure 32
TGAS	total temperature of the incoming gas at the inlet

Namelist <u>variable</u>		Description
TWALLI		surface temperature distribution along the blade surface (nondimensional), referenced to pseudoazimuthal grid point location around body
IBLOW		
	= 0	without film-cooling option
	= 1	with film-cooling option
BLOU		U velocity component of the blowing velocity profile for the film-cooling option (nondimensional), referenced to pseudoazimuthal grid point location around body
BLOW		W velocity component of the blowing velocity profile for the film-cooling option (nondimensional), referenced to pseudoazimuthal grid point location around body
PTOTI		total pressure at the inlet of the cascade flow field (nondimensional)
IVISC		index for turbulent modeling
	= 1	laminar flow constant viscosity
	= 2	laminar flow Sutherland's law
	= 3	mixing length model
	= 4	k-l one-equation model
	= 5	k-€ two-equation model
IDTA		the time step number at which the inlet total pressure begins to be increased linearly (default IDTA = 0)
IDTAB		The number of time steps used to increase inlet total pressure up to PTOTI begins at IDTA (default IDTAB = 10).

Notes:

The nondimensional time is defined as CLENG/WREF. The recommended values of the time steps can be obtained from the sample run in this User's Manual.

Table III. List of major FORTRAN variables in MINT.

FORTRAN symbol	Common <u>block</u>	Description
AC(I,J,K)	BLK1	dependent variable array
ACG(J,J)	BLK1	geometry data array
AN(I,J)	BLKM	array storing time term linearized coefficients
APR(I,J)	PRNT	print output array
AVANDR	TURB	damping constant
AVISC(I,J)	MISC2	artificial dissipation parameter
C(I,J,K)	BLKM	coupled matrix array storage
CLENG	CREF	reference length
CMACH	MISC2	reference Mach number
D	VARNO	index for divergence
D1(I,J,K)	BLKM	array storing first sweep linearized coefficients
D2(I,J,K)	BLKM	array storing second sweep linearized coefficients
D3(I,J,K)	BLKM	array storing third sweep linearized coefficients
DENSR	CREF	reference density
DFW(I,J,K)	AD17	difference weight array
IMI	NOND	inverse Reynolds number
DIM2	NOND	reference pressure/reference dynamic head
DIM3	NOND	reference pressure/(reference density x reference enthalpy)
DIM4	NOND	1.0/(Rey x P _r)
DIM12	NOND	2.0 x DIM1
DS	VARNO	index for dissipation
DT	MISC2	time step

FORTRAN <u>symbol</u>	Common block	Description
DTCON	MISC2	inverse step
DTMAX	MISC2	maximum allowable time step
DTMIN	MISC2	minimum allowable time step
E(I,J,K)	BLKM	coupled matrix array storage
GRID(I)	GTRAN	grid distribution parameter
Н	VARNO	index for enthalpy
Il	MGAUS	lower limit for matrix inversion
IADI	ADII	ADI sweep number
IBC	ADI1	boundary condition boundary parameter
IDT	MISC2	time step index
IDTADJ	MISC2	time step control parameter
IDUPMI	OUTA	parameter controlling initial station print (see &READ9)
IEQ	ADI1	equation number
IGPRT(I)	GEOI	geometry print control
IL	MGAUS	upper limit for matrix inversion
IPRINT	MISC2	print interval parameter (see &READ9)
IRERUN	MISC2	restart write control parameter
IREST	MISC2	restart read control parameter (see &READ1)
IVARPR(I)	MISC2	print parameter (see &READ9)
JADI	ADII	ADI sweep parameter
JEQBC(I,J,K)	ADI1	boundary condition type parameter
ЈХ	ADI2	direction 1 grid point index
κz	ADI2	direction 3 grid point index
LX	ADI2	direction l grid point index

FORTRAN symbol	Common block	Description
LX1	ADI3	first direction 1 interior point
LX2	ADI3	last direction 1 interior point
LY	ADI2	direction 2 grid point index
LYI	ADI3	first direction 2 interior point
LY2	ADI3	last direction 2 interior point
LZ	ADI2	direction 3 grid point index
LZI	ADI3	first direction 3 interior point
LZ2	ADI3	last direction 3 interior point
LZPRNT	MISC2	3-D print control
MEQS	ADI1	number of equations to be solved
NT	MISC2	number of time steps to be run
NUMDX	MISC2	number of interior direction 1 points
NUMDY	MISC2	number of interior direction 2 points
NUMDZ	MISC2	number of interior direction 3 points
NX1	ADI4	first grid pointdirection l
NX2	ADI4	last grid pointdirection l
NYI	ADI4	first grid pointdirection 2
NY2	ADI4	last grid pointdirection 2
NZI	ADI4	first grid pointdirection 3
NZ2	ADI4	last grid pointdirection 3
Р	VARNO	index for pressure
PCNTI	MISC2	time step control parameter
PCNT2	MISC2	time step control parameter
PREF	CREF	reference pressure
PRNDL	CREF	Prandtl number

FORTRAN symbol	Common <u>block</u>	Description
РТОТ	BCCON	total pressure
R	VARNO	index for density
REY	CREF	Reynolds number
SN(I)	BLKM	array storing source term linearized coefficient
SSTEST	MISC2	maximum change in variable across the time step
т	VARNO	index for temperature
TAUW	TURB	wall shear
TREF	CREF	reference temperature
TTIME	MISC2	cumulative time
ттот	BCCON	total temperature
U	VARNO	index for direction 1 velocity
USTAR	TURB	dimensionless velocity
V	VARNO	index for direction 2 velocity
VISCL	TURB	laminar reference viscosity
VISCR	CREF	reference viscosity
VS	VARNO	index for viscosity
W	VARNO	index for direction 3 velocity
WREF	CREF	reference velocity
XGMAX(I)	GRID1	maximum coordinate value
XGMIN(I)	GRID1	minimum coordinate value
XPLUS	TURB	dimensionless distance from surface

Table IV. <u>Sample input for COORD</u>.

```
JOB, JN=CCF2, M=1500, T=9.
ACCOUNT, AC= , PW=
ACCESS, DN=OLDPL, PDN=COORDS1, ID=AESRAI.
ACCESS . DN=OLDBIN . PDN=COORDB1 . ID=AESRAI .
ASSIGN, DN=MSHRUN, A=FT09.
ASSIGN, DN=WRITOT, A=FT08.
LDR . DN=OLDBIN . MAP=PART . NA .
SAVE, DN=MSHRUN, PDN=C3X02, ID=AESRAI.
/EOF
  & INPT
   DAMP=4.
   RMAX0=.75, RMAX1=.04E0, RMAX2=.08E0.
   NTHETA=101.
   NRAD=5.
EXTR=1.8.
   ĒXTF=1.6,
XM2=1.1,YM2=0.45,XM3=0.1,YM3=-0.8,
   NE=79.LED=33.
  DMX=7.8161, 7.8115, 7.6624, 7.5024, 7.3335, 7.1575, 6.9756, 6.7894, 6.5997, 6.4074,
6.2126, 6.0160, 5.8171, 5.6157, 5.4110, 5.2019, 4.9870, 4.7648, 4.5326, 4.2885,
4.0272, 3.7376, 3.3985, 2.9835, 2.4707, 1.8743, 1.2723, 0.7658, 0.3894, 0.1097,
0.0569, 0.0216, 0.0046, 0.0064, 0.0264, 0.0650, 0.1212, 0.1938, 0.2822, 0.3848,
0.4999, 0.8494, 1.2052, 1.5519, 1.8885, 2.2149, 2.5314, 2.8374, 3.1339, 3.4204,
3.6975, 3.9654, 4.2248, 4.4760, 4.7191, 4.9548, 5.1834, 5.4051, 5.6203, 5.8296,
6.0328, 6.2309, 6.4237, 6.6116, 6.7950, 6.9736, 7.1483, 7.3188, 7.4849, 7.5077,
7.5408, 7.5816, 7.6269, 7.6736, 7.7180, 7.7572, 7.7879, 7.8082, 7.8161,
DMY=-C.0053,0.0412, 0.6391, 1.2357, 1.8301, 2.4221, 3.0122, 3.6015, 4.1897, 4.7767,
5.3632, 5.9487, 6.5336, 7.1176, 7.7003, 8.2814, 8.8605, 9.4369, 10.0094, 10.5766,
11.1364,11.6817,12.1976,12.6538,12.9939,13.1376,13.0233,12.6764,12.1890,11.6548,
1.5171,11.3741,11.2278,11.0802,10.9342,10.7920,10.6556,10.5273,10.4094,10.3035,
10.2116, 9.9578, 9.6815, 9.3932, 9.0935, 8.7826, 8.4615, 8.1308, 7.7909, 7.4430,
   DMX=7.8161, 7.8115, 7.6624, 7.5024, 7.3335, 7.1575, 6.9756, 6.7894, 6.5997, 6.4074,
              10.2116, 9.9578, 9.6815, 9.3932, 9.0935, 8.7826, 8.4615, 8.1308, 7.7909, 7.4430,
7.0874, 6.7249, 6.3564, 5.9817, 5.6020, 5.2177, 4.8290, 4.4364, 4.0401, 3.6406,
3.2380, 2.8329, 2.4254, 2.0155, 1.6035, 1.1895, 0.7737, 0.3559, -0.0617, -0.1026,
-0.1356, -0.1588, -0.1699, -0.1681, -0.1542, -0.1288, -0.0935, -0.0516, -0.0053,
    &END
    &DATA1
    NCLUST=1,NEND=3,IPLOT=0,
    BETA0=1 \cdot E - 3
    RH0=0.1.
    RATI0=0.1.
    CLPX=1.,51.,101.,
    CLPY=0.,0.5,1.,
    ETAP=15.,34.,70.,88.,101.,
     ALPHA = - 25 . , 28 . , - 42 . , 34 . ,
    &END
     &DATA1
     NCLUST=1,NEND=0,BETA0=1.E-3,IPLOT=0,
     ETAP=1..13..38..51..
    ALPHA=1.E-10,30.,-30.,
CLPX=1.,30.,51.,
     CLPY=0.,0.27,0.5,
     RH0=1.E-1.
     RATIO=1.E-1,
     SEND
   /EOF
```

Table V. Sample inputs for MINT code.

```
JOB, JN=SAMPLE, M=2100, T=300.
ACCOUNT, AC=
                  • P W =
ACCESS, DN=OLDPL, PDN=SRAMNTS, ID=AESRAI.
ACCESS • DN=OLDBIN • PDN=SRAMNTB • ID=AESRAI •
ACCESS, DN=GRID, PDN=C3XCORD, ID=AESRAI, ED=2.
ASSIGN, DN=PLOTF, A=FT01.
ASSIGN, DN=RST9, A=FT09.
ASSIGN, DN=RST19, A=FT19.
ASSIGN, DN=RST10, A=FT10.
ASSIGN, DN=RST20, A=FT20.
ASSIGN ON=GRID A=FT21.
LDR, DN=OLDBIN, MAP=PART, NA.
SAVE, DN=RST10, PDN=SAMA1, ID=AESRAI.
SAVE, DN=RST20, PDN=SAMB1, ID=AESRAI.
/EOF
 ******** C3X-OGRID CASCADE 120X30 ************
 ******* TURBULENT FLOW *********
 &READ1
 INTAP1=19, INTAPE=9, IOTAPE=10, IOTAP1=20,
 IREST=0,
 & END
 &READ9
 NUMDX=118, NUMDZ=28,
 JDBLU=55, JDBLL=67, KDBLU=5, KDBLL=117,
 AVISC = 12 \pm 0.5 \pm 3 \pm 0.5 \pm 60 \pm 0.5 \pm 0.5
 IHSTAG=0.
 WREF=300... TREF=766... CLENG=0.07816. VISCR=.3423122E-04. DENSR=1.0972523.
 LAMFLO=0.
 FLWNG=72.38,
 IVARPR(1)=25*1, 1,1,1,6*0,1,
 DTMIN=0.1.ITEST=1000.IVISC=3.
 IDUMP1=2.
 NT=10, IPRINT=10,
 DT=1.,
 DTMAX=5..
 TGAS=811.,
  TWALL1(1)=0.8, 0.805, 0.81, 0.815, 0.816, 0.817, 0.818, 0.819, 0.82, 0.82,
  TWALL1(11)=16+0.82, 0.815, 0.81, 0.805, 0.795,
  TWALL1(31X1)=0.79, 0.777, 0.77, 0.76, 0.75, 0.74, 0.73, 0.72, 0.715, 0.707,
 TWALL1(41)=0.7, 0.697, 0.692, 6*0.69, 0.695,
TWALL1(51)=0.702, 0.717, 0.73, 0.745, 0.755, 3*0.76, 0.762, 0.765,
TWALL1(61)=0.767, 22*0.77, 0.775, 0.777, 0.779, 0.78, 0.782, 9*0.785,
   0.78, 0.778, 0.775.
  TWALL1(101)=0.77,0.765, 0.763, 0.76, 0.755, 0.75, 0.745, 0.74, 0.738, 0.735,
  TWALL1(111)=0.73, 0.735, 0.74, 0.755, 0.76, 0.77, 0.78, 0.785, 0.79, 0.795,
  IBLOW=0,BLOU(111)=8 \pm 0,0766,BLOW(111)=8 \pm 0,0643,
  PTOTI=1.66.
  IDTA=0, IDTAB=40,
  & END
 /EOF
```

	Tat	ole ۱	/I.		
Sample	outputs	for	COORD	program.	

÷.,

AIRFOIL COORDINATES

$\begin{array}{llllllllllllllllllllllllllllllllllll$
--

t

$\begin{array}{c} 0.750770 \pm 0.1\\ 0.754080 \pm 0.1\\ 0.754080 \pm 0.1\\ 0.754080 \pm 0.1\\ 0.767360 \pm 0.1\\ 0.767360 \pm 0.1\\ 0.7767360 \pm 0.1\\ 0.778790 \pm 0.1\\ 0.778790 \pm 0.1\\ 0.778790 \pm 0.1\\ 0.778790 \pm 0.1\\ 0.7780 \pm 0.1\\ 0.780 \pm 0.1\\ 0.740 \pm 0.1\\ 0.750 \pm 0.1$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{llllllllllllllllllllllllllllllllllll$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{llllllllllllllllllllllllllllllllllll$
&DATA1 NCLUST = 2, NE 56+0., CLPX = 1., 51	ND = 3, RETAO = 1.E-3 1., 101., 57*0., CLF 8863439338224E-2, 2.6	Y = 0., 0.5, 1., 57*	0., 88., 101., 55*0., 0., RATIO = 0.1, 39*0., , RHO = 0.1, IPLOT = 0,	ALPHA = -25' 2842 34 BETA = 2.4125682039431E-2. &END
&DATA1 NCLUST = 2 + NE 56+0++ CLPX = 1++ 30	ND = 0, BETAO = 1.E-3 0., 51., 57*0., CLP 14E-2, 2.0313491957014	(= 0 0.27. 0.5. 57	8., 51., 101., 55*0., 4 *0., RATIO = 0.1, 2*0., 2, 57*0., RHO = 1., IPLO	1
		RADIAL MESH POIN	IT = 1	
LOOPWISE MESH POINTS PX	PY GRR	GTT GRT A	NGLE JACOBIAN	
2 0.95464077E+00-0. 3 0.96393475E+00-0. 4 0.97211840E+00-0. 5 0.97929894E+00-0.	17751214E+00 0.431E-05 14401434E+00 0.431E-05 11367917E+00 0.431E-05 36426998E-01 0.431E-05	0.168E+02-0.190E-07 0.9	000E+02 0.851E-02 000E+02 0.851E-02 000E+02 0.851E-02 398E+02 0.851E-02	

.

7 0.99201998E+00-0.40988640E-01 9 0.99769179E0E+00-0.21963894E-01 9 0.99769179E+00 0.86953533E-02 10 0.99769179E+00 0.86953533E-02 11 0.985535E+00 0.20740694E-01 12 0.94230026E+00 0.20740694E-01 13 0.97332040E+00 0.20674288E-01 14 0.96398948E+00 0.16608172E-01 15 0.95708311E+00 0.559293284E-02 17 0.9452862E+00-0.63709406E-01 19 0.93795013E+00-0.63709406E-01 19 0.92921782E+00-0.63709406E-01 20 0.91897071E+00-0.88812679E-01 21 0.90700133E+00-0.11762630E+00 23 0.88733818E+00-0.15041782E+00 24 0.85923440E+00-0.22857840E+00 25 0.83880481E+00-0.37706816E+00 25 0.83880481E+00-0.37706816E+00 27 0.79040253E+00-0.42032587794E+00 28 0.76222866E+00-0.45130588E+00 29 0.73137314E+00-0.888269927E+00 30 0.528116358E+00-0.81841581E+00 31 0.66155524E+00-0.81841581E+00 32 0.62255946E+00-0.81841581E+00 33 0.528116358E+00-0.81841581E+00 34 0.53739768E+00-0.81841581E+00 35 0.49151747E+00-0.81841581E+00 35 0.49151747E+00-0.81841581E+00 35 0.49151747E+00-0.81841581E+00 35 0.49151747E+00-0.81841581E+00 36 0.44392751E+00-0.81841581E+00 35 0.49151747E+00-0.81841581E+00 35 0.49151747E+00-0.8184593E+01 34 0.53739768E+00-0.11046213E+01 34 0.53739768E+00-0.116168593E+01 45 0.24444540E+00-0.116168593E+01 45 0.44392751E+00-0.116168592E+01 47 0.1206638E-03-0.14279735E+01 48 0.34491995E+00-0.12056684E+01 49 0.75780656792E-02-0.166385920E+01 47 0.12106638E-03-0.14279735E+01 47 0.12106638E-03-0.14279735E+01 47 0.12106638E-01-0.15787142E+01 50 0.57441148E-01-0.15787142E+01 51 0.036807893E-01-0.15879494504E+01 52 0.47818638E-01-0.15879494504E+01 52 0.47818638E-01-0.1587949E+01 53 0.57441148E-01-0.15787112E+01 54 0.6681459E-01-0.166779745E+01 55 0.75720559E-01-0.16677974E+01 56 0.145419836E-01-0.166791744E+01 57 0.19864588E=01-0.16679174E+01 56 0.1426974688+00-0.1665781442E+01 57 0.19864588E=01-0.16678794E+01 56 0.14261924586=00-0.1665781442E+01 57 0.10665348E+00-0.166578142E+01 57 0.10665348E+00-0.166578142E+01 57 0.10665348E+00-0.166578142E+01 57 0.10665348E+00-0.166578142E+01 57 0.1066534	0.431E-05 0.168E+02-0.298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02 0.345E-06 0.900E+02 0.851E-02 0.431E-05 0.168E+02 0.994E-08 0.901E+02 0.851E-02 0.431E-05 0.168E+02-0.170E-04 0.901E+02 0.851E-02 0.431E-05 0.168E+02-0.178E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.118E-04 0.901E+02 0.851E-02 0.431E-05 0.168E+02-0.118E-04 0.901E+02 0.851E-02 0.431E-05 0.168E+02-0.1298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.1298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.238E-05 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.238E-05 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.1298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.1298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.1298E-08 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.179E-04 0.901E+02 0.851E-02 0.431E-05 0.168E+02-0.179E-04 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.179E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.238E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.238E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.238E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.238E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.256E-04 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.256E-04 0.900E+02 0.851E-02 0.431E-05 0.168E+02-0.256E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.256E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.256E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.279E-04 0.898E+02 0.851E-02 0.431E-05 0.168E+02-0.279E-04 0.897E+02
60 (0.11451124E+00-0.16392431E+0) 61 0.12299688E+00-0.16456174E+0 62 0.13226566E+00-0.16518142E+0 63 0.14260465E+00-0.16579174E+0	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$

Table VI. (cont)

72 C \cdot 31986481E +00-0.16620405E +01 73 C \cdot 34831466E +00-0.1644496E +01 74 C \cdot 37671949E +00-0.16248879E +01 75 C \cdot 40435872E +00-0.15980848E +01 76 C \cdot 43133056E +00-0.15655317E +01 77 C \cdot 45704095E +00-0.15655101248E +01 79 C \cdot 45775259E +00-0.14894675E +01 80 C \cdot 52905773E +00-0.13970249E +01 81 C \cdot 55227156E +00-0.1292480E +01 82 C \cdot 57241833E +00-0.1292480E +01 83 C \cdot 59852447E +00-0.1292480E +01 84 C \cdot 64727127E +00-0.1292480E +01 85 C \cdot 64741833E +00-0.11775785E +01 86 C \cdot 66727127E +00-0.11775785E +01 87 C \cdot 68988457E +00-0.11775785E +01 86 C \cdot 712475 +00-0.92948994E +00 90 C \cdot 75618830E +00-0.86531957E +00 91 C \cdot 7753743E +00-0.86531957E +00 92 C \cdot 79834877E +00-0.86531957E +00 93 C \cdot 181852147E +00-0.67640501E +00 94 C \cdot 8179320E +00-0.67640501E +00 95 C \cdot 87393220E +00-0.67640501E +00 95 C \cdot 87393220E +00-0.49955942E +00 95 C \cdot 87393220E +00-0.49955942E +00 95 C \cdot 87393220E +00-0.55657055E +00 97 C \cdot 87393220E +00-0.55657055E +00 99 C \cdot 798366726E +00-0.55657055E +00 99 C \cdot 798524680E +00-0.5733143E +00 101 0.94422316E +00-0.22733143E +00 101 0.94422316E +00-0.221423670E +00	$\begin{array}{l} 0555555555555555555555555555555555555$	$\begin{array}{c} 0.168E+02-0.404E-04\\ 0.168E+02-0.565E-05\\ 0.168E+02-0.328E-05\\ 0.168E+02-0.306E-06\\ 0.168E+02-0.918E-07\\ 0.168E+02-0.936E-04\\ 0.168E+02-0.395E-04\\ 0.168E+02-0.395E-05\\ 0.168E+02-0.170E-06\\ 0.168E+02-0.170E-06\\ 0.168E+02-0.481E-05\\ 0.168E+02-0.481E-05\\ 0.168E+02-0.481E-05\\ 0.168E+02-0.481E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.201E-05\\ 0.168E+02-0.368E-06\\ 0.168E+02-0.368E-06\\ 0.168E+02-0.368E-06\\ 0.168E+02-0.368E-06\\ 0.168E+02-0.368E-05\\ 0.168E+02-0.368E-05\\ 0.168E+02-0.358E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.442E-05\\ 0.168E+02-0.585E-07\\ 0.168E+02-0.473E-07\\ 0.$	02222222222222222222222222222222222222	0.8511E-002 0.8511E-002 0.8511E-002 0.85511E-002 0.85511E-002 0.85511E-002 0.885511E-0
LOOPWISE MESH POINTS		RADIAL MESH F		
	GRR	GTT GRT	ANGLE	JACOBIAN
$\begin{array}{c} 1 & 0.94614751E+00-0.21469830E+00\\ 2 & 0.95655747E+00-0.17793112E+00\\ 3 & 0.96582946E+00-0.1443934E+00\\ 5 & 0.98113091E+00-0.86780440E-01\\ 6 & 0.98871275E+00-0.62927470E-01\\ 7 & 0.99871275E+00-0.41275836E-01\\ 8 & 0.99763247E+00-0.41275836E-01\\ 9 & 0.10011601E+01-0.56940220E-02\\ 10 & 0.99924548E+00\\ 0.99450126+00& 0.922476815E-01\\ 12 & 0.99048188E+00\\ 0.9288362E-01\\ 13 & 0.97299131E+00\\ 0.923075954545E+00\\ 0.923075962E-02\\ 14 & 0.99048188E+00\\ 0.9288362E-01\\ 15 & 0.99559545E+00\\ 0.65972696E-02\\ 16 & 0.9559545E+00\\ 0.65972696E-02\\ 16 & 0.9559545E+00\\ 0.65972696E-02\\ 16 & 0.9559545E+00\\ 0.65972696E-01\\ 15 & 0.9559545E+00\\ 0.65972696E-02\\ 16 & 0.95017122E+00-0.88189478E-01\\ 18 & 0.95348996E+00-0.88189478E-01\\ 21 & 0.90548996E+00-0.14977744E+00\\ 22 & 0.8917453163E+00-0.14977744E+00\\ 23 & 0.87583163E+00-0.14977744E+00\\ 23 & 0.87583163E+00-0.27334375E+0\\ 24 & 0.85773414E+00-0.27334375E+0\\ 24 & 0.85731102E+00-0.27334375E+0\\ 25 & 0.857731102E+00-0.27334375E+0\\ 25 & 0.857731102E+00-0.27334275E+0\\ 25 & 0.857731102E+00-0.27334375E+0\\ 25 & 0.857731102E+0\\ 25 & 0.8$	03333333333 444199 2982 298	$\begin{array}{c} 0.168E+02& 0.662E-02\\ 0.168E+02& 0.857E-02\\ 0.168E+02& 0.962E-02\\ 0.168E+02& 0.961E-02\\ 0.170E+02& 0.879E-02\\ 0.170E+02& 0.879E-02\\ 0.167E+02& 0.620E-02\\ 0.167E+02& 0.620E-02\\ 0.167E+02& 0.645E-02\\ 0.167E+02& 0.277E-02\\ 0.182E+02-0.277E-02\\ 0.195E+02-0.277E-02\\ 0.195E+02-0.261E-02\\ 0.195E+02-0.241E-02\\ 0.195E+02-0.241E-02\\ 0.195E+02-0.241E-02\\ 0.195E+02-0.258E-02\\ 0.168E+02-0.116E-02\\ 0.168E+02-0.258E-03\\ 0.168E+02-0.114E-03\\ 0.168E+02-0.114E-02\\ 0.168E+02-0.114E-0\\ 0.168E+02-$	0.854542244002 0.85454244002 0.85454244002 0.855554244002 0.8685325544002 0.86855322544002 0.86855322544002 0.8799225424002 0.899225424002 0.9920000000000000000000000000000000	$\begin{array}{c} 0.869E-01\\ 0.855E-01\\ 0.855E-01\\ 0.808E-01\\ 0.758E-01\\ 0.758E-01\\ 0.758E-01\\ 0.758E-01\\ 0.758E-01\\ 0.75E-01\\ 0.694E-01\\ 0.6694E-01\\ 0.6694E-01\\ 0.6672E-01\\ 0.672E-01\\ 0.612E-01\\ 0.612E-01\\ 0.615E-01\\ 0.615E-01\\ 0.615E-01\\ 0.615E-01\\ 0.616E-01\\ 0.616E-0\\ 0.616E-$

71 (.29243111E+00-0.16735388E+01 0.431E-05 0.168E+02 0.274E-05 0.900E+02 0.851E-02 72 [.31986481E+00-0.16620405E+01 0.431E-05 0.168E+02-0.404E-04 0.903E+02 0.851E-02

29 C. 72992388E+00-0.49340315E+00 0.227E-03 0.168E+02-0.993E-03 0.909E+02 0.617E-01 31 C. 66638299F+00-0.55600892E+00 0.227E-03 0.168E+02-0.118E-03 0.909E+02 0.617E-01 31 C. 66613939F+00-0.68047233E+00 0.227E-03 0.168E+02-0.823E-03 0.909E+02 0.617E-01 32 C. 66213939F+00-0.68061028E+00 0.227E-03 0.168E+02-0.818E-02 0.901E+02 0.617E-01 33 C. 57779037E+00-0.880723E+00 0.227E-03 0.168E+02-0.823E-03 0.900E+02 0.617E-01 34 C. 57779037E+00-0.88172218E+00 0.227E-03 0.168E+02-0.823E-03 0.900E+02 0.617E-01 35 C. 49919476E+00-0.88172218E+00 0.227E-03 0.168E+02-0.845E-02 0.8895E+02 0.663E-01 35 C. 49919476E+00-0.88172218E+00 0.2282E-03 0.168E+02-0.845E-02 0.8895E+02 0.663E-01 35 C. 49919476E+00-0.94401146E+30 0.233E-03 0.168E+02 0.939E-02 0.8895E+02 0.663E-01 35 C. 49919476E+00-0.94401146E+30 0.233E-03 0.168E+02 0.939E-02 0.8895E+02 0.663E-01 35 C. 49919476E+00-0.1122165E+01 0.245E-03 0.168E+02 0.3995E-02 0.8895E+02 0.663E-01 35 C. 49919476E+00-0.11221655E+01 0.245E-03 0.168E+02 0.3995E-02 0.8895E+02 0.663E-01 35 C. 293356214E+00-0.11221655E+01 0.245E-03 0.168E+02 0.2939E-02 0.8895E+02 0.663E-01 44 C. 29391703E+00-0.11249580E+01 0.241E-03 0.168E+02 0.9594E-02 0.8895E+02 0.6674E-01 44 C. 29391703E+00-0.11249580E+01 0.247E-03 0.168E+02 0.9674E-02 0.885E+02 0.6674E-01 44 C. 29391703E+00-0.12439580E+01 0.237E-03 0.168E+02 0.9674E-02 0.885E+02 0.6674E-01 44 C. 29391703E+00-0.12439580E+01 0.2381E-03 0.168E+02 0.9674E-02 0.885E+02 0.771E-01 44 C. 29432461E+00-0.12439580E+01 0.2381E-03 0.168E+02 0.9574E-02 0.885E+02 0.771E-01 44 5 0.99932E-01-0.12439580E+01 0.3857E-03 0.168E+02 0.7054E-02 0.885E+02 0.7771E-01 44 5 0.99932E-01-0.12439580E+01 0.3857E-03 0.168E+02 0.7054E-02 0.8858E+02 0.7771E-01 44 5 0.99942E-01-0.12739580E+01 0.3857E-03 0.168E+02 0.7574E-02 0.8858E+02 0.7771E-01 44 5 0.99952E-01-0.128479580E+01 0.3854E-03 0.168E+02 0.7858E-02 0.8858E+02 0.7771E-01 50 0.039542E-01-0.128479580E+01 0.3772E-03 0.0168E+02 0.7732E-02 0.8858E+02 0.7771E-01 50 0.045632E-02 0.04785E+01 0.03577E-03 0.0168E+02 0.04585E+02 0.9868E+02 0.7771E-0

 54
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.4
 0.

Table VI. (cont)

94 0.83962937E+00- 95 0.83961850E+00- 96 0.87571563E+00- 97 0.89218246E+00- 98 0.90750805E+00- 99 0.92163691E+00- 100 0.93450084E+00- 101 0.94614751E+00-	0.50011432E+00 0.44544811E+00 0.39338304E+00 0.34413660E+00 0.29786749E+00 0.25468797E+00	$\begin{array}{c} 0.324 \pm -03\\ 0.345 \pm -03\\ 0.345 \pm -03\\ 0.368 \pm -03\\ 0.495 \pm -03\\ 0.495 \pm -03\\ 0.439 \pm -03\\ 0.451 \pm -03\\ 0.451 \pm -03\\ 0.452 \pm -03\\ 0.452 \pm -03\\ \end{array}$	0.168E+02 0.597E-03 0.168E+02 0.675E-03 0.168E+02 0.807E-03 0.168E+02 0.106E-02 0.168E+02 0.129E-02 0.168E+02 0.241E-02 0.168E+02 0.430E-02 0.168E+02 0.662E-02 RADIAL MESH	0.895E+02 0.895E+02 0.895E+02 0.894E+02 0.893E+02 0.893E+02 0.884E+02 0.884E+02 0.872E+02 0.856E+02	$\begin{array}{c} 0 & 738E - 01 \\ 0 & 761E - 01 \\ 0 & 787E - 01 \\ 0 & 815E - 01 \\ 0 & 845E - 01 \\ 0 & 849E - 01 \\ 0 & 859E - 01 \\ 0 & 870E - 01 \\ 0 & 869E - 01 \\ \end{array}$
₽X	ΡY	GRR	GTT GRT	ANGLE	JACOBIAN
7 0.10151105E+01- H C.10168732E+01- 9 0.10185587E+01- 10 0.105564E+01 11 0.10000041E+01 12 0.9740972E+00 13 0.97228591E+00 14 0.95717520E+00 15 0.94685678E+00 16 0.94685678E+00	$0 \cdot 17941876E + 00$ $0 \cdot 1434570E + 00$ $0 \cdot 14324974E + 01$ $0 \cdot 62509820E - 01$ $0 \cdot 21538729E - 01$ $0 \cdot 21538729E - 01$ $0 \cdot 34879661E - 01$ $0 \cdot 34762426E - 01$ $0 \cdot 328499094E - 01$ $0 \cdot 12703763E - 02$ $0 \cdot 12703763E - 01$ $0 \cdot 227364909E + 00$ $0 \cdot 14549393E + 00$ $0 \cdot 145493905E + 00$ $0 \cdot 22646479E + 00$ $0 \cdot 22646479E + 00$ $0 \cdot 37768738E + 00$ $0 \cdot 48751611E + 00$ $0 \cdot 61949727E + 00$ $0 \cdot 619497827E + 00$ $0 \cdot 619497327E + 00$ $0 \cdot 6194979727E + 00$ $0 \cdot 619497327E + 00$ $0 \cdot 619497422E + 01$ $0 \cdot 1233434E + 01$ $0 \cdot 1233434E + 01$ $0 \cdot 12378812E + 01$ $0 \cdot 12378812E + 01$ $0 \cdot 12397422E + 01$ $0 \cdot 1233434E + 01$ $0 \cdot 12354812E + 01$ $0 \cdot 12354812E + 01$ $0 \cdot 123548422E + 01$ $0 \cdot 13378812E + 01$ $0 \cdot 14625634E + 01$	$\begin{array}{c} 1877 \pm 00\\ 0 + 1778 \pm 00\\ 0 + 1778 \pm 00\\ 0 + 1778 \pm 00\\ 0 + 1584 \pm 000\\ 0 + 1284 \pm 0 + 000\\$	$\begin{array}{c} 0 \cdot 175E + 02 & 0 \cdot 347E + 00 \\ 0 \cdot 172E + 02 & 0 \cdot 434E + 00 \\ 0 \cdot 169E + 02 & 0 \cdot 435E + 00 \\ 0 \cdot 169E + 02 & 0 \cdot 445E + 00 \\ 0 \cdot 169E + 02 & 0 \cdot 445E + 00 \\ 0 \cdot 179E + 02 & 0 \cdot 402E + 00 \\ 0 \cdot 179E + 02 & 0 \cdot 302E + 00 \\ 0 \cdot 159E + 02 & 0 \cdot 208E + 00 \\ 0 \cdot 201E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 201E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 201E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 418E + 02 - 0 \cdot 208E + 00 \\ 0 \cdot 175E + 02 - 0 \cdot 118E + 00 \\ 0 \cdot 175E + 02 - 0 \cdot 128E - 01 \\ 0 \cdot 175E + 02 - 0 \cdot 148E - 02 \\ 0 \cdot 175E + 02 - 0 \cdot 148E - 02 \\ 0 \cdot 175E + 02 - 0 \cdot 424E - 01 \\ 0 \cdot 175E + 02 - 0 \cdot 424E - 01 \\ 0 \cdot 175E + 02 - 0 \cdot 424E - 01 \\ 0 \cdot 175E + 02 - 0 \cdot 559E - 01 \\ 0 \cdot 175E + 02 - 0 \cdot 525E + 00 \\ 0 \cdot 175E + 02 - 0 \cdot 525E + 00 \\ 0 \cdot 189E + 02 - 0 \cdot 525E + 00 \\ 0 \cdot 189E + 02 - 0 \cdot 525$	$\begin{array}{c} \bullet & 7959 \\ \bullet & \bullet & 022 \\ \bullet & $	$\begin{array}{c} 0.178 \pm +01\\ 0.169 \pm +01\\ 0.156 \pm +01\\ 0.135 \pm +01\\ 0.133 \pm +01\\ 0.117 \pm +01\\ 0.117 \pm +01\\ 0.117 \pm +01\\ 0.101 \pm +00\\ 0.795 \pm +00\\ 0.739 \pm +00\\ 0.398 \pm +00\\ 0.403 \pm +00\\ 0.403 \pm +00\\ 0.405 \pm +00\\ 0.409 \pm \pm +00\\ 0.412 \pm \pm +01\\ 0.124 \pm \pm +01\\ 0.144 \pm \pm +01\\ $

$\begin{array}{c} 67 & (\mathbf{c} \cdot 19743327 \mathbf{\bar{c}} \pm 00 - \\ 68 & (\mathbf{c} \cdot 21880879 \mathbf{c} \pm 00 - \\ 71 & (\mathbf{c} \cdot 2965003 \mathbf{c} \pm 00 - \\ 71 & (\mathbf{c} \cdot 2965003 \mathbf{c} \pm 00 - \\ 72 & (\mathbf{c} \cdot 32562 \mathbf{c} \cdot 37 \mathbf{c} \pm 00 - \\ 73 & (\mathbf{c} \cdot 32562 \mathbf{c} \cdot 37 \mathbf{c} \pm 00 - \\ 73 & (\mathbf{c} \cdot 32562 \mathbf{c} \cdot 37 \mathbf{c} \pm 00 - \\ 73 & (\mathbf{c} \cdot 32551534 \mathbf{c} \pm 00 - \\ 73 & (\mathbf{c} \cdot 32551534 \mathbf{c} \pm 00 - \\ 74 & (\mathbf{c} \cdot 3497952 \mathbf{c} \pm 00 - \\ 75 & (\mathbf{c} \cdot 41327952 \mathbf{c} \pm 00 - \\ 75 & (\mathbf{c} \cdot 49215726 \mathbf{c} \pm 00 - \\ 77 & (\mathbf{c} \cdot 46710573 \mathbf{c} \pm 00 - \\ 77 & (\mathbf{c} \cdot 49215726 \mathbf{c} \pm 00 - \\ 77 & (\mathbf{c} \cdot 49215726 \mathbf{c} \pm 00 - \\ 77 & (\mathbf{c} \cdot 53984468 \mathbf{c} \pm 00 - \\ 81 & (\mathbf{c} \cdot 563914349 \mathbf{c} \pm 00 - \\ 82 & (\mathbf{c} \cdot 53984468 \mathbf{c} \pm 00 - \\ 83 & (\mathbf{c} \cdot 6398449 \mathbf{c} \pm 00 - \\ 84 & (\mathbf{c} \cdot 6328449 \mathbf{c} \pm 00 - \\ 85 & (\mathbf{c} \cdot 67914713 \mathbf{c} \pm 00 - \\ 85 & (\mathbf{c} \cdot 79373736 \mathbf{c} \pm 00 - \\ 85 & (\mathbf{c} \cdot 79486852 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 8170383 \mathbf{c} \pm 00 - \\ 93 & (\mathbf{c} \times 838997430 \mathbf{c} \pm 00 - \\ 93 & (\mathbf{c} \times 8389426 \mathbf{a} 26 \mathbf{c} + 00 - \\ 93 & (\mathbf{c} \times 839940551 \mathbf{c} \pm 00 - \\ 94 & (\mathbf{c} \times 8599651 \mathbf{c} \pm 00 - \\ 95 & (\mathbf{c} \cdot 90103755 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 00 - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) - \\ 97 & (\mathbf{c} \cdot 91877455 \mathbf{c} \pm 0) $	$ \begin{array}{l} \hline 0 & 15668572 \ event begin{tabular}{l} \hline 0 & 159842823 \ event begin{tabular}{l} \hline 0 & 1599265 \ event begin{tabular}{l} \hline 0 & 166114191 \ event begin{tabular}{l} \hline 0 & 166114191 \ event begin{tabular}{l} \hline 0 & 16611417 \ event begin{tabular}{l} \hline 0 & 166301417 \ event begin{tabular}{l} \hline 0 & 16650127 \ event begin{tabular}{l} \hline 0 & 16670127 \ event begin{tabular}{l} \hline 0 & 16670127 \ event begin{tabular}{l} \hline 0 & 166971429 \ event begin{tabular}{l} \hline 0 & 16697442 \ event begin{tabular}{l} \hline 0 & 16697442 \ event begin{tabular}{l} \hline 0 & 166737487 \ event begin{tabular}{l} \hline 0 & 166067593 \ event begin{tabular}{l} \hline 0 & 166067593 \ event begin{tabular}{l} \hline 0 & 16737487 \ event begin{tabular}{l} \hline 0 & 166067519 \ event begin{tabular}{l} \hline 0 & 16737487 \ event bevent begin{tabular}{l} \hline 0 & 16737487 \ event begin{tabular$	$\begin{array}{c} 0 & 135 \\ 5 \\ 135 \\ 15 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 1$	$\begin{array}{c} 1 & 33E + 02 - 0 & 597E + 00 \\ 1 & 59E + 02 - 0 & 528E + 00 \\ 1 & 59E + 02 - 0 & 483E + 00 \\ 1 & 89E + 02 - 0 & 483E + 00 \\ 1 & 80E + 02 - 0 & 43E + 00 \\ 1 & 80E + 02 - 0 & 43E + 00 \\ 1 & 77E + 02 - 0 & 290E + 00 \\ 2 & 00E + 02 - 0 & 295E + 00 \\ 1 & 92E + 02 - 0 & 295E + 00 \\ 1 & 93E + 02 - 0 & 295E + 00 \\ 1 & 93E + 02 - 0 & 296E + 00 \\ 1 & 93E + 02 - 0 & 296E + 00 \\ 1 & 93E + 02 - 0 & 365E - 01 \\ 1 & 93E + 02 & 0 & 365E - 01 \\ 1 & 93E + 02 & 0 & 365E - 01 \\ 1 & 93E + 02 & 0 & 365E - 01 \\ 1 & 93E + 02 & 0 & 365E - 01 \\ 1 & 94E + 02 & 0 & 365E - 01 \\ 1 & 94E + 02 & 0 & 365E - 01 \\ 1 & 94E + 02 & 0 & 365E - 01 \\ 1 & 94E + 02 & 0 & 692E - 02 \\ 1 & 92E + 02 - 0 & 571E - 02 \\ 0 & 1 & 93E + 02 - 0 & 5328E - 02 \\ 0 & 1 & 89E + 02 - 0 & 5328E - 02 \\ 0 & 1 & 89E + 02 - 0 & 5328E - 02 \\ 0 & 1 & 85E + 02 - 0 & 333E - 01 \\ 0 & 1 & 78E + 02 - 0 & 333E - 01 \\ 0 & 1 & 78E + 02 - 0 & 434E - 01 \\ 0 & 1 & 78E + 02 - 0 & 434E - 01 \\ 0 & 1 & 78E + 02 - 0 & 434E - 01 \\ 0 & 1 & 78E + 02 - 0 & 434E - 01 \\ 0 & 1 & 78E + 02 - 0 & 434E - 01 \\ 0 & 1 & 78E + 02 - 0 & 377E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 - 0 & 597E - 01 \\ 0 & 1 & 78E + 02 & 0 & 561E - 01 \\ 0 & 1 & 78E + 02 & 0 & 561E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 69E + 02 & 0 & 597E - 01 \\ 0 & 1 & 69E + 02 & 0 & 598E - 01 \\ 0 & 1 & 69E + 02 & 0 & 598E - 01 \\ 0 & 1 & 69E + 02 & 0 & 598E - 01 \\ 0 & 1 & 69E + 02 & 0 & 598E - 01 \\ 0 & 1 & 69E + 02 & 0 & 598E - 01 \\ 0 & 1 & 69E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598E - 01 \\ 0 & 1 & 78E + 02 & 0 & 598$	$0 + 1095 \pm 1000 = 0 + 00000 = 0 + 000000 = 0 + 000000 = 0 + 000000 = 0 + 000000 = 0 + 00000000$	$\begin{array}{c} 0 & 1 & 4 & 6 & E + & 0 & 1 \\ 0 & 1 & 3 & 7 & E + & 0 & 1 \\ 0 & 1 & 1 & 5 & 0 & E + & 0 & 1 \\ 0 & 1 & 1 & 3 & 4 & E + & 0 & 1 \\ 0 & 1 & 1 & 3 & 4 & E + & 0 & 1 \\ 0 & 1 & 1 & 3 & 4 & E + & 0 & 1 \\ 0 & 1 & 1 & 3 & 4 & E + & 0 & 1 \\ 0 & 1 & 1 & 0 & E + & 0 & 1 \\ 0 & 1 & 1 & 0 & E + & 0 & 1 \\ 0 & 1 & 1 & 0 & E + & 0 & 1 \\ 0 & 1 & 1 & 0 & E + & 0 & 1 \\ 0 & 1 & 0 & 0 & E + & 0 & 0 \\ 0 & 1 & 1 & 0 & E + & 0 & 0 \\ 0 & 1 & 1 & 0 & E + & 0 & 0 \\ 0 & 1 & 1 & 0 & E + & 0 & 0 \\ 0 & 0 & 1 & 0 & E + & 0 & 0 \\ 0 & 0 & 1 & 0 & E + & 0 & 0 \\ 0 & 0 & 1 & 0 & E + & 0 & 0 \\ 0 & 0 & 1 & 0 & E + & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$
LOOPWISE MESH POINTS	s au		RADIAL MESH		
PX	PY	GRR	GTT GRT	ANGLE	JACOBIAN
1 C.16492804E+01- 2 C.16396469E+01- 3 C.16016065E+01- 4 O.15480298E+01- 5 C.14860418E+01 6 C.14205085E+01	-0.14653588E+00 -0.67337991E-01	0.509E+02 0.480E+02 0.419E+02 0.342E+02 0.262E+02 0.190E+02	0.430E+02 0.483E+01 0.335E+02-0.163E+01 0.268E+02-0.625E+01 0.190E+02-0.875E+01 0.211E+02-0.106E+02 0.207E+02-0.849E+01	0.923E+02 0.101E+03 0.110E+03 0.117E+03	0.466E+02 0.401E+02 0.329E+02 0.239E+02 0.210E+02 G.179E+02

 Abble V1. (cont)

 7
 1.356798875.01
 0.4446358875.01
 0.4345.02
 0.4235.02
 0.8075.01
 0.1145.02
 0.1445.02

 7
 1.310466665.01
 0.0105.07285.01
 0.4345.02
 0.4345.02
 0.4665.01
 0.1145.02
 0.1145.02

 1
 1.11046665.01
 0.0105.07285.01
 0.0135.02
 0.0135.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02
 0.0114.02

Table VI. (cont)

72 0.35367574E+00-0.17261177E+01	$\begin{array}{c} 0.285 \pm 0.0 & 0.498 \pm 0.2 - 0.93 (E \pm 0.0 \\ 0.184 \pm 0.0 & 0.490 \pm 0.2 - 0.634 \pm 0.0 \\ 0.121 \pm 0.0 & 0.511 \pm 0.2 - 0.299 \pm 0.0 \\ 0.828 \pm -0.1 & 0.525 \pm 0.2 - 0.107 \pm 0.0 \\ 0.652 \pm -0.1 & 0.510 \pm 0.2 - 0.258 \pm 0.0 \\ 0.552 \pm -0.1 & 0.510 \pm 0.2 - 0.258 \pm 0.0 \\ 0.552 \pm -0.1 & 0.510 \pm 0.2 - 0.971 \pm 0.0 \\ 0.564 \pm -0.1 & 0.499 \pm 0.2 - 0.971 \pm 0.0 \\ 0.564 \pm -0.1 & 0.499 \pm 0.2 - 0.971 \pm 0.0 \\ 0.564 \pm -0.1 & 0.499 \pm 0.2 - 0.142 \pm 0.0 \\ 0.564 \pm -0.1 & 0.499 \pm 0.2 - 0.142 \pm 0.0 \\ 0.564 \pm -0.1 & 0.498 \pm 0.2 - 0.168 \pm 0.0 \\ 0.101 \pm 0.0 & 0.498 \pm 0.2 - 0.168 \pm 0.0 \\ 0.101 \pm 0.0 & 0.509 \pm 0.2 - 0.166 \pm 0.0 \\ 0.111 \pm 0.0 & 0.509 \pm 0.2 - 0.166 \pm 0.0 \\ 0.114 \pm 0.0 & 0.509 \pm 0.2 - 0.149 \pm 0.0 \\ 0.114 \pm 0.0 & 0.509 \pm 0.2 - 0.149 \pm 0.0 \\ 0.133 \pm 0.0 & 0.544 \pm 0.2 - 0.390 \pm 0.0 \\ 0.237 \pm 0.1 & 0.316 \pm 0.2 & 0.428 \pm 0.0 \\ 0.133 \pm 0.0 & 0.518 \pm 0.2 & 0.487 \pm 0.0 \\ 0.371 \pm 0.1 & 0.316 \pm 0.2 & 0.487 \pm 0.0 \\ 0.371 \pm 0.1 & 0.316 \pm 0.2 & 0.108 \pm 0.0 \\ 0.316 \pm 0.2 & 0.315 \pm 0.2 & 0.129 \pm 0.0 \\ 0.316 \pm 0.2 & 0.315 \pm 0.2 & 0.129 \pm 0.0 \\ 0.316 \pm 0.2 & 0.315 \pm 0.2 & 0.129 \pm 0.0 \\ 0.119 \pm 0.2 & 0.315 \pm 0.2 & 0.129 \pm 0.0 \\ 0.133 \pm 0.0 & 0.316 \pm 0.2 & 0.129 \pm 0.0 \\ 0.455 \pm 0.2 & 0.313 \pm 0.2 & 0.129 \pm 0.0 \\ 0.495 \pm 0.2 & 0.313 \pm 0.2 & 0.108 \pm 0.0 \\ 0.495 \pm 0.2 & 0.318 \pm 0.2 & 0.108 \pm 0.0 \\ 0.495 \pm 0.2 & 0.318 \pm 0.2 & 0.108 \pm 0.0 \\ 0.483 \pm 0.0 & 0.318 \pm 0.2 & 0.108 \pm 0.0 \\ 0.483 \pm 0.2 & 0.318 \pm 0.2 & 0.108 \pm 0.0 \\ 0.483 \pm 0.2 & 0.318 \pm 0.2 & 0.108 \pm 0.0 \\ 0.483 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.483 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.483 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0.2 & 0.483 \pm 0.0 \\ 0.50 \pm 0.2 & 0.430 \pm 0$	$\begin{array}{c} 0 & 0 & 102 \pm 03 & 0 & 294 \pm 01 \\ 0 & 0 & 969 \pm 02 & 0 & 247 \pm 01 \\ 0 & 0 & 99 \pm 02 & 0 & 208 \pm 01 \\ 0 & 0 & 99 \pm 02 & 0 & 181 \pm 01 \\ 0 & 0 & 107 \pm 03 & 0 & 162 \pm 01 \\ 0 & 0 & 107 \pm 03 & 0 & 137 \pm 01 \\ 0 & 0 & 125 \pm 03 & 0 & 137 \pm 01 \\ 1 & 0 & 132 \pm 03 & 0 & 133 \pm 01 \\ 1 & 0 & 132 \pm 03 & 0 & 133 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 138 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 138 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 138 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 185 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 185 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 185 \pm 01 \\ 1 & 0 & 139 \pm 03 & 0 & 185 \pm 01 \\ 1 & 0 & 129 \pm 03 & 0 & 185 \pm 01 \\ 1 & 0 & 129 \pm 03 & 0 & 267 \pm 01 \\ 1 & 0 & 129 \pm 03 & 0 & 267 \pm 01 \\ 1 & 0 & 47 \pm 02 & 0 & 345 \pm 01 \\ 1 & 0 & 47 \pm 02 & 0 & 345 \pm 01 \\ 1 & 0 & 47 \pm 02 & 0 & 450 \pm 01 \\ 1 & 0 & 47 \pm 02 & 0 & 145 \pm 02 \\ 2 & 0 & 483 \pm 02 & 0 & 121 \pm 02 \\ 2 & 0 & 483 \pm 02 & 0 & 145 \pm 02 \\ 2 & 0 & 483 \pm 02 & 0 & 195 \pm 02 \\ 2 & 0 & 476 \pm 02 & 0 & 232 \pm 02 \\ 2 & 0 & 476 \pm 02 & 0 & 279 \pm 02 \\ 2 & 0 & 476 \pm 02 & 0 & 279 \pm 02 \\ 2 & 0 & 576 \pm 02 & 0 & 279 \pm 02 \\ 2 & 0 & 576 \pm 02 & 0 & 466 \pm 02 \\ 2 & 0 & 757 \pm 02 & 0 & 466 \pm 02 \\ 1 & 0 & 841 \pm 02 & 0 & 466 \pm 02 \\ \end{array}$
LOOPWISE MESH POINTS PX PY	RADIAL MESH GRR GTT GRT	POINT = 5 ANGLE JACOBIAN
1 0.36500000E+01-0.3000000E+90 2 0.35685317E+01 0.39949144E-01 3 0.30782535E+01 0.42850921E+00 5 0.27877507E+01 0.45000000E+00 7 0.22639143E+01 0.45000000E+00 7 0.22639143E+01 0.45000000E+00 9 0.20318038E+01 0.45000000E+00 10 0.16249462E+01 0.45000000E+00 11 0.16249462E+01 0.45000000E+00 12 0.18140100E+01 0.45000000E+00 13 0.114743315+01 0.45000000E+00 14 0.10228241E+01 0.45000000E+00 15 0.93201930E+00 0.36497500E+00 16 0.86651783E+00 0.28926691E+00 17 0.81578177E+00 0.221697851E+00 18 0.77470168E+00 0.39523734E-01 20 0.71152404E+00 0.39523734E-01 21 0.64654895E+00-0.71446928E-02 22 0.664694835E+00-0.48844660E-01 23 0.64521962E+00-0.86510746E-01 24 0.62748133F+00-0.12510071E+00 24 0.62748133F+00-0.12510774E+00 25 0.664521962E+00-0.15360071E+00 26 0.59493832E+00-0.18493524E+00 27 0.57799246E+00-0.2467132048E+00 27 0.57799246E+00-0.2467132048E+00 28 0.56288396E+00-0.24771206E+00 28 0.56288396E+00-0.24771206E+00 28 0.56288396E+00-0.24771206E+00 28 0.56288396E+00-0.24771206E+00 26 0.56288396E+00-0.24771206E+00 26 0.56288396E+00-0.24771206E+00 26 0.56288396E+00-0.24771206E+00 26 0.56288396E+00-0.24771206E+00 26 0.56288395E+00-0.24771206E+00 28 0.562888395E+00-0.24771206E+00 28 0.562888395E+00-0.24771206E+00 28 0	$\begin{array}{c} 0.142E+01 & 0.220E+03-0.159E-0\\ 0.142E+01 & 0.220E+03 & 0.647E-0\\ 0.142E+01 & 0.220E+03 & 0.647E-0\\ 0.142E+01 & 0.220E+03 & 0.000E+0\\ 0.142E+01 & 0.220E+03 & 0.260E+0\\ 0.142E+01 & 0.220E+03-0.260E+0\\ 0.142E+01 & 0.220E+03-0.260E+0\\ 0.142E+01 & 0.220E+03-0.158E-0\\ 0.142E+01 & 0.220E+03-0.118E-0\\ 0.142E+01 & 0.220E+03-0.118E-0\\ 0.142E+01 & 0.220E+03-0.118E-0\\ 0.142E+01 & 0.220E+03-0.842E-0\\ 0.142E+01 & 0.220E+03-0.842E-0\\ 0.142E+01 & 0.220E+03-0.842E-0\\ 0.142E+01 & 0.220E+03-0.710E-0\\ 0.142E+01 & 0.220E+03-0.7$	$\begin{array}{c} 5 & 0 & 9 & 00E + 02 \\ 4 & 0 & 9 & 00E + 02 \\ 0 & 0 & 177E + 02 \\ 4 & 0 & 9 & 00E + 02 \\ 0 & 0 & 177E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 00E + 02 \\ 0 & 0 & 9 & 01E + 02 \\ 0 & 0 & 9 & 01E + 02 \\ 0 & 0 & 9 & 01E + 02 \\ 0 & 0 & 9 & 01E + 02 \\ 0 & 0 & 177E + 02 \\ 1 & 0 & 9 & 01E + 02 \\ 0 & 0 & 177E + 02 \\ 1 & 0 & 9 & 00E + 02 \\ 0 & 0 & 177E + 02 \\ 0 & 9 & 00E + 02 \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0E \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0$

Table VI. (cont)	
------------------	--

ŀ

$\begin{array}{c} 41-6.50141576E+00-\\ 42-C.67895373E+00-\\ 43-6.86715398E+00-\\ 43-6.86715398E+00-\\ 44-0.106547698E+01-\\ 45-0.12732904E+01-\\ 45-0.12732904E+01-\\ 46-C.17416321E+01-\\ 49-C.20935795E+01-\\ 51-0.22090096E+01-\\ 51-0.22500000E+01-\\ 52-0.22500000E+01-\\ 53-C.20935795E+01-\\ 54-C.17116321E+01-\\ 55-0.17116321E+01-\\ 55-0.17116321E+01-\\ 55-0.17116329E+01-\\ 55-0.171398E+00-\\ 61-0.50141576E+00-\\ 62-0.33496655E+00-\\ 63-0.17996093E+00-\\ 64-0.36366560E-01-\\ 65-0.2906551050E+01-\\ 55-0.1799528+00-\\ 64-0.36366560E-01-\\ 65-0.2906551050E+01-\\ 55-0.37558E+00-\\ 64-0.35237708E+00-\\ 64-0.35237708E+00-\\ 64-0.35237708E+00-\\ 67-0.2906551050E+01-\\ 55-0.5790932E+00-\\ 67-0.559493832E+00-\\ 71-0.478790224E+00-\\ 72-0.59943220E+00-\\ 73-0.56288390E+00-\\ 74-0.559493832E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 75-0.599493832E+00-\\ 74-0.56288390E+00-\\ 75-0.66459931E+00-\\ 68-0.57909224E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 75-0.66459931E+00-\\ 68-0.57909224E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 74-0.56288390E+00-\\ 75-0.6645943832E+00-\\ 74-0.56288390E+00-\\ 75-0.664594383E+00-\\ 75-0.664594383E+00-\\ 76-0.57909224E+00-\\ 75-0.57909224E+00-\\ 75-0.5790922$	$\begin{array}{c} 0 & 34968850E + 30 \\ 0 & 142E + 01 \\ 0 & 47038619E + 00 \\ 0 & 142E + 01 \\ 0 & 61362566E + 00 \\ 0 & 142E + 01 \\ 0 & 6136256E + 00 \\ 0 & 142E + 01 \\ 0 & 6136256E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 80000000E + 00 \\ 0 & 142E + 01 \\ 0 & 142E +$	$\begin{array}{c} 0 & 2 & 2 & 0 & 2 & - 0 & 3 & - 0 & 1 & 7 & 7 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & - 0 & 1 & 1 & 3 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & - 0 & - 1 & 1 & 9 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & - 0 & - 1 & 4 & 2 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & - 0 & - 1 & 4 & 2 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & - 0 & - 1 & 4 & 2 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & - 0 & - 0 & - 1 & 4 & 2 & E & - 0 & 1 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & - & 2 & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & E & + 0 & 0 & 0 \\ 0 & - & & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & - & & & 2 & 0 & E & + 0 & 3 & 0 & - 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & - & & & & & & & & & & & & & & & & &$	$\begin{array}{c} 0.900 \overline{E} + 02 & 0.177 \overline{E} + 02 \\ 0.900 \overline{E} + 02 & 0.177 \overline{E} + 0.02 \\ 0.900 \overline{E} + 0.02 & 0.177 \overline{E} + 0.02 \\ 0.900 \overline{E} + 0.02 & 0.177 \overline{E} + 0.02 \\ 0.900 \overline{E} + 0.02 & 0.177 \overline{E} + 0.02 \\ 0.900 \overline{E} + 0.02 & 0.177 \overline{E} + 0.02 \\ 0.900$
R1 C.68654889C+00 82 0.711524044E+00 83 0.74051350C+00 84 C.77470168E+00 85 0.61576177E+00 86 0.86651783E+00 87 C.93201930E+00 80 C.10228241E+01 89 0.11474331E+01 9 C.12900379E+01	$\begin{array}{c} 0 - 0 \cdot 15671447F + 01 & 0.142E + 0\\ 0 - 0 \cdot 14604763E + 01 & 0.142E + 0\\ 0 - 0 \cdot 146777355 + 01 & 0.142E + 0\\ 0 - 0 \cdot 12830215E + 01 & 0.142E + 0\\ 0 - 0 \cdot 12830215E + 01 & 0.142E + 0\\ 0 - 0 \cdot 12107331E + 01 & 0.142E + 0\\ 0 - 0 \cdot 11350250E + 01 & 0.142E + 0\\ 1 - 0 \cdot 10682741E + 01 & 0.142E + 0\\ 1 - 0 \cdot 10500000E + 01 & 0.142E + 0\\ 1 - 0 \cdot 10500000E + 01 & 0.142E + 0\\ 1 - 0 \cdot 10500000E + 01 & 0.142E + 0\\ \end{array}$	$\begin{array}{c} 1 & 0 & 2 & 2 & 0 \\ \hline & 0 \\ \hline & 0 & 0 \\ \hline &$	0.900E+02 0.177E+02 0.901E+02 0.177E+02

Table VI. (cont)

92 0.16249462E \cdot 01 - 0.10500000E \cdot 01 93 0.18190100E \cdot 01 - 0.10500000E \cdot 01 94 0.20318038E \cdot 01 - 0.10500000E \cdot 01 95 0.22639143E \cdot 01 - 0.10500000E \cdot 01 96 C.25157924E \cdot 01 - 0.10500000E \cdot 01 97 0.27677507E \cdot 01 - 0.10500000E \cdot 01 97 0.30782535E \cdot 01 - 0.10285072E \cdot 01 99 C.33578709E \cdot 01 - 0.89401531E \cdot 00 10 C C S5645317E \cdot 01 - 0.63994914E \cdot 00	0.142E+01 0.220E+03 0.142E+01 0.220E+03 0.142E+01 0.220E+03 0.142E+01 0.220E+03 0.142E+01 0.220E+03 0.142E+01 0.220E+03 0.142E+01 0.220E+03 0.142E+01 0.220E+03	0.000E+00 0.000E+00 0.000E+00 0.000E+00 0.000E+00 -0.448E-04 0.813E-04 -0.647E-05	0.900E+02 0.900E+02 0.900E+02 0.900E+02 0.900E+02 0.900E+02 0.900E+02 0.900E+02 0.900E+02	0.177E+02 0.177E+02 0.177E+02 0.177E+02 0.177E+02 0.177E+02 0.177E+02 0.177E+02 0.177E+02
100 C . 35685317E + 01 - 0 . 53994914E + 00 101 C . 36500000E + 01 - 0 . 30000000E + 00	0.142E+01 0.220E+03	-0.159E-03	0.900E+02	0.177E+02

÷.

Table VII. Sample outputs for MINT code.

*** SRA MINT CASCADE CODE ***

JINITIAL INPUT STREAM

1

DIM1-DIM10,DIM12,DIM14 1.33C5E-06 2.4430E+00 2.8567E-01 1.8226E-06 1.1693E-01 1.5558E-07 2.1312E-07 1.8226E-06 1.0000E+00 7.7048E-05 2.6610E-06 0.0000E+0 T, P, H-TOTAL = 1.05847E+00 1.220U7E+00 1.05847E+00

ODIRECTION-1 DIFFERENCE OPERATORS

1	-1.50003000E+00	2.00000002+00-5.00000000E-0	L 1.0000000E+00-2.00000005+	0 1.00000000E+00
2		0.00000000E+C0 5.0000000E-0		
3	5.000000000000	-2.00000000E+00 1.50000000E+0	0 1.0000000E+00-2.0000000CE+	1.00000000E+CC

ODIRECTION-3 DIFFERENCE OPERATORS

1.00000000E+00-2.00000000E+00 1.0000000E+00 1.0000000E+00-2.00000000E+00 1.0000000E+00 1.00000000E+00-2.00000000E+00 1.00000000E+00

 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 1
 WREE = 300... 0.778. **ÖPWL(LLX)** PULLLX: 0.10000E+01 0.10000E+

UPSTREAM TOTAL PRESSURE - LX.PDUN 58 0.1231066572E+01

0PUL(LLX) 0-96819E+00 0-96691E+00 0-96521E+00 0-96326E+00 0-96038E+00 0-96273E+00 0-97550E+00 0-96404E+00 0-93354E+00 0-92650E+00 0-91411E+00 0-791A9E+00 0-62176E+00 0-54257E+00 0-5655EE+00 0-5655EE+00 0-66966E+00 0-9265E+00 0-93403E+00 0-95200E+00 0-95502E+00 0-95409E+00 0-95479E+00 0-95563E+00 0-95689E+00 0-95790E+00 0-9619E+00 0-96675E+00 0-97479E+00 0-95200E+00 0-95502E+00 0-95409E+00 0-95479E+00 0-95563E+00 0-95689E+00 0-95790E+00 0-9619E+00 0-96675E+00 0-9748E+00 0-97732E+00 0-9795E+00 0-99960E+00 0-10135E+01 0+10304E+01 0+10573E+01 0+1077E+01 0+10974E+01 0+11244E+01 0+11522E+01

0.1179AE+01 0.12066E+01 0.12310E+01 0.12527E+01 0.12736E+01 0.12906E+01 0.13036E+01 0.13128E+01 0.13187E+01 0.1 0.13172E+01 9.13178E+01 0.15922+01 0.14295E+01 0.14815E+01 0.15937E+01 0.5021E+01 0.13978E+01 0.1466(+01 0.1 0.1452E+01 9.13474E+01 0.13445+01 0.13185E+01 0.14015E+01 0.1399E+01 0.13978E+01 0.12778E+01 0.12778E+00 0.77898E+00 0.77898E+00 0.77898E+00 0.75678E+00 0.75678E+00 0.75678E+00 0.75678E+00 0.7697E+00 0.878338E+00 0.76892E+00 0.76652E+00 0.7700E+01 0.18738E+00 0.96763E+00 0.96878E+00 0.96652E+00 0.96504E+00 0.96521E+00 0.96763E+00 0.96878E+00 0.9	80975F+00 77926E+00 90879E+00 56883E+00
30L14(LLX) 0.5559RE-03 0.5559RE-03 0.51934E-03 0.48553E-03 0.455450E-03 0.42618E-03 0.40050F-03 0.37733E-03 0.35653E-03 0.3 0.52150E-03 0.30703E-03 0.27441E-03 0.27844E-03 0.27538E-03 0.26641E-03 0.23591E-03 0.25597E-03 0.33592E-03 0.3 0.21782E-03 0.21782E-03 0.3556E-13 0.33584E-03 0.27538E-03 0.26641E-03 0.23591E-03 0.23591F-03 0.23591E-03 0.33592E-03 0.3 0.33592E-03 0.33593E-03 0.21786E-03 0.21786E-03 0.13596E-03 0.10000E-03 0.1000E-03 0.10000E-03 0.1000E-03 0.1000E-03 0.10000E-03 0.1000E-03	33796F-03 21701E-C3 33592F-03 10000F-03 1720F-01 723150F-01 72396F-01 72396F-02 10800E-03 10965E-02 400600E-02 40660E-02
0.12208F-02 0.79952E-03 0.80234E-03 0.52362E-03 0.52503E-03 0.52654E-03 0.341MUE-03 0.3422E-03 0.34275E-03 0.52 0.0CAL HEAT IRANSFER COFF 0.29E58E+02 0.30375E+02 0.30952E+02 0.31571E+02 0.32152E+02 0.32343E+02 0.32085E+02 0.33277E+02 0.35949E+02 0.3 0.3566E+02 0.518866+02 0.66972E+02 0.76487E+02 0.73698E+02 0.74187E+02 0.44428E+02 0.48100E+02 0.3764E+12 0.3 0.3566E+02 0.3A379E+02 0.34013E+02 0.3597E+02 0.33199E+02 0.32792E+02 0.32138E+02 0.31136E+02 0.3658E+02 0.30558E+02 0.3 0.40951E+02 0.24011E+02 0.26987E+02 0.25987E+02 0.33199E+02 0.24886E+02 0.278525E+02 0.37259E+02 0.30558E+02 0.3 0.40951E+02 0.48337E+02 0.56009E+02 0.25987E+02 0.73664E+02 0.278878E+02 0.47259E+02 0.30558E+02 0.3 0.40951E+02 0.48337E+03 0.15115E+03 0.22749E+03 0.23377E+02 0.83487E+02 0.33487E+02 0.47259E+02 0.10020E+03 0.3 0.26507E+03 0.26166E+03 0.255137+03 0.23971E+03 0.22648E+03 0.21724E+03 0.2111E+03 0.20736E+03 0.20404E+03 0.3 0.26507E+03 0.426166E+03 0.4255137+03 0.323971E+03 0.42057E+03 0.13070E+03 0.12249E+03 0.11290E+03 0.116E+03 0.20404E+03 0.3 0.70386E+02 0.55692E+02 0.43253E+02 0.434382E+02 0.43050E+02 0.30491E+02 0.35243E+02 0.3940E22E+03 0.20404E+03 0.3 0.50181E+02 0.455367E+02 0.4600E+02 0.43139E+02 0.43139E+02 0.35543E+02 0.39309E+02 0.43354E+02 0.4 0.50181E+02 0.455367E+02 0.4600E+02 0.43139E+02 0.43139E+02 0.30570E+03 0.12274E+03 0.27454E+03 0.27454E+03 0.20404E+03 0.20404E+03 0.20404E+03 0.2 0.50181E+02 0.455367E+02 0.4600E+02 0.43139E+02 0.43139E+02 0.35543E+02 0.39309E+02 0.431354E+02 0.4 0.50181E+02 0.455367E+02 0.4600E+02 0.43139E+02 0.43139E+02 0.35543E+02 0.431354E+02 0.43139E+02 0.43139E+02 0.43132E+02 0.431354E+02 0.43154E+02 0.43154	316,000 316,000 316,000 310,0000 310,000 310,000 310,000 310,000 310,000 310,000 31
••• (1)0-15542+01 (5)- 0-02222-00 (4)- 0-00452-00 (5)- 0-55722-00 (
FRC7 = -0.588222400 FRCX = 0.165738+01 FRCN = -0.588228+00FRC = 0.165738+01	
0CHÓR=-0.25671E+00 ◆ REAVG = 0.866E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 1E0= 1 RESAVGE 0.866E+04 RESEQ=-0.611E+05 LX= 95 LY= 1 LZ= 2 IE0= 3 RESAVGE 0.663E+04 RESEQ=-0.116E+06 LX= IFD= 4 RESAVGE 0.866E+04 RESEQ= 0.955E+05 LX= 57 LY= 1 LZ= 2 IE0= 5 RESAVGE 0.848E+04 RESEQ=-0.110E+06 LX= 1FD= 4 RESAVGE 0.866E+04 RESEQ= 0.955E+05 LX= 57 LY= 1 LZ= 2 IE0= 3 RESAVGE 0.848E+04 RESEQ=-0.110E+06 LX=	
OCHÔN=-0,25671E+00 ** REAVG = 0.866E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 FICD = 1 RESAVG = 0.569E+04 RESEQ = 0.611E+05 LX = 95 LY = 1 LZ = 2 FEQ = 3 RESAVG = 0.663E+04 RESEQ = 0.116E+06 LX = FED = 4 RESAVG = 0.866E+04 RESEQ = 0.955E+05 LX = 57 LY = 1 LZ = 2 FEQ = 5 RESAVG = 0.848E+04 RESEQ = 0.110E+06 LX = TISAV, JCBN = 0.10000E+01-0.14741E=06 DVISAV, JCBN = 0.10000E+01-0.14741E=06 AN VAR(N) DVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/	DT+DVAR+ L1+(DV-DV+
0CHÓR=-0.25671E+00 ◆ REAVG = 0.866E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 1E0= 1 RESAVGE 0.866E+04 RESEQ=-0.611E+05 LX= 95 LY= 1 LZ= 2 IE0= 3 RESAVGE 0.663E+04 RESEQ=-0.116E+06 LX= IFD= 4 RESAVGE 0.866E+04 RESEQ= 0.955E+05 LX= 57 LY= 1 LZ= 2 IE0= 5 RESAVGE 0.848E+04 RESEQ=-0.110E+06 LX= 1FD= 4 RESAVGE 0.866E+04 RESEQ= 0.955E+05 LX= 57 LY= 1 LZ= 2 IE0= 3 RESAVGE 0.848E+04 RESEQ=-0.110E+06 LX=	/DT+DVAR+ L1+(DV-DV+
0CMOM=-0.25671E+00 • REAVG= 0.666E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 IE0= 1 RESAVG= 0.663E+04 RESE0= 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 RESAVG= 0.664E+04 RESE0= 0.651E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 RESAVG= 0.664E+04 RESE0= 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 RESAVG= 0.664E+04 RESE0= 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 RESAVG= 0.664E+04 RESE0= 0.611E+05 LX = 95 LY = 1 LZ = 2 DVISAV+ JCRN= 0.10000E+01-0.14741E-06 DVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/ E0 1 VAR 1 0.25432E+04 0.14332E+00-0.11654E+00-0.29639E+03-0.21750E-01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 3 0.00000E+00 0.43710E+00-0.3257E+00 0.00000E+00-0.21716E+01 0.00000E+00-0.97156E+04-0.11883E+02 0.0 E0 1 VAR 3 0.00000E+00 0.43710E+00-0.3257E+00 0.00000E+00-0.31321E+00-0.40010E+00-0.33072E+05-0.43017E+01-0.1 E0 1 VAR 5 0.00000E+00 0.114332E+00-0.117962E+00 0.00000E+00-0.49904BE+01 0.00000E+00 0.31331E+05-0.43017E+01-0.4 E0 1 VAR 4 0.00000E+00 0.14332E+00-0.11654E+00-0.00000E+00-0.49904BE+01 0.00000E+00 0.31331E+05-0.43017E+01-0.4 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00 0.00000E+00-0.40906E-02 0.00000E+00 0.97535E+05-0.44017E+10.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00 0.00000E+00-0.40906E-02 0.00000E+00 0.97535E+05-0.44017E+10.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00 0.00000E+00 0.43730E+00 0.00000E+00 0.97535E+05-0.44017E+10.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00 0.00000E+00 0.43730E+00 0.0000E+00 0.97535E+05-0.44017E+10.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.316352F+00-0.48774E+00 0.00000E+00 0.97535E+05-0.44017E+10.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.31655E+00 0.04272E+00 0.43732E+00 0.00000E+00 0.97535E+05-0.44017E+01 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.316352F+00-0.48774E+00 0.00000E+00 0.97035E+05-0.44017E+01 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.316352F+00-0.48774E+00 0.00000E+00 0.970355+05-0.018831E+00-0.18622E+00 0.03000E+00 0.97035E+05-0.018831E+00-0.018622E+00 0.03000E+00 0.97035E+05-0.018831E+00-0.18622E+00 0.03000E+00 0.00000E+00 0.97035	/DT+DVAR+ L1+(DV-DV+ 11195E+05-0.56156E+C2 00000E+00-0.21057E+02 00000E+00-0.11057E+02 00000E+00-0.11727E+C3 3E+05-0.19917E+03 00000E+05-0.20962F+03 12235F+05-0.15864E+C3 22405-0.41078E+03 22405-0.41078E+03
0CMOME-0_225671E+00 • REAVG = 0.866E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 IE0= 1 RESAVG = 0.866E+04 RESEQ = 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 RESAVG = 0.866E+04 RESEQ = 0.651E+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.051E+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.051E+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 1 VAR 1 0.25432E+04 0.14332E+00-0.11654E+00-0.29639E+03-0.21750E-01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 3 0.000000E+00 0.43710E+00-0.32527E+00 0.00000E+00-0.21716E=01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 3 0.000000E+00 0.43710E+00-0.32527E+00 0.00000E+00-0.21716E=01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 5 0.00000E+00 0.11320E+00 0.11320E+00 0.10000E+00 0.21057E+05-0.1356E+04-0.11883E+02 0.00 E0 1 VAR 5 0.00000E+00 0.10164E+01-0.16227E+00 0.00000E+00 0.4037E+05-0.01356E+06-0.03307E+05-0.11565E+00 0.01352E+00 0.00000E+00 0.013351E+05-0.013622E+02 0.00 E0 1 ALLX+1/LZ-RES.SPLIT=-0.18601E+03-0.17762E=02 0.00000E+00 0.40757E+05-0.11565E+00-0.44017E+01 0.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.1165E+00 0.3252E+00-0.40752E+00-0.3072E+05-0.11565E+00-0.44017E+01 0.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11527E+00-0.33252E+00-0.3554E=01 0.00000E+00 0.9036E+00-0.43310E+00-0.1 E0 3 VAR 4 0.02384E+00 0.53568E+00 0.013252E+00-0.433255E+00-0.3554E=01 0.00000E+00 0.9036E+00-0.43310E+00-0.3 E0 4 VAR 1 0.00000E+00 0.14332E+00-0.1622F+00 0.00000E+00 0.43554E=01 0.00000E+00 0.13561E+05-0.11863E+00-0.3 E0 4 VAR 1 0.00000E+00 0.43310E+00-0.33554E=01 0.00000E+00 0.43539E+05-0.13531E+05-0.44017E+01 0.0 E0 5 3 ALLX+1/LZ-RES.SPLIT=-0.44017E+01 0.00000E+00 0.45554E=01 0.00000E+00 0.13561E+05-0.44017E+01 0.0 E0 4 VAR 1 0.00000E+00 0.44332E+00-0.00000E+00 0.45555E=00 0.00000E+00 0.4	/DT+DVAR+ L1+(DV-DV+ 11195E+05-0.56156E+C2 00000E+00-0.21057E+02 00000E+00-0.11057E+02 00000E+00-0.11727E+C3 3E+05-0.19917E+03 00000E+05-0.20962F+03 12235F+05-0.15864E+C3 22405-0.41078E+03 22405-0.41078E+03
0CMOME-0_225671E+00 • REAVG = 0.866E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 IE0= 1 RESAVG = 0.866E+04 RESEQ = 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 RESAVG = 0.866E+04 RESEQ = 0.651E+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.051E+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.051E+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESEQ = 0.0116+05 LX = 57 LY = 1 LZ = 2 IE0= 1 VAR 1 0.25432E+04 0.14332E+00-0.11654E+00-0.29639E+03-0.21750E-01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 3 0.000000E+00 0.43710E+00-0.3257E+00 0.00000E+00-0.21716E+01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 3 0.000000E+00 0.43710E+00-0.3257E+00 0.00000E+00-0.21716E+01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 4 0.43132E+03 0.95568E+00 0.111202+00 0.11320E+00 0.131216E+01 0.00000E+00 0.23077E+05-0.13652E+02 0.0000E+00 0.21054E+05-0.13652E+02 0.0000E+00 0.21054E+00-0.02077E+05-0.13507E+05-0.13507E+05-0.13507E+00-0.3077E+05-0.13507E+05-0.13507E+05-0.013507E+05-0.11505E+04-0.11803E+02 0.00 E0 1 VAR 5 0.00000E+00 0.14332E+00-0.11652F+00-0.00000E+00 0.40906E+02 0.00000E+00 0.013131E+05-0.013622E+02 0.00 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00-0.00000E+00 0.0000E+00 0.013531E+05-0.013622E+02 0.00 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00-0.00000E+00 0.0000E+00 0.0131351E+05-0.013622E+02 0.00 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.011652F+00-0.03272E+00-0.03724E+00-0.0000E+00 0.01315351E+05-0.013622E+02 0.00 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11652F+00 0.00000E+00 0.28916E+05-0.31373E+05-0.01362E+00-0.31353E E0 4 VAR 1 0.00000E+00 0.14332E+00-0.11652F+00 0.00000E+00 0.28916E+05-0.31373E+05-0.19817E+04 E0 4 VAR 1 0.00000E+00 0.14332E+00-0.31655E+00 0.00000E+00 0.28916E+05-0.31373E+05-0.44017E+01 0.00 E0 5 VAR 4 0.050000E+00 0.14332E+00-0.31655E+00 0.00000E+00 0.28916E+05-0.31373E+05-0.44017E+01 0.00 E0 6 VAR 4 0.050000E+0	/DT • DVAR • L1 • (DV-DV • 11195E • 05-0 • 56 156E • C2 0000E • 00-0 • 21057E • 02 • 0795E • 03-0 • 46014E • 61 00000E • 00-0 • 11727E • C3 30235E • 05-0 • 19917E • 03 00000E • 00-0 • 67 184E • C1 30235F • 05-0 • 20962F • 03 12235F • 04-0 • 15864F • C3 20000E • 00-0 • 15826E • 02 0000E • 00-0 • 00 • 000E • 000 • 000 • 000E • 000 • 000E • 000 • 000E • 000 • 000E • 000 •
0CMOME-0_25671E+00 • REAVG = 0.866E+04 RESMAX = -0.116E+06 LX = 16 LY = 1 LZ = 2 IE0= 1 RESAVG = 0.866E+04 RESED = 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESED = 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESED = 0.611E+05 LX = 95 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESED = 0.0116E+05 LX = 95 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESED = 0.0116E+05 LX = 95 LY = 1 LZ = 2 IE0= 3 RESAVG = 0.868E+04 RESED = 0.0116E+05 LX = 95 LY = 1 LZ = 2 IE0= 1 VAR 4 0.10000E+01 -0.14741E+06 DVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/D E0 1 VAR 3 0.00000E+00 0.43710E+00-0.32527E+00 0.00000E+00-0.21716E+01 0.00000E+00 0.21054E+05-0.44017E+01-0.1 E0 1 VAR 3 0.00000E+00 0.43710E+00-0.32527E+00 0.00000E+00-0.21716E+01 0.00000E+00 -0.27072E+05-0.43017E+01-0.1 E0 1 VAR 5 0.00000E+00 0.114332E+00-0.11654E+00-0.29639E+03-0.21750E+01 0.00000E+00 0.21054E+05-0.013622E+02 0.0 E0 1 ALX+LYLZ,RESSPLIT=-0.18601E+03-0.17762E+02 0.00000E+00 0.1027E+05-0.13531E+05-0.013622E+02 0.0 E0 1 ALX+LYLZ,RESSPLIT=-0.18601E+03-0.17762E+02 0.00000E+00 0.11578E+05-0.11585E+05-0.013622E+02 0.0 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.11654E+00 0.00000E+00-0.40906E+02 0.00000E+00 0.97535E+05-0.11683E+02-0.3 E0 3 VAR 3 0.253432E+04 0.43710E+00-0.32527E+00-0.42724E+03-0.35540E+01 0.00000E+00 0.97335E+05-0.11883E+02-0.3 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.31525E+00 0.00000E+00 0.31372E+05-0.11883E+02-0.3 E0 3 VAR 4 0.2838E+04 0.43710E+00-0.33527E+00-0.42724E+03-0.35540E+01 0.00000E+00 0.97335E+05-0.11883E+02-0.3 E0 3 VAR 1 0.00000E+00 0.14332E+00-0.31525E+00 0.00000E+00 0.31373E+05-0.1310E+00-0.31452E+00 0.01000E+00 0.23137E+05-0.1310E+00-0.31452E+00 0.01000E+00 0.013137E+00-0.31452E+00 0.01000E+00 0.013137E+00-0.3137E+00-0.31452E+00 0.0000E+00 0.0000E+00 0.01310E+00-0.31452E+00 0.00000E+00 0.01370E+00 0.01310E+00-0.31452E+00 0.00000E+00 0.00000E+00 0.01310E+00-0.31452E+00 0.00000E+00 0.00000E+00 0.013364E+05-0.118632E+00 0.00000E+00 0.013364E+05-0.13452E+00 0.00000E+00 0.00000E+00 0.013364E+05-0.11	$\label{eq:constraints} \begin{array}{ c c c c c c c c c c c c c c c c c c c$
0 CHÓME - 0.25671E + 00 • FRAVG = 0.866E + 04 RESMAX = -0.116E + 06 LX = 16 LY = 1 LZ = 2 IE0 = 1 RESAVG = 0.866E + 04 RESEQ = 0.611E + 05 LX = 95 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 3 RESAVG = 0.866E + 04 RESEQ = 0.955E + 05 LX = 57 LY = 1 LZ = 2 IE0 = 1 VAR 3 0.00000E + 00 0.43710E + 00 - 0.3557E + 00 - 0.29639E + 03 - 0.21736E + 01 0.00000E + 00 - 0.31072E + 05 - 0.43017E + 01 0.00 IE0 = 1 ALLX + 1/LZ - RESS SPL II = 0.1865E + 00 0.0000E + 00 - 0.40964E - 02 0.0000E + 00 0.915057E + 05 - 0.11565E + 06 - 0.4007E + 03 - 0.116037E + 05 - 0.11565E + 06 - 0.4007E + 03 - 0.116037E + 05 - 0.11565E + 00 - 0.32572E + 00 - 0.3072E + 05 - 0.31572E + 05 - 0.3000E + 00 0.9105E + 05 - 0.3157E + 05 - 0.4007E + 03 - 0.116037E + 05 - 0.3157E + 05 - 0.4007E + 03 - 0.116037E + 05 - 0.3157E + 05 - 0.11565E + 00 0.0000E + 00 0.32572E + 00 0.3000E + 00 0.32572E + 00 0.3000E + 00 0.3072E + 05 - 0.31373E + 05 - 0.119A17E + 04 - 0.31452 IE0 4 VAR 1 0.00000E + 00 0.14332E + 00 - 0.11572E + 00 0.0000E + 00 - 0.35554E - 01 0.00000E + 00 - 0.13564E + 05 - 0.11863E + 01 - 0.1252E + 00 0.0000E + 00 - 0.31555E + 00 - 0.00000E + 00 - 0.31555E + 00 - 0.0000E + 00 - 0.13564E + 05 - 0.	$\label{eq:constraints} \begin{array}{ c c c c c c c c c c c c c c c c c c c$

0.7/14/E+00 0.80567E+00 0.23629E+00 0.26027E+00 0.35454E+00 0.58134E+00 0.681412E+00 0.84334E+00 0.94482E+00 0.45709E+00

	8179 9421 A(LL	06.4	0 0 0 0	0.9	130	83E 89E	+00)•8)•9	44 58	54f 19E	-+ (+ (00	°:	96	58	261	E + E +	00	0	• 9	171	93	BE	+ 0 + 0	Ó	0.	88 97	32		Ë+ E+	00	Ŏ		<u></u> 97	75	55 931	Ë + Ë +	00	Õ	Ô.	9	10	3	4Ē 2E	+0	Õ	Ŏ	9	21	94 67	Ē		2	8:	9	32	65 13	SE.	+ 0 + 0	0								
	134266 33357 33557 8410 35577 411357 1799 11357 1996 11357 1996 100 1996 100 1996 100 1996 100 1996 100 1996 100 1996 100 1996 100 100 100 100 100 100 100 100 100 10	172265474963E	03 03 03 03 01 01 02 02 02 02 02		41 37 35 17 10 10 10 10 10 10 10 10 10 10 10 10 10	90E 93E 93E 93E 93E 93E 93E 88E 93E 88E 93E 88E 90E 90E 90E 90E	-00000000000000000000000000000000000000		33332541242	437557888482	24:18		333333113322	000000000000000000000000000000000000000	33322141262		631 981 981 981 981 981 981 971 971 971		033330011322	000000000000000000000000000000000000000					000000000000000000000000000000000000000	33333011322	0	3331182011161	96576930624			03333311322	000000000000000000000000000000000000000		333325721961	96577041444			000000000000000000000000000000000000000	33333111322	000000000000000000000000000000000000000	3331172116	333322200311	6277886856	75165408234		333322111222	000000000000000000000000000000000000000	3331471414	33334492600	306252904163		000000000000000000000000000000000000000	333311122222	000000000000	3331471314	333376918981	98975701665			333111322								
	1210 1466 1477 2719 1271	522++ 322++ 122++ 1222+++ 1222++++ 1222++++ 1222++++ 1222++++ 1222+++++ 1222++++++++	COOCOCOCOCOCOCOCOCOCOCOCOCOCOCOCOCOCOC	00000000000000000000000000000000000000	22 53 55 55 55 55 52 52 52 52 52 52 52 52 52	5188899375888992884	*0 *0 *0 *0 *0 *0 *0 *0 *0 *0 *0 *0 *0 *		• 1 0 • 1 37 0 • 1 37 0 • 1 7 2 1 1 0 • 1 1 0 0 • 1 1 0 0 • 1 1 0 0 • 1 1 0 0 • 1 1 0 0 • 1 1 0 0 • 1 1 0 0 • 1 0 0 0 0	33418636392=	111 30 46 16 98 16 16 98 16 16 16 16 16 16 16 16 16 16			0000000000	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		22471255545816581658165816581658165816581658165816	10000000000000000000000000000000000000	022233222222 000000000 0000000000000000			35051873111		DEEEEEEEEEEEEEEE	************	100000000000000000000000000000000000000			284581581581	19951 500 799 100 100			000000000000000000000000000000000000000		15218441705221111111111111111111111111111111111	974	13 13 13 13 13 13 13 13 13 13 13 13 13 1	EEEEEEEEEEEV • • • • • • • • • • • • • • • • • • •	000000000000000000000000000000000000000	222233222222	000000000000000000000000000000000000000	111411511114	529950523118	5489347187	1EEEEEEEEEEEEEEEEEEEEEEEEEEEEEEEEEEEEE	+	22223322222	000000000000000000000000000000000000000	1125115111	52518504381	26849055732		000000000000000000000000000000000000000	20223322222	000000000000000000000000000000000000000	1 2 5 1 9 4 1 1 1	5243364261	615659400 7959400		******	222232222								
J ••	• F0	RCE	C O	EFF	• 1 C	IEM	ITS	•	• •																																																												
FRC	Z =	-0.	591	0.8 F	. + 0		ITS		• • R C X	=	. 1	0.	169	923	SE-	• 0	1			FR	101	4	= .	- 0	•5	91	08	E+	• 0 (0 F :	RC	=		0	• 1	69	92	36	:•(01																													
		-0. 1.26 VG RE	591 141 SAV SAV	086 5 + 0 6 = 6 =	+0 00 09 09	0 E+(909)4)E +	F	RCX RES RE	MA SE SE	X = 0 = 74	- 0	.1	1586 886	5 B +	E + 06 05	• •	X = X =	× 55	= 7	Ľ	57 (= (=		Y 1 1	Ēz	=		ιz		= 0 0	=	~	RE	E S S	A \ A \	G		0.		0 8 0 0	Ē					E)=-						5 1													32	-0		
FRO 0CM0 1E DT1 E0 E0 E0 E0	Z = M = -0 REA Q = 1 0 = 4	-0. 26 VG RE JC RE JC	591 141 = SAV SAV BN= 00 00	086 5 • 0 6 = 0 6 = 0 4 N • 20	+0 009 009 009 009 009 009 009 0	0 E+0 90 29 62 3E 4 0E 1E 1E 1E 1E 1E 1E 1E 1E 1E 1	04 04 00 00 00 00	F F	RCX RES RE- 0.R • 26 • 110	MA SE 14 (N 78 18 72	X == 4 Q74 2391	= -0 1E -0 +0	0 -1 -0 -0 1-1	1586 86 DV	A1	E + 06 05 R (1 89	06 L N + 7EEE	X= 1) 	× 55	= 777		57 (=) T 	+D1 931 001	Y 1 V A E E E E E	= LZ R 0002	==	1 2 L1	• D 02 08 98		E Q A R B E E	== 000	235 331	RR L 000	2 000	A V A V • C 0 C 0 C			•••	00	0800		3• 91 79 79	DV 47 71	/A /0 7 8	R E+ E+	0	5-1	D 	VA 53 69	R (73 48	+) 3E 5E 8E	+ (0000	A .	/D	T + 09 00 51	0 V 9 E 0 E 5 E	/ A	R 4 0 4 0 2 0 2		C	1	+ (87 56 28 10	D 9848	- V- 5818 988	= E+ E+	· 0 0	
FRC 0C 1 E DT 1 EE000 C EE000 C EE000 C EE000 C	Z = M = -0 R E A Q = 1 Q = 4 S A V • 1 VA 1 VA 1 VA	-0.6 REC REC REC REC REC REC REC REC REC REC	591 141 SAV SAV NN= 000 00 •LY 0000	086 5 + (0 9 = 9 =	+0 50 50 50 50 50 50 50 50 50 5	0 E + (0 99926 3010E 0 3010E 0 38E 0 38E 0	04 04 04 04 00 00 00 00 00 00	F F F F F F F F F F F F F F F F F F F	RCX RES PO-R VAR -04 -110 -110 -110 -110 -110 -110 -110	MAESE SEA 14 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 17 18 18 19 19 19 19 19 19 19 19 19 19 19 19 19	XQQ7) 23910 23910 23910	= 0 -1E -++00 ++00 ++00 ++00	0 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	1586 586 586 586 50 50 50 50 50 50 50 50 50 50 50 50 50	A1	E+ 06 05 R(1 05 05 01 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	- 06LL + 73043 7304	xx 18	x 55 1-1 11 10 1-1 1-1	= 77		57 7= 01 00 00 00 00 00 00 00 00 00 00 00 00	+01 931 001 341 001 -01 701	Y11 A ++++0 ++++	= ZZ R 000200 00200 00320	== 0000+ c000	1 22 L1 •6 •3 00 •1	LZ • 028860 • 1255		E Q R E E E C 2311	== 000000000000000000000000000000000000	235 33123 3101	RR 0000+ 0000		AV • 0 0 0 0 0 0 0 0 0 0 0 0 0 0					0800 -000 E 0000	L	3 · 17977	DV 171270 861 81	107894	R + + + + + + + + + + + + + + + + + + +	0.000	-	D	VA 53 69 11 51 51 53 53 69	R (73 48 57 21 73 48	+) 3584 3584 3584	***			A	D 24000000000000000000000000000000000000	T * 09051 5100 * 0 001600	0 V 9 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	A ++ ++ O ++++	R 4 00202		0	1 12153 2341	* 07680 5280 1329 74	D 98480 0056	- V - 50000 51000 1 70000	= + = + = + = + = + = + = + = + = + = +	01 00 01 01	
PC + 111 D ELEELE ELEELE ELEELE	Z = 0 M = E A Q = A A A A A A A A A A A A A A A A A A A	-0.66 N-0.67 N-0	591141 = SAV SAV 00 00 0 + L Y 00 00 00 0 0 0 0 0 0 0 0 0 0 0 0 0	0860 0950 0950 0950 0950 0950 0950 0950 09		0 + 09926 BEEEEE 0380E 00220	14 ++++++++++++++++++++++++++++++++++++		R R R R R R R R R R R R R R R R R R R	MAESEAN SEEAN 7882100 7882100 7882100 7882100 7882100 7882100 7882100 7882100 7882000000000000000000000000000000000	XQQ7) 23910 23911 2391 23910 25558 2555		0 -1 -0 1 -1 -1 -1 -1 -1 -1 -1 -1 -1	125888 V 5888 V 5988 V 599 V 590 V 500 V 50	581 + 1 501 12 50 12 50 10 50 10 50 10 50 10 50 10 50 10 50 10 50 10 50 10 50 10 50 10 50 10 50 10 10 50 10 10 10 10 10 10 10 10 10 10 10 10 10	E 6 6 5 (1 1990 - 1990	- 6LL + EEEE6 EEEE3 EEEE	xx 183	x 55 1-1110 1-15 11115 1111			57 T = 0 50 0 0 0 0 0 0 0 0 0 0 0 0 0	+ 0 9 31 0 0 0 1 3 4 1 0 0 0 1 7 0 0 1 7 0 0 1 7 0 0 1 7 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Y11 V EEEEO EEEEO EEEE	= ZZ R 200200 03200 00030	== 0000+ 0000+ 0000	1 22 L 1 463300	L Z 0 28860 1255 0 8920		200 R EEEEO EEEES EEEE	== 00008 00004 0000	235 33123 31015 3120	RR 0000+ 0000+ 000		AA + 00000 00000 00000					000 0000 + 0000 + 0000 + 0000		3 19997 5 2326 - 8422	D 17126 8117 8949	A 07894 77972 004	R EEEE6 EEEE1 EEE	00003			VA 539111 53 591151 591151 5911	R (7348721 74872 74872 74872 74872 7487	+) 35854 35854 35854 35854 35854 35854 35854			- 0000 - 0000 9 0000	A	/D 4003100E 001100 0001100	T * 090 500 500 500 500 500 500 500 500 500	0 90504 03204 00000		R 40000 004701 00000		00000 00002 0000	1 12153 23415 1940	+ 8521E 1437E 9580	D 98480 00560 2710	- V 51981 74602 (420		01 00 01 01 01 01 02 01	

EG 5 VAR 1 0.00000F+00 0.26782E-01-0.12017E-01 0.00000E+00 0.29387E-03 0.00000E+00 0.26175E+94 0.53733F+00 0.00000E+00 0.16F14E+01 EG 5 VAR 3 0.00000E+00 0.11183E+00-0.53893E-01 0.00000E+00 0.31111E-01 0.00000E+00 0.31713E+04-0.69485E+00 0.00000E+00-0.84571E+01 EG 5 VAR 4 0.00829E+04 0.10729E+01 0.50090E-01 0.3195E+03 0.25467E-12 0.00000E+00 0.3781RE+02 0.11578E+02 0.00000E+00-0.84571E+01 EG 5 VAR 5 0.2054E+04 0.80729E+01 0.50090E-01 0.3195E+03 0.25467E-12 0.00000E+00 0.16282E+04-0.51214E+02 0.11578E+02 0.152017E+03 EG 5 VAR 5 0.2054E+04 0.8841E+00-0.17104E-01-0.54797E+02 0.37764F-03 0.00000E+00 0.16282E+04-0.51214E+0.51214E+00-0.15007E+0-1.510207E+01 EG 5 A+LX+LY+LZ+RES+SPL1T= 0.26475E+03 0.34339E-01 0.00000E+00 0.11072E+04-0.90200E+03-0.59473E+02 0.90214E+03-0.81283E+01

DENSITY

ENTHALPY TEMP

MERAC

CР

0.96162E+00 0.96508E+00 0.96481E+00 0.96628F+00 0.96800F+00 0.97032E+00 0.97477E+00 0.97980E+00 0.98522E+00 0.99239E+00 0.1017E+01 0.10125E+01 0.10259E+01 0.10259E+01 0.10589E+01 0.1079CE+01 0.1011E+01 0.11248E+01 0.11508E+01 0.11772E+01 0.12328E+01 0.13330E+01 0.13330E+01 0.12528E+01 0.12528E+01 0.12528E+01 0.13330E+01 0.13330E+01 0.13339E+01 0.13339E+01 0.13339E+01 0.13339E+01 0.13339E+01 0.13339E+01 0.13339E+01 0.15528E+01 0.15538E+01 0.15538E+00 0.86558E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.865578E+00 0.867578E+00 0.867578E+00 0.867578E+00 0.87558E+00 0.875785E+00 0.

Table VII. (cont)

L7

JPWL(LLX)

Z

U-VEL

UPSTREAM TOTAL PRESSURE - LX.PDUM 58

V-VEL

W-VEL

0.1253063158E+01

0.-9779747-00 0.-977977-00 0.977977-00 0.977976-00 0.977977-00 0.977977-00 0.977977-00 0.979971-00 0.9 0 *** FORCE COEFFICIENTS *** D *** FURLE COLLECT FRCZ = 0.64854F*00 FRCX = 0.18260E*01 FRCN = -0.664864E*UUFRL - C-----OCMOM=-0.289115*00 ** REAVG = 0.160E*04 RESEQ = 0.3386*05 LX = 57 LY = 1 LZ = 3 IEQ = 1 RESAVG = 0.107E*05 LX = 56 LY = 1 LZ = 3 IEQ = 1 RESAVG = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*03 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*03 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*03 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*03 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*03 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*03 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 4 RESAVG = 0.69DE*04 RESEQ = 0.807E*04 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.771E*03 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.697E*04 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ = 5 RESAVG = 0.697E*04 RESEQ = 0.107E*05 LX = 57 LY = 1 LZ = 3 IEQ DVAR(+) A/DT+DVAR+ L1+(DV-DV+ EQ 1 VAR 1 0.30108E+04 0.14766E-01-0.19912E-02-0.14637E+02 0.74594E-04 0.00000E+00-0.19611E+02 0.30651E-01 0.22530E+03 0.50701E-01 EQ 1 VAR 3 0.00000E+00 0.57941E-01-0.11827E-01 0.0000E+00 0.89937E-04 0.00000E+00-0.70827E+02-0.30255E-01 0.00000E+00-0.66743E-02 EQ 1 VAR 4 0.96076E+02 0.11230E+01 0.10024E-01 0.23513E+01 0.01000E+00-0.2173E+04 0.32628E-01 0.76537E+01 0.1861E+00 EQ 1 VAR 5 0.00000E+00 0.86700E+00-0.38745E-02 0.0000E+00-0.21357E+01 0.23628E-01 0.76537E+01 0.32628E-01 0.76537E+01 0.1861E+00 EQ 1 VAR 5 0.00000E+00 0.86700E+00-0.38745E-02 0.00000E+00-0.21355E+01 0.20537E+04-0.28227E-01 0.76337E+01 0.4861E+00 E0= 1 A,LX,LY,LZ,RES,SPLIT=-0.12285E+02 0.61443E-02 0.00000E+00-0.21055E+03 0.23293E+03 0.34674E+02 E0 3 VAR 1 0.00000E+00 0.14766E-01-0.19912E-02 0.00000E+00 0.24082E-04 0.00000E+00 0.10514E+03 0.30651E-01 0.00000E+00 0.69681E-02 E0 3 VAR 3 0.30108E+04 0.57941E-01-0.11827E-01-0.86935E+02 0.14432E-02 0.00000E+00-0.30381E+02-0.30255E-01-0.22239F+03-0.80919E-01 E0 3 VAR 4 0.36962E+03 0.11230E+01 0.10024E-01 0.90457E+01 0.24305E-01 0.00000E+00 0.62466E+03 0.32628E-01 0.22439E+03-0.80919E-01 E0 3 VAR 5 0.00000E+00 0.86700E+00 0.38745E+02 0.00005E+00-0.3885E-02 0.0000E+00-0.5029F+33-0.28227E-01 0.2000E+00 0.62765E+00 E0 3 VAR 5 0.00000E+00 0.86700E+00 0.38745E+02 0.00005E+00-0.3885E-02 0.0000E+00-0.5029F+33-0.28227E-01 0.0000E+00-0.10435E+01 E0 3 VAR 5 0.00000E+00 0.86700E+00 0.38745E+02 0.00000E+00-0.3858E-02 0.0000E+00-0.5039F+31 -0.19295E+03-0.48659E+00 EQ 4 VAR 1 0.00000E+00 0.14766E-01-0.19912E-02 0.00000E+00 0.10232E-03 0.00000E+00 0.66823E+03 0.30651E-01 0.00000E+00 0.11979E+00 EQ 4 VAR 3 0.00000E+00 0.57941E-01-0.11027E-01 0.00000E+00 0.64928E-02 0.00000E+00-0.99578E+03-0.30255F-01 0.00000E+00-0.44565E+60 EQ 4 VAR 4 0.65012E+04 0.11230E+01 0.1024E-01 0.15910E+03 0.56776E-03 0.00000E+00 0.62430E+01 0.32628E-01 0.51787E+03 0.38256E-01 EQ 4 VAR 5 0.00000E+00 0.86700E+00-0.3745E-02 0.00000E+00 0.0000E+00 0.0000E+00 0.28227E-01 0.0000E+00 0.80250E EQ 4 VAR 5 0.00000E+00 0.86700E+00-0.3745E-02 0.00000E+00 0.0000E+00 0.0000E+00 0.37446E+02 0.51787E+03-0.28760F+00 E0 5 VAR 1 0.00000E+00 0.14766E-01-0.19912E-02 0.00000E+00 0.18*57E-03 0.00000E+00 0.59212E+03 0.30651E-01 0.00000E+00 0.10404E+00 E0 5 VAR 3 0.00000E+00 0.57941E-01-0.11827E-01 0.00000E+00 0.75235E-02 0.00000E+00-0.88237E+03-0.30255E-01 0.00000E+00-0.3047AE+00 E0 5 VAR 4 0.40029E+04 0.11230E+01 0.10024E-01 0.97963E+02 0.19677E-03 0.00000E+00 0.*6634F+01 0.32626E-01 0.31886E+03 0.11470E-01 E0 5 VAR 5 0.21507E+04 0.86700E+00-0.3745E+02-0.20344E+02 0.48214E=04 0.0000E+00 0.20221F+03-0.28227E-01-0.41421E+03-0.44905E-01 E0 5 VAR 5 0.415507E+04 0.86700E+00-0.3745E+02 0.48214E=04 0.0000E+00 0.20221F+03-0.28227E-01-0.41421E+03-0.44905E-01 E0 5 A+LX+LY+LZ+RES+SPLIT= 0.77619E+02 0.79520E-02 0.00000E+00-0.76380E+02 0.17063E+03 0.16636E+02 0.17065E+03-0.31417E+00 ENTHALPY TEMP MERAC CP LZ Z U-VEL V-VEL V-VEL DENSITY UPSTREAM TOTAL PRESSURE - LX+PDUM 58 0+1264061451E+01

0PUL(LLX) 0.98124E+00 0.97917E+00 0.97684E+00 0.97446E+00 0.97153E+00 0.97333E+00 0.98544E+00 0.97426E+00 0.94452E+00 0.93795E+00 0.95124E+00 0.91694E+00 0.65377E+00 0.974655+00 0.97153E+00 0.97037E+00 0.97886E+00 0.97426E+00 0.95207E+00 0.96345E+00 0.95617E+00 0.97347E+00 0.9740E+00 0.974655+00 0.97153E+00 0.96107E+00 0.97886E+00 0.9776E+00 0.9024E+01 0.1024E+01 0.10242E+01 0.1042E+01 0.10555+01 0.10791E+01 0.10791E+01 0.10242E+01 0.13657E+01 0.13627E+01 0.13677E+01 0.12672E+01 0.13772E+01 0.12869E+01 0.110555+01 0.13254+01 0.10791E+01 0.1366E+01 0.13627E+01 0.13677E+01 0.13677E+01 0.13677E+01 0.13772E+01 0.13697E+01 0.14196E+01 0.15565+01 0.1556E+01 0.1556E+01 0.13208E+01 0.1474E+01 0.14672E+01 0.14677E+01 0.15776E+01 0.14218F+01 0.14196E+01 0.13797E+01 0.15786E+01 0.15786E+01 0.15202E+01 0.14208E+01 0.14672E+01 0.14677E+01 0.15776E+01 0.14218F+01 0.14799E+01 0.13797E+01 0.15786E+01 0.15786E+01 0.15202E+01 0.14672E+00 0.9887E+01 0.14672E+00 0.15776E+01 0.14218F+01 0.1479E+01 0.15602E+01 0.15786E+01 0.15786E+01 0.15202E+01 0.14785E+00 0.46872E+00 0.46872E+00 0.15776E+01 0.14218F+01 0.1479E+01 0.15786E+01 0.15786E+01 0.15786E+01 0.15775E+00 0.97857E+00 0.46872E+00 0.46872E+00 0.46872E+00 0.17876E+01 0.14218F+01 0.1577E+01 0.15786E+00 0.777674E+00 0.97735E+00 0.78572E+00 0.78572E+00 0.46872E+00 0.46872E+00 0.17876E+00 0.46872E+00 0.46852E+00 0.77864E+00 0.77874E+00 0.798512E+00 0.78572E+00 0.79857E+00 0.46873E+00 0.46888E+00 0.46888E+0
0.342612-03 0.34190E-03 0.34124F-03 0.34063E-03 0.34007E-03 0.33956E-03 0.33956E-03 0.33867F-03 0.338305E-03 0.33796E-03 0.33767E-03 0.33741E-03 0.33741E-03 0.33698E-03 0.33694E-03 0.33956E-03 0.33650E-03 0.33867F-03 0.338305E-03 0.33796E-03 0.33767E-03 0.33594E-03 0.33598E-03 0.33598E-03 0.33684E-03 0.33956E-03 0.33650E-03 0.338305E-03 0.338305E-03 0.33805E-03 0.33796E-03 0.33598E-03 0.33598E-03 0.33598E-03 0.33589E-03 0.31684E-03 0.51427E-03 0.514786E-03 0.51431E-03 0.51431E-03 0.32792E-03 0.33593E-03 0.33598E-03 0.21792E-03 0.21786E-03 0.21824E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21792E-03 0.21824E-03 0.21824E-03 0.31507E-03 0.21786E-03 0.21786E-03 0.463564F-01 0.72458E-01 0.77748E-01 0.197455+00 0.11848E+00 0.12647E+00 0.13140E+00 0.13577F+00 0.14056F+00 0.132480E-01 0.463564F-01 0.77245E-01 0.77221E-01 0.452721E-01 0.40042E-01 0.28038E-01 0.35737E+00 0.13577F+00 0.14056F+00 0.132480E-01 0.40556F+00 0.287556E-01 0.227382F-01 0.27264E-01 0.26362E-01 0.25003E-01 0.35767E+00 0.13578F+00 0.13578F+00 0.77159E-01 0.277116E-02 0.40820E-02 0.40797E-02 0.40804E-02 0.40801E-02 0.40812E-02 0.40819E-02 0.40836F+00 0.18965E-02 0.27165E-02 0.271190F-02 0.40820E-02 0.407974E-02 0.40803E-02 0.40812E-02 0.40812E-02 0.40819E-02 0.40836E-02 0.212153E-02 0.27166E-02 0.27116E-02 0.408234E-03 0.522503E-03 0.522503E-03 0.52811E-03 0.52933E-03 0.34273F-03 0.34273F-02 0.27166E-02 0.27116E-02 0.408234E-03 0.522503E-03 0.52503E-03 0.52811E-03 0.52933E-03 0.34273F-03 0.34273F-03 0.20264E-02 0.79952E-03 0.380234E-03 0.522503E-03 0.522503E-03 0.52811E-03 0.52933E-03 0.34273F-03 0.34274F-03 0.2027166E-02 0.27116E-02 0.408234E-03 0.522503E-03 0.522503E-03 0.52811E-03 0.52933E-03 0.34273F-03 0.34274F-03 0.2208E-02 0.79952E-03 0.380234E-03 0.522503E-03 0.522503E-03 0.528511E-03 0.52933E-03 0.34273F-03 0.34274F-03 0.322654E-02 0.79952E-03 0.340234E-03 0.522503E-03 0.522503E-03 0.528511E-03 0.52933E-03 0.34273F-03 0.34274F-03 0.2208E-02 0.79952E-03 0.340234E-03 0.522503E-03 0.522503E-03 0.528511E-
C. 73563E+01 0.73981E+01 0.74387E+01 0.74916E+01 0.75931E+01 0.76990E+01 0.87648E+01 0.85193E+01 0.76176E+01 0.7702E+01 0.491246E+01 0.49834E+01 0.42530E+01 0.37799+01 0.38742E+01 0.39222E+01 0.51719E+01 0.78158E+01 0.957376E+01 0.92120F+01 0.491246E+01 0.49845E+01 0.46545E+01 0.84619E+01 0.83053E+01 0.82056E+01 0.82430E+01 0.84073E+01 0.95507E+01 0.80506E+01 0.491246E+01 0.49621E+01 0.46545E+01 0.84619E+01 0.83053E+01 0.82056E+01 0.82430E+01 0.84073E+01 0.95507E+01 0.82507E+01 0.40539E+02 0.417012E+02 0.17305E+02 0.17542E+02 0.18060E+02 0.18756E+02 0.1913E+02 0.14552E+02 0.19573E+02 0.19343E+02 0.40279E+02 0.4058E+02 0.20653E+02 0.435412E+02 0.44571E+02 0.44159E+02 0.43346E+02 0.45502E+02 0.465351E+02 0.4586E+02 0.44058E+02 0.44058E+02 0.44571E+02 0.44058E+02 0.44571E+02 0.44058E+02 0.44571E+02 0.44058E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.43566E+02 0.43157E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4586E+02 0.4576E+02 0.4576E+01 0.5576E+02 0.4576E+02 0.4576E+01 0.45776E+01 0.45706E+01 0.45776E+01 0.45776E+01 0.45776E+01 0.45776E+01 0.45706E+01 0.45706E+01 0.45706E+01 0.45706E+01 0.45706E+01 0.45706E+01 0.45706E+01 0.457176E+01 0.457176E+01 0.45706E+01 0.4500E+01
······································
0 *** FORCE COEFFICIENTS *** _FRC7_=0.677975.00 FRCX = 0.18809E*01 FRCN = -0.67797E+00FRC = 0.18809E+01
OCHOM=-0.304895+00 * REAVG = 0.554E+03 RESMAX = -0.114E+05 LX = 57 LY = 1 LZ = 2 IE0 = 1 RESAVG = 0.554E+03 RESEQ = 0.114E+05 LX = 57 LY = 1 LZ = 2 IE0 = 4 RESAVG = 0.554E+03 RESEQ = 0.473E+04 LX = 57 LY = 1 LZ = 2 IE0 = 4 RESAVG = 0.481E+03 RESEQ = 0.473E+04 LX = 58 LY = 1 LZ = 2 DTISAV, JCRN = 0.38147E+01-14741E-06 DVAR(N) DVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR + 1+(DV-DV+
E0 1 VAR 1 0.30389E+04 0.12774E-01-0.11092E-02-0.12859E+02 0.14394E-04 0.00000E+00 0.20339E+02 0.13735E-02 0.15922E+02 0.21392E-02 E0 1 VAR 3 0.00000E+00 0.46114E-01-0.47412E-02 0.0000E+00 0.28421E-04 0.00000E+00 0.20379E+02-0.70820E-02 0.00000E+00-0.13665E-02 E0 1 VAR 4 0.83264E+02 0.11330E+01 0.33247E-02 0.10560E+01 0.31363E-02 0.00000E+00-0.93666E+03 0.67271E-02 0.21367E+01 0.15292E-01 E0 1 VAR 4 0.83264E+02 0.11330E+01 0.33247E-02 0.10560E+01 0.31363E-02 0.00000E+00-0.93666E+03 0.67271E-02 0.21367E+01 0.15292E-01 E0 1 VAR 5 0.00000E+00 0.86313E+00-0.14350E-02 0.00000E+00-0.45660E-03 0.00000E+00-0.91150E+03-0.47509E-02 0.20367E+01 0.55292E-01 E0 1 VAR 5 0.00000E+00 0.86313E+00-0.14350E-02 0.00000E+00-0.45660E-03 0.00000E+00-0.47509E-02 0.00000E+00-0.51150E+03-0.47509E-02 0.00000E+00-0.51150E+01 0.118059E+02-0.5745E-01
E0 3 VAR 1 0.00000E+00 0.12774E-01-0.11092E-02 0.00000E+00 0.57103E-05 0.00000E+00 0.39622E+02 0.13735E-02 0.00000E+00 0.23959E-03 E0 3 VAR 3 0.30389E+04 0.46114E-01-0.47412E-02-0.554961E+02 0.45633E-03 0.00000E+00-0.2127E+92-0.70620E-02-0.82097E+02-0.15205E-01 E0 3 VAR 4 0.29447E+03 0.11330E+01 0.33247E-02 0.37347E+01 0.10715E-01 0.00000E+00 0.26895E+03-0.47509E-02-0.82097E+02-0.15205E-01 E0 3 VAR 4 0.29447E+03 0.41330E+01 0.33247E-02 0.37347E+01 0.10715E-01 0.00000E+00 0.26895E+03-0.47509E-02-0.7566E+01 0.52265E-01 E0 3 VAR 5 0.000000E+00 0.86313E+00-0.14350E+02 0.00000E+00 0.25895E+02-0.74555E+03-0.47509E-02 0.00000E+00-0.77766E+00 E0 3 A.LX+LY+LZ+RES+SPL1T=0.51226E+02 0.96163E-02 0.00000E+00 0.23896E+02-0.74555E+02 0.5710E+00 -0.74564E+00
E0 4 VAR 1 0.00000E+00 0.12774E-01-0.11092E-02 0.00000E+00-0.48907E-04 0.00000E+00 0.34239E+03 0.13735E-02 0.00000E+00 0.50133E-02 E0 4 VAR 3 0.00000E+00 0.46114E-01-0.47412E-02 0.00000E+00 0.25697E-02 0.00000E+00-0.41660E+03-0.70820E-02 C.00000E+00-0.1064RE+00 E0 4 VAR 4 0.65012E04 0.11330E+01 0.33247E-02 0.82452E+02 0.22715E-03 0.00000E+00 0.89362E+00 0.67271E-02 0.16683E+03 0.26253E-02 E0 4 VAR 5 0.00000E+00 0.86313E+00-0.14350E-02 0.00000E+00 0.0000E+00 0.0000E+00 0.67271E-02 0.16683E+03 0.26253E-02 E0 4 VAR 5 0.00000E+00 0.86313E+00-0.14350E-02 0.00000E+00 0.00000E+00 0.00000E+00 0.67271E-02 0.16693E+03 0.1000E+00 E0 4 ALX4LY4LZ4RES4SPLITE 0.82452E+02 0.27480F-02 0.00000E+00-0.73518E+02 0.16693E+03 0.10860F+02 0.16693F+03-0.98837E-01

EQ 5 VAR 1 0.00000E+00 0.12774E-01-0.11092E-02 0.00000E+00 0.12765E-04 0.00000E+10 0.30098E+03 0.13735E-02 0.00000E+00 0.43873E-02 EQ 5 VAR 3 0.00000E+00 0.46114E-01-0.47412E-02 0.00000E+00 0.30044E-02 0.00000E+00-0.36639E+03-0.70820E-02 0.00000E+00-0.91266E-01 EQ 5 VAR 4 0.39488E+04 0.11330E+01 0.33247F-22 0.50337E+02 0.93133E-04 0.00000E+10 0.45770E+02-0.20000E+00-0.91266E-01 EQ 5 VAR 5 0.21708E+04 0.16313E+00-0.14350E-02-0.11883E+02 0.1195E-04 0.00000E+10 0.45700E+02-0.47509F+02-0.39342E+02-0.61085F-02 EQ 5 A.LX.LY.LZ.RES.SPLIT= 0.38655E+02 0.31223E-02 0.0000CE+00-0.19105E+02 0.62910E+02 0.51535E+01 0.62914E+02-0.92135E-01

DENSITY

ENTHALPY

TEMP

MFRAC

CP

Table VII. (cont)

ι7

Z

U-VEL

V-VEL

V-VEL

0.1275059744E+01 UPSTREAM TOTAL PRESSURE - LX+PDUM 58

0.93130E.000 0.81925E.00 0.97162E.000 0.97520E.00 0.1053JE.01 0.10509E.01 0.12719F.01 0.12969F.01 0.15F87E.01 0.13725E.01 0.15F87E.01 0.1581IE.01 0.147493E.01 0.14726E.01 0.81559E.00 0.79569E.00 0.83532E.00 0.84735E.00 0.9571F.00 0.96715E.00	0.656262.400 0.974891E.40 0.976025.400 0.974891E.40 0.131657.431 0.133195.40 0.131657.431 0.133195.40 0.15691E.401 0.153197.40 0.140355.401 0.134315.40 0.109445.401 0.134315.40 0.109445.401 0.135225.00 0.863975.400 0.878975.40 0.977395.400 0.87825.40	0 0.982251*00 0.984601 1 0.11116401 0.1135940 1 0.1525401 0.1135940 1 0.1525401 0.11359040 1 0.1525401 0.159094 1 0.159094 1 0.13613401 0.13409541 0 .13613401 0.13409541 0 .778276400 0.78179540 0 .892526400 0.90557640 0 .981258400 0.9836554	00 0.98509E+00 0.98547E+0	$\begin{array}{c} 0 & \cdot & 0 & 1 & 0 & 0 & \cdot & 0 & 0 & \cdot & 1 & 0 & 2 & 1 & 9 & \varepsilon & 0 \\ 0 & \cdot & 1 & 2 & 1 & 2 & \varepsilon & 0 & 1 & 0 & \cdot & 1 & 2 & s & 2 & \varepsilon & \varepsilon & 1 \\ 0 & \cdot & 1 & 3 & 9 & 4 & 0 & \varepsilon & s & 0 & 0 & 0 & 1 & 1 & 2 & 5 & 2 & \varepsilon & \varepsilon & 1 \\ 0 & \cdot & 1 & \varepsilon & 1 & 0 & \cdot & 1 & 4 & 2 & 5 & \varepsilon & 0 & 1 \\ 0 & \cdot & 1 & 2 & 0 & 0 & \varepsilon & 0 & 0 & 0 & 1 & 1 & 2 & 5 & \varepsilon & 0 & 1 \\ 0 & \cdot & 1 & 2 & 7 & 0 & 7 & \varepsilon & 0 & 0 & 0 & 0 & 1 & 0 & 2 & 5 & 0 & 1 \\ 0 & \cdot & 1 & 2 & 7 & 0 & 7 & \varepsilon & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$
000174(LLX) 0.34561E-03 0.34190E-03 0.33767E-03 0.33564E-03 0.51433E-03 0.33564E-03 0.51433E-03 0.33564E-03 0.51433E-03 0.221788E-03 0.12173E-02 0.92259E-01 0.30227E-01 0.229554E-01 0.30254E-03 0.28617E-03 0.20154E-03 0.28617E-03	0.34124E-03 0.34063E-0 0.33718E-03 0.33698E-0 0.33593E-03 0.33598E-0 0.33593E-03 0.33598E-0 0.21792E-03 0.32593E-0 0.99528E-01 0.19745E-0 0.77021E-01 0.75291E-0 0.28332E-01 0.75291E-0 0.28332E-01 0.2727245E 0.26497E-03 0.22801E-C 0.040820E-02 0.407252	3 0.34007E-03 0.33956E- 3 0.33684E-03 0.33668E- 3 0.33589E-03 0.51427E- 3 0.33599E-03 0.21786E- 3 0.23599E-03 0.21786E- 10 0.21623E-00 0.12647E+ 10 0.26367E-01 0.25609E- 13 0.22051E-03 0.11862E- 2 0.48084E-22 0.49895E- 2 0.48084E-22 0.49895E- 14 0.48084E-22 0.49895E- 15 0.48084E- 15 0.48084E-22 0.49895E- 0.48084E-22 0.49895E- 0.48084E-22 0.49895E- 0.48085E- 0.	$\begin{array}{c} 0.3 & 0.33909 \pm 0.3 & 0.33867 \pm 0.0 \\ 0.3 & 0.33650 \pm -0.3 & 0.33697 \pm 0.0 \\ 0.3 & 0.53429 \pm -0.3 & 0.31430 \pm -0 \\ 0.3 & 0.53429 \pm -0.3 & 0.51430 \pm -0 \\ 0.3 & 0.33707 \pm -0.3 & 0.33731 \pm -0 \\ 0.0 & 0.33707 \pm -0.3 & 0.33731 \pm -0 \\ 0.0 & 0.13140 \pm +0.0 & 0.13557 \pm -0 \\ 0.0 & 0.4346 \pm -0.3 & 0.435729 \pm -0 \\ 0.1 & 0.5746 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5746 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5746 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5746 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5746 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5746 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5765 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5765 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5765 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5765 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5765 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5765 \pm -0.1 & 0.25729 \pm -0 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.25729 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5775 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.2575 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.25755 \pm -0.1 \\ 0.1 & 0.5755 \pm -0.1 & 0.257555 \pm -0.1 \\ 0.1 & 0.57555 \pm -0.1 \\ 0.1 & 0.57555 \pm -0.1 \\ 0.1 & 0.575555 \pm -0.1 \\ 0.1 & 0.575555 \pm -0.1 \\ 0.1 & 0.5755555555555555555555555555555555555$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
OLOCAL HEAT TRANSFER CO:) 0.6807E.010.660372E.0 0.75122E.010.660372E.0 0.815122E.010.683716E.0 0.815256E.020.015825E.0 0.017782E.020.015825E.0 0.3710/F.020.015825E.0 0.3710/F.020.015825E.0 0.3710/F.020.015822E.0 0.057256E.020.015822E.0 0.057256E.020.0158625E.0 0.04221ME.010.048882E.0 0.04625E.000.04886E.0 0.04625E.000.04886E.0 0.04625E.000.04886E.0 0.04625E.000.04886E.0	1 0.68653/.401 0.69056E* 1 0.35886E*01 0.33839E* 1 0.75886E*01 0.33839E* 1 0.79550:401 0.10579E* 2 0.15925E*02 0.15530E* 2 0.13925E*02 0.15530E* 2 0.35589E*02 0.35499E* 2 0.35153E*02 0.35499E* 0 0.35153E*02 0.35499E* 0 0.35096**01 0.51647E* 1 0.6294** 1 0.63309E* 0 0.4359** 0 0.4359** 0 0.4359** 0 0.4579** 0 0.45	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	01 0.40915F+01 0.78308F+C 01 0.44754E+01 0.7128E+C 01 0.4755E+01 0.7025E+C 02 0.13181E+02 0.13926E+C 02 0.139165E+02 0.13926E+C 02 0.38985E+02 0.37707E+C 02 0.38985E+02 0.37707E+C 02 0.38985E+02 0.36975E+C 01 0.57366E+01 0.50975E+C 01 0.55726E+01 0.51067E+C 01 0.55726E+01 0.57067E+C 01 0.55726E+01 0.57067E+C 01 0.55746E+01 0.66585E+ 05772E+00 VISC STAB= 0.2' C CHANGE (IE0)=	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

0 *** FORCE COEFFICIENTS ***

L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR+ L1+(DV-DV+

E0 1 VAR 1 0.30483E+04 0.11665E-01-0.63767E-03-0.11586E+02 0.79402E-05 0.00000E+00 0.14936E+02-0.41381E-03-0.75187E+01-0.57466E-03 E0 1 VAR 3 0.00000E+00 0.41373E-01-0.24101E-02 0.00000E+00 0.11844E-04 0.00000E+00-0.92577E+01-0.29702E-02 0.00000E+00-0.52633E-03 E0 1 VAR 4 0.76059E+02 0.11363E+01 0.15882E-02 0.72002E+00 0.18537E-02 0.00000E+00-0.46809E+03 0.22838E-02 0.00000E+00-0.52633E-03 E0 1 VAR 5 0.00000E+00 0.866169E+02 0.1582E-02 0.70002E+00 0.18537E-02 0.00000E+00-0.46809E+03 0.22838E-02 0.00000E+00-0.55814E-01 E0 1 VAR 5 0.00000E+00 0.866169E+00-0.6726E-03 0.00000E+00-0.22073E-03 0.00000E+00-0.46809E+03 0.22838E-02 0.00000E+00-0.55814E-01 E0 1 VAR 5 0.00000E+00 0.866169E+00-0.5786E-03 0.00000E+00-0.36843E+01-0.64855E+01 0.69787E+00 -0.44834E+01-0.17353E-01

EQ 3 VAR 1 0.00000E+00 0.11665E-01-0.63767E-03 0.00000E+00 0.27923E-05 0.00000E+03 0.19581E+02-0.41381E-03 0.00000E+00-0.78128E-64 EQ 3 VAR 3 0.30483E+04 0.41373E-01-0.24101E-02-0.43789E+02 0.19904E-03 0.00000E+00-0.12306E+02-0.29702E-02-0.53966E+02-0.57282E-02 EQ 3 VAR 4 0.26436E+03 0.11363E+01 0.15882E-02 0.25026E+01 0.63336E-02 0.00000E+00 0.13434E+03 0.2283EE-02 0.55986F+01 0.15593E-01 EQ 3 VAR 5 0.0000E+00 0.86169E+00-0.67296E-03 0.00000E+00 0.39838E+01-0.50375E+02 0.90139E+00 -0.43398E+02-0.44298E+02-0.44289E-02 0.0000E+00 0.99838E+01-0.50375E+02 0.90139E+00 -0.50368E+02-0.44259E-03

E0 4 VAR 1 0.00000E+00 0.11665E-01-0.63767E-03 0.00000E+00-0.29416E-04 0.00000E+00 0.19388E+03-0.41381E-03 0.00000E+00-0.19828E-02 E0 4 VAR 3 0.00000E+00 0.41373E-01-0.24101E-02 0.00000E+00 0.12076E-02 0.00000E+00-0.21463E+03-0.29702E-02 0.00000E+00-0.4460E-01 E0 4 VAR 4 0.65012E+04 0.11363E+01 0.15882E-02 0.61545E+02 0.12529E-03 0.00000E+00 0.23582E+00 0.227038E-02 0.88496E+02 0.4986E+02 E0 4 VAR 5 0.00000E+00 0.86169E+03-0.67296E-03 0.00000E+00 0.0000E+00 0.0000E+00 0.214398E-02 0.0000E+00 0.0000E+00 E0 4 VAR 5 0.00000E+00 0.86169E+03-0.67296E-03 0.00000E+00 0.00000E+00 0.00000E+00 0.214398E-02 0.00000E+00 0.0000E+00 E0 4 VAR 5 0.00000E+00 0.86169E+03-0.67296E-03 0.00000E+00 0.00000E+00 0.0000E+00 0.23582E+02 0.88493E+01 0.88496E+02 0.46147E+01

E0 5 VAR 1 0.00000E+00 0.11665E-01-0.63767E-03 0.00000E+00 0.66164E-05 0.00000E+00 0.16983E+03-0.41381E-03 0.00000E+00-0.16783E-02 E0 5 VAR 3 0.00000E+00 0.41373E-01-0.24101E-02 0.00000E+00 0.14458E-02 0.00000E+00-0.18000E+02-0.2703E-02 0.00000E+00-0.38292E-01 E0 5 VAR 4 0.39780E+04 0.11763E+01 0.15887E-02 0.37659E+02 0.56441E-04 0.00000E+00 0.15888E+00 0.2283E-02 0.54150E+02 0.2070E=03 E0 5 VAR 5 0.21775E+04 0.86169E+00-0.67296E+03-0.87343E+01 0.42178E+01 0.0000E+00 0.15848E+00 0.214398E-02-0.18650E+02 0.2070E=03 E0 5 VAR 5 0.21775E+04 0.86169E+00-0.67296E+03-0.87343E+01 0.42112E+05 0.0000E+00 0.15848E+00 0.214398E+02-0.18676E=02 E0 5 VAR 5 0.21775E+04 0.86169E+00-0.67296E+03-0.87343E+01 0.431458E+01 0.35466E+02 0.33773E+01 0.35468E+02-0.41431E=01

UPSTREAM TOTAL PRESSURE - LX+PDUM 58

0.1286058037E+01

UPSTREED TOTAL PRESSORE EXTEDO	56 0012600560572.01	
$\begin{array}{c} 0 \text{PVL}(LLX) \\ 0.98(33) E + 00 & 0.98011 E + 00 & 0.9776 5 E + 00 \\ 0.93(50 E + 00 & 0.82066 E + 00 & 0.65781 E + 00 \\ 0.97155 E + 00 & 0.97633 E + 00 & 0.97735 E + 00 \\ 0.10401 E + 01 & 0.1056 E + 01 & 0.1023 E + 01 \\ 0.12740 E + 01 & 0.13045 E + 01 & 0.1223 E + 01 \\ 0.1276 E + 01 & 0.13045 E + 01 & 0.1223 E + 01 \\ 0.1275 E + 01 & 0.13735 E + 01 & 0.1223 E + 01 \\ 0.1275 E + 01 & 0.13735 E + 01 & 0.1223 E + 01 \\ 0.14714 E + 01 & 0.14279 E + 01 & 0.14051 E + 01 \\ 0.1875 E + 01 & 0.14279 E + 01 & 0.10554 E + 11 \\ 0.81272 E + 00 & 0.8519 E + 00 & 0.78619 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8618 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8618 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8618 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8619 E + 00 \\ 0.8372 E + 00 & 0.8619 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8619 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8619 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 00 & 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 0.8519 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 0.0518 E + 0.0518 E + 00 & 0.8519 E + 00 \\ 0.8372 E + 0.0518 E$	1 0.97519E+00 0.97226E+00 0.97395E+00 0.978596E+00 0.97460E+00 0.94471E+00 0.93803E+00 0.97519E+00 0.98762E+00 0.94664E+00 0.70035E+00 0.8574PE+00 0.95303E+00 0.96616+0C 0.996046E+00 0.98405E+00 0.94664E+00 0.79620E+00 0.1049F+01 0.1013F+01 0.10260F+01 0.19596F+01 0.11188E+01 0.11437E+01 0.11699E+01 0.11972E+01 0.12535E+01 0.13377F+01 0.16181E+01 0.1143747E+01 0.13747E+01 0.13745E+01 0.1374E+01 0.13575E+01 0.15358E+01 0.15253E+01 0.15118E+01 0.16619E+01 0.16411E+01 0.1627E+01 0.16099E+01 0.13365+01 0.15253E+01 0.15118E+01 0.15131E+01 0.16411E+01 0.1627E+01 0.16295E+01 0.13365+01 0.15253E+01 0.15118E+01 0.15131E+01 0.16411E+01 0.1627E+01 0.12535E+01 0.13365+01 0.15253E+01 0.15118E+01 0.15731E+01 0.1477RE+01 0.1471E+01 0.1627E+10 0.13624F+01 0.10120E+01 0.94668E+00 0.7188E+00 0.78668E+00 0.8664E+00 0.86168E+00 0.8288F+00 0.78678E+00 0.87828E+00 0.970785E+00 0.97209E+00 0.97219E+00 0.97321E+00 0.97335E+00 0.97335E+00 0.97335E+00 0.97335E+00 0.97335E+00 0.97335E+00 0.973355E+00 0.973355E+00 0.973355E+00 0.973431E+00 0.973431E+00 0.973455E+00 0.973455	
$ \begin{array}{c} 0.347 \\ \hline 0.347 \\ \hline 0.357 \\ $	3 0.34063E-03 0.34007F-03 0.33956E-03 0.33909F-03 0.33867F-03 0.33830F-03 0.33796E-03 5 0.33698E-03 0.33684E-03 0.33668E-03 0.33650E-03 0.33629E-03 0.33606E-03 0.33590E-03 0.33593E-03 0.33589F-03 0.5127E-03 0.51429E-03 0.51430E-03 0.51431E-03 0.51431E-03 0.21805E-03 0.21814E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21805E-03 0.21814E-03 0.21824E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.212805E-03 0.21814E-03 0.21824E-03 0.21786E-03 0.21786E-03 0.21786E-03 0.21878E-03 0.212805E-03 0.21814E-01 0.22865E+00 0.13140E+00 0.13557E+00 0.14056E+00 0.14388E+00 0.75291E-01 0.72078E-01 0.72040E-01 0.73462E-01 0.35785E-01 0.33678E-03 0.31811E-03 0.27264E-01 0.2051E-03 0.11862E-03 0.274549E-01 0.32569E-01 0.33678E-02 0.84656+02 0.27264E-01 0.2051E-03 0.11862E-03 0.137462E-03 0.13152E-02 0.27140E-02 0.27150E-02 0.270794E-02 0.40804E-02 0.40801E-02 0.40812E-02 0.27132E-02 0.27140E-02 0.27150E-02 0.18043E-03 0.52503E-03 0.55654E-03 0.18281E-02 0.47386E-02 0.27140E-02 0.27150E-02 0.522602E-03 0.55203E-03 0.55654E-03 0.52631E-03 0.55233E-03 0.553028E-03 0.54299E-03	
$\begin{array}{c} 0.65160E+01 & 0.653008E+01 & 0.65225E+01 \\ 0.71184E+01 & 0.89629E+01 & 0.33299E+01 \\ 0.71184E+01 & 0.89629E+01 & 0.33299E+01 \\ 0.7914E+01 & 0.92576E+01 & 0.98640E+01 \\ 0.15620E+02 & 0.15230E+02 & 0.15245E+02 \\ 0.1665RE+02 & 0.16402E+02 & 0.18066E+02 \\ 0.35491E+02 & 0.34420E+02 & 0.35014E+02 \\ 0.35355E+02 & 0.34216+02 & 0.35276E+02 \\ 0.18168E+02 & 0.35943E+02 & 0.13724E+02 \\ 0.39115E+01 & 0.37946E+01 & 0.37045E+01 \\ 0.56730E+01 & 0.35943E+01 & 0.60539E+01 \\ 0.587103E+01 & 0.36208E+01 & 0.47960E+01 \\ 0.587103E+01 & 0.369591E+01 & 0.60539E+0 \\ 0.587103E+01 & 0.39591E+01 & 0.60539E+0 \\ 0.587103E+01 & 0.39590E+01 & 0.60539E+0 \\ 0.587103E+01 & 0.3950E+01 & 0.60539E+0 \\ 0.587103E+01 & 0.3950E+01 & 0.60539E+0 \\ 0.587103E+01 & 0.3950E+01 & 0.60539E+0 \\ 0.587102E+01 & 0.4950E+01 & 0.60539E+0 \\ 0.587102E+01 & 0.4950E+01 & 0.60539E+0 \\ 0.5871E5TE & 0.4950E-01 & 0.14TE & 57 \\ 0.587102E+01 & 0.4950E-01 & 0.14TE & 57 \\ 0.587102E+01 & 0.4950E-01 & 0.14TE & 57 \\ 0.587102E+01 & 0.4950E+01 & 0.60539E+0 \\ 0.587102E+01 & 0.4950E+01 & 0.60539E+0 \\ 0.587102E+01 & 0.4950E+01 & 0.58591E+01 \\ 0.587102E+01 & 0.4950E+01 & 0.5859E+01 \\ 0.5871E+01 & 0.4950E+001 & 0.5859E+001 \\ 0.5871E+01 & 0.4950E+001 & 0.5859E+001 \\ 0.5871E+01 & 0.4950E+001 & 0.5859E+001 \\ 0.5871E+000E+000E+00E+00E+00E+00E+00E+00E+00E$	1 0.65969f+01 0.66606f+01 0.69474E+01 0.77283E+01 0.774633E+01 0.65703E+01 0.66204E+01 0.52582E+01 0.35603E+01 0.3297E+01 0.41442E+11 0.67661E+01 0.82526E+01 0.81585E+01 0.77294E+01 0.77294E+01 0.75291E+01 0.77294E+01 0.779165E+01 0.817174E+01 0.817174E+01 0.5164E+02 0.13362E+02 0.1278E+02 0.15833E+02 0.16652E+02 0.14250E+02 0.14707E+02 0.5362E+02 0.27480E+02 0.33546E+02 0.35695E+02 0.33430E+02 0.3300E+02 0.3304E+02 0.5362E+02 0.27480E+02 0.35562E+02 0.35567E+01 0.871565E+02 0.3300E+02 0.3300E+02 0.5362E+02 0.27480E+02 0.35567E+01 0.35695E+02 0.3300E+02 0.3300E+02 0.5362E+02 0.27480E+02 0.35567E+01 0.35695E+02 0.3300E+02 0.3300E+02 0.53672E+02 0.27480E+02 0.35567E+01 0.375575E+01 0.47155570E+01 0.404555+01 0.53765E+02 0.35672E+01 0.7155750E+01 0.375576E+01 0.37926E+01 0.40646E+01 0.4035570+01 0.55726E+01 0.365765E+01 0.557576E+01 0.57576E+01 0.567876E+01 0.40646E+01 0.457571E+01 0.4608857+01 0.46656E+01 0.557574E+01 0.463877E+01 0.464455E+01 0.557574E+01 0.460885E+01 0.562866E+01 0.557574E+01 0.463877E+01 0.464455E+01 0.557574E+01 0.460885E+01 0.562866E+01 0.557574E+01 0.463877E+01 0.464455E+01 0.557574E+01 0.460885E+01 0.562866E+01 0.557574E+01 0.46485E+01 0.464455E+01 0.46485E+01 0.46485E+01 0.46485E+01 0.46485E+01 0.457574E+01 0.460885E+01 0.562866E+01 0.557574E+01 0.4648E+05 10740J= 1 0.460885E+01 0.562866E+01 0.557574E+01 0.4648E+05 10740J= 1 0.460885E+01 0.458642E+01 0.558566E+01 0.458877E+01 0.46485E+01 0.46485	
D *** FORCE COEFFICIENTS ***		

FRC2 = -0.707066+00 FRCX = 0.19309E+01 FRCN = -0.707066+004FKL = 0.1000 FRC2 = -0.707066+00 FRCX = 0.19309E+01 FRCN = -0.707066+004FKL = 0.1000 ** REAVG = 0.2275E+03 RESEQ = 0.226E+04 LX = 58 LY = 1 LZ = 3 TE0 = 1 RESEAVG = 0.120E+03 RESEQ = 0.226E+03 LX = 57 LY = 1 LZ = 3 TE0 = 4 RESAVG = 0.120E+03 RESEQ = 0.216E+04 LX = 58 LY = 1 LZ = 3 TE0 = 4 RESAVG = 0.120E+03 RESEQ = 0.216E+04 LX = 58 LY = 1 LZ = 3 TE0 = 4 RESAVG = 0.120E+03 RESEQ = 0.216E+04 LX = 58 LY = 1 LZ = 3 TE0 = 4 RESAVG = 0.120E+03 RESEQ = 0.216E+04 LX = 58 LY = 1 LZ = 3 TE0 = 4 RESAVG = 0.120E+03 RESEQ = 0.107E+04 LX = 58 LY = 1 LZ = 3 DTISAV, JCBN = 0.3132E+01-0.170+04R(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR L1+ OVAR(N+1) OVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR L1+ OVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR DVAR DVAR(+) A/DT+DVAR L1+ OVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR L1+ OVAR(N+1) A/DT+DVAR DVAR(+) 0.472454 (0.1000000E+00 0.483075E+01-0.35980E-03-0.00000E+00 -0.47235F+02 0.40000E+00 -0.47235F+02 0.400000E+00 -0.47235F+02 0.40000E+00 -0.47235F+02 0.4000E+00 -0.47235F+02 0.47245F+02 0.47245F+02 0.4755F+02 0.4755F+

A/DT+DVAR+ L1+(DV-DV+

E0 1 VAR 1 0.30529E+04 0.11027E-01-0.37075E-03-0.10541E+02 0.47225E-D5 0.00000E+00 0.83075E+01-0.35980E-03-0.10230F+02-0.47244E-03 E0 1 VAR 3 0.00000E+00 0.38963E-01-0.13547E-02 0.00000E+00 0.57706E-05 0.00000E+00-0.4823E+01-0.15105E-02 0.00000E+00-0.25354E-03 E0 1 VAR 4 0.71921E+02 0.11379E+01 0.88081E-03 0.58999E+0C 0.11430E-02 0.00000E+00-0.25728E+03 0.11034E-02 0.73909E+0C 0.11019E-C2 E0 1 VAR 5 0.00000E+00 0.86102E+00-0.36126E-03 0.00000E+00-0.12478E-03 0.00000E+00-0.257384F33-0.5584137-03 0.00000E+00-0.6955E-02 E0 1 VAR 5 0.00000E+00 0.86102E+00-0.36126E-03 0.00000E+00-0.24808E+00-0.94920E+01 0.21218E+00 -0.94907E+01-0.54196E-02 E0 1 A+LX+LY+LZ+PES+SPLIT=-0.99512E+01 0.10287E-02 0.00000E+00-0.24808E+00-0.94920E+01 0.21218E+00 -0.94907E+01-0.54196E-02

E0 3 VAR 1 0.00000E+00 0.11027E-01-0.37075E-03 0.00000E+00 0.15841E-05 0.00000E+00 0.10776E+02-0.35980E-03 0.00000E+00-0.61784E-04 E0 3 VAR 3 0.30529E+04 0.38963E-01-0.13547E-02-0.38518E+02 0.10155E-03 0.0000E+00 0.70278E+01-0.15105E-02-0.42947E+02-0.27426E-62 E0 3 VAR 4 0.44904E+03 0.11379E+01 0.88081E-03 0.20427E+01 0.39055E-02 0.00000E+00 0.73832E+22 0.11034E-02 0.25593E+01 0.61582E-02 E0 3 VAR 5 0.00000E+00 0.86102E+00-0.36126E-03 0.20427E+01 0.0-0.4646E-03 0.00000E+00 0.7753F+02-0.58813E-03 0.00000E+00 0.22199E-01 E0 3 VAR 5 0.00000E+00 0.86102E+00-0.36126E-03 0.00000E+00-0.4646E-03 0.00000E+00 0.7753F+02-0.58813E-03 0.00000E+00 0.22199E-01 E0 3 VAR 5 0.00000E+00 0.86102E+00 0.35126E-02 0.00000E+00 0.48272E+01-0.40392E+02 0.91353E+00 -0.40388E+02-0.18045E-01

EQ 4 VAR 1 0.00000E+00 0.11027E-01-0.37075E-03 0.00000E+00-0.14908E-04 0.00000E+00 0.11323E+03-0.35980E-03 0.00000E+00-0.16388E-02 EQ 4 VAR 3 0.00000E+00 0.38963E-01-0.13547E-02 0.00000E+00 0.64166E-03 0.00000E+00-0.12139E+03-0.15105E-02 0.0000E+00-0.22837E-01 EQ 4 VAR 4 0.65012E+04 0.11379E+01 0.08081E-03 0.53331E+02 0.73864E-C4 0.00070E+00 0.98038E-01 0.11034E-02 0.66809E+02 0.22837E-01 EQ 4 VAR 5 0.60000E+00 0.86102E+00-0.36126E-03 0.0000E+00 0.0000E+00 0.00000E+00-0.0000E+00-0.28837E-03 0.0000E+00 EQ 4 VAR 5 0.60000E+00 0.86102E+00-0.36126E-03 0.00000E+00 0.00000E+00 0.00000E+00-0.088038E-03 0.00000E+00 0.0000E+00 EQ 4 VAR 5 0.60000E+00 0.86102E+00-0.36126E-03 0.00000E+00 0.60000E+00 0.00000E+00-0.58813E-03 0.0000E+00 0.0000E+00 EQ 4 VAR 5 0.60000E+00 0.86102E+00-0.36126E-03 0.00000E+00-0.880533E+01 0.66808E+02 0.54250E+01 0.66809E+02-0.24215E-01

E0 5 VAR 1 0.00000E+00 0.11027E-01-0.37075E-03 0.00000E+00 0.58570E-05 0.00000F+00 0.99014E+02-0.359A0E-03 0.00000E+00-0.13939E-02 E0 5 VAR 3 0.00000E+00 0.38963E-01-0.13547E-02 0.0000E+00 0.78196E-03 0.00000E+00-0.1664E+03-0.15105E-02 0.0000E+00-0.19456E-01 E0 5 VAR 4 0.39749E+04 0.11379E+01 0.8AR081E-03 0.2007E+02 0.34488E-04 0.00000F+00 0.65627E-11 0.11034E-02 0.4CA88E+02 0.76207E-04 E0 5 VAR 5 0.21808E+04 0.86102E+07-0.36126E-03-0.73373E+01 0.1727E+05 0.00000E+0 0.065754E+01-0.58813F-03-0.11945E+02 0.76207E-04 E0 5 VAR 5 0.21808E+04 0.86102E+07-0.36126E-03-0.73373E+01 0.1727E+05 0.00000E+0 0.065754E+01-0.58813F-03-0.11945E+02 0.76207E-03 E0 5 A+LX+LY+LZ+RES+SPLIT= 0.25270E+02 0.82410E-03 0.00000E+00-0.58667E+00 0.28902E+02 0.30463E+01 0.28903E+02-0.21417E-01

0.1297056330E+01 UPSTREAM TOTAL PRESSURE - LX.PDUM 58

PUL(LLX) 0.98200F+00 0.98052E+00 0.97800E+00 0.97550E+00 0.97259E+00 0.97422E+00 0.98615E+00 0.97468E+00 0.94473E+00 0.93796E+00 0.931655+00 0.48229E+00 0.65976E+00 0.60119E+00 0.59195E+00 0.6161CE+00 0.70227E+00 0.45905E+00 0.974587E+0C 0.9690F+00 0.97778E+00 0.977782E+00 0.97910E+00 0.98253E+20 0.99149E+00 0.99149E+00 0.79957E+00 0.10090E+01 0.10190E+01 0.10314F+01 0.10463E+01 0.1063E+01 0.10829E+01 0.11044E+01 0.11281E+01 0.11387E+01 0.11403E+01 0.12361F+01 0.12361F+01 0.12360E+01 0.13140E+01 0.13314E+01 0.13448E+01 0.11281E+01 0.113804E+01 0.13924E+01 0.13994E+01 0.123615+01 0.13865E+01 0.13743E+01 0.14195+01 0.15299E+01 0.16166F+01 0.15135E+01 0.16621E+01 0.1625E+01 0.15278E+01 0.151376E+01 0.15278E+01 0.1507E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15137E+01 0.1507E+01 0.1507E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15178E+01 0.15278E+01 0.15178E+01 0.15278E+01 0.15178E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15278E+01 0.15178E+01 0.15278E+01 0.15178E+01 0.15278E+01 0.77958E+00 0.77958E+00 0.77958E+00 0.77958E+00 0.77958E+00 0.77958E+00 0.77958E+00 0. OPWL(LLX)

0 *** FORCE COEFFICIENTS ***

FRCX = 0.19507E+01 FRCN = -0.72167E+00FRC = 0.19507E+01 FRC2 = -0.72167F+00 FRCX = 0.19507E+01 FRCN = -0.72167E+00FRC = 0.19507E+01 0CMOM=-0.32963E+00 * REAVG = 0.206E+03 RESMAX = 0.165E+04 LX = 58 LY = 1 LZ = 3 1E0 = 1 RESAVG = 0.457E+02 RESEQ=-0.286E+03 LX = 75 LY = 1 LZ = 3 IEG = 3 RESAVG = 0.344E+02 RESEQ=-0.210E+03 LX = 13 LY = 1 LZ = 4 1E0 = 1 RESAVG = 0.206E+03 RESEQ = 0.165E+04 LX = 58 LY = 1 LZ = 3 IEG = 3 RESAVG = 0.964E+02 RESEQ = 0.747E+03 LX = 10 LY = 1 LZ = 3 1E0 = 4 RESAVG = 0.206E+03 RESEQ = 0.165E+04 LX = 58 LY = 1 LZ = 3 IEG = 5 RESAVG = 0.964E+02 RESEQ = 0.747E+03 LX = 70 LY = 1 LZ = 3 DTISAV, JCRN = 0.74506E+01-0.14741E-06 VAR(N) VAR(N) VAR(N) VAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR+ L1+(DVAR) OVAR(N+1) A/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) A/DT+DVAR+ L1+(DV-DV+ AN VAR(N) E0 | VAR 1 0.30554E+04 0.10657E-01-0.41174E-03-0.93733E+01 6.51764E-05 0.00000E+00 0.86749E+01-0.44334E-03-0.10093E+02-0.56279E-03 E0 1 VAR 3 0.00000E+00 0.37608E-01-0.14819E-02 0.00000E+00 0.54479E-05 0.00000E+00-0.49409E+01-0.16566E-02 0.00000E+00-0.26961E-03 E0 1 VAR 4 0.69519E+02 0.11388E+01 0.95511E-03 0.49367E+00 0.13564E-02 0.00000E+00-0.26431E+03 0.12032E-02 0.6219E+0E 0.57657E-03 E0 1 VAR 5 0.00000E+00 0.86666E+00-0.36146E=03 0.00000E+00-0.14661E=03 C.00000E+00 0.26126E+03-0.55857E-03 0.00000E+00-0.461920E-02 E0 1 VAR 5 0.00000E+00 0.86666E+00-0.36146E=03 0.00000E+00-0.14661E=03 C.00000E+00 0.26126E+03-0.55857E-03 0.00000E+00-0.461920E-02 E0 1 VAR 5 0.00000E+00 0.86666E+00-0.31464E=03 0.00000E+00-0.14661E=03 C.00000E+00 0.26126E=03-0.55857E-03 0.00000E+00-0.461920E-02 E0 1 A+LX+LY+LZ+RES+SPLIT=-0.88796E+01 0.12204E-02 0.00000E+00 0.468388E+00-0.94709E+01 0.93825E-01 -0.94694E+01-0.11545E-02 EQ 3 VAR 1 0.00000E+00 0.10657E-01-0.41174E-03 0.00000E+00 0.17217E-05 0.00000E+00 0.11658E+02-0.44334E-03 0.00000E+00-0.73195E-04 EQ 3 VAR 3 0.30554E+04 0.37608E-01-0.14819E-02-0.33735E+02 0.10337E-03 0.00000E+00-0.82055E+01-0.16566E-02-0.37713E+02-0.2103E-02 EQ 3 VAR 4 0.24043E+03 0.11388E+01 0.9531E-03 0.17073E+01 0.46348E-02 0.00000E+00 0.75851E+02 0.12032E-02 0.21552E+01 0.2061E+01 EQ 3 VAR 5 0.00000E+00 0.86666E+00-0.36146E+03 0.00000E+00-0.56050E+00-0.7486E+02-0.25557E+01 0.2061E+01 EQ 3 VAR 4 0.24043E+03 0.11388E+01 0.9531E-03 0.00000E+00-0.50000E+00-0.75851E+02 0.12032E-02 0.21552E+01 0.2061E+01 EQ 3 VAL 4 0.24043E+03 0.11388E+02 0.42389E+02 0.00000E+00 0.43357E+01-0.35553E+02 0.80504E+00 -0.45557E+02-0.408441E+02 ÊQ EQ 4 VAR 1 0.00000E+00 0.10657E-01-0.41174E-03 0.00000E+00-0.15436E-64 0.00000E+00 0.12(40E+03-0.44334E-03 0.00000E+00-0.20043E-02 EQ 4 VAR 3 0.00000E+00 0.37608E-01-0.14819E-02 0.00000E+00 0.64971E-03 0.00000E+00-0.13346E+03-0.16566F-02 0.00000E+00-0.25120E-01 EQ 4 VAR 4 0.65012E+04 0.11388E+01 0.95311E-03 0.46166E+02 0.85666E-04 0.00000E+00 0.90434E-01 0.12032E-02 0.50279E+02 0.78279E+02 0.78279E+02 0.7000E+00 0.0000E+00 0.000E+00 0.0000E+00 0 EQ 5 YAR 1 0.00000E+00 0.10657E-01-0.41174E-03 0.00000E+00 0.75520E-C5 0.00000E+00 0.11042E+03-0.44334E-03 0.00000E+00-0.17062E-02 Eq 5 VAR 4 0.307326+04 0.8138RE-01-0.14819E-02 0.80000E+00 0.81382E+03 0.00002E+00-0.11092E+03-0.45387E+03 0.00000E+00-0.21393E+02 Eq 5 VAR 4 0.37732E+04 0.8138RE-01 0.95311E+03 0.203215E+02 0.40954E+04 0.00000E+00-0.60617E-01 0.12032E+02 0.2346E+03 Eq 5 VAR 5 0.21826E+04 0.86066E:00-0.36146E+03-0.36740E+01 0.92473E+04 0.00000E+00 0.4619E+01-0.5857E+03-0.3587E+02 0.2346E+03 Eq 5 VAR 5 0.21826E+04 0.86066E:00-0.36146E+03-0.36740E+01 0.92473E+04 0.00000E+00 0.4619E+01 0.5587E+03-0.3587E+02 0.2346E+03 Eq 5 VAR 5 0.21826E+04 0.86066E:00-0.36146E+03-0.36740E+01 0.92473E+04 0.00000E+00 0.4619E+01 0.26533E+02 0.2346E+03 Eq 5 VAR 5 0.21826E+04 0.86066E:00-0.36146E+03-0.36740E+01 0.92653E+02 0.29340E+01 0.26533E+02-0.23456E+03

UPSTREAM TOTAL PRESSURE - LX.PDUM 58 0.1319052916E+01

OPVI CLIX 0+91556+00 0-98124E+00 0-97862E+00 0-97607E+00 0-97319E+00 0-97472E+00 0-98642E+00 0-97469E+00 0-94464E+00 0-93764E+00 0-93193E+00 0-86524E+00 0-66379E+00 0-66792E+00 0-66174E+00 0-97472E+00 0-98642E+00 0-97469E+00 0-95587E+10 0-96756E+00 0-95197E+01 0-10784E+01 0-10997E+01 0-16797E+01 0-66174E+00 0-97472E+00 0-10070E+01 0-10178E+01 0-10293E+01 0-12848E+01 0-10597E+01 0-10784E+01 0-10997E+01 0-11228E+01 0-11742E+01 0-11742E+01 0-12292E+01 0-12292E+01 0-12848E+01 0-13101E+01 0-1328E+01 0-13486E+01 0-13867E+01 0-13761E+01 0-1391E+01 0-14019E+01 0-14075E+01 0-14080E+01 0-12848E+01 0-13761E+01 0-13747E+01 0-11456E+01 0-15288E+01 0-15578E+01 0-15517E+01 0-16380E+01 0-16380E+01 0-1640E+01 0-16471E+01 0-15970E+01 0-15914E+01 0-15783E+01 0-15288E+01 0-155186E+01 0-155077E+01 0-15030E+01 0-14664E+01 0-16471E+01 0-1456E+01 0-14306E+01 0-1074E+01 0-13867E+01 0-15288E+01 0-151578E+01 0-155077E+01 0-15030E+01 0-14664E+01 0-12297E+01 0-1456E+01 0-133074E+01 0-10905E+01 0-108578E+01 0-15288E+01 0-15327E+00 0-88356E+00 0-88556E+00 0-88556

0.9410/E +00 0.97451E +00 0.974522 +00 0.97852 +00 0.9857E +00 0.9167/E +00 0.978852 +00 0.978852 +00 0.98755E +00 0.98755E +00 0.98755E +00 0.98575E +00 0.9855E +00 0.9755E +

0 *** FORCE COEFFICIENTS ***

FRCZ = -0.75199E+00 FRCX = 0.19868E+01 FRCN = -0.75199E+00FRC = 0.19868F+01

A/DT+DVAR+ L1+(DV-DV+

E0 1 VAR 1 0.30607E+04 0.98793E-02-0.32924E-03-0.75080E+01 0.25088E-05 0.00000E+00 0.50305E+01-0.34870E-03-0.79519E+01-0.41190E-03 E0 1 VAR 3 0.00000E+00 0.34812E-01-0.11743E-02 0.000000E+00 0.33011E-05 0.00000E+00-0.55739E+01-0.12882E-02 0.00000E+00-0.19505E-03 E0 1 VAR 4 0.64483E+02 0.11406E+01 0.77658E+03 0.37310E+00 0.11835E-02 0.00000E+00-0.1926E+03 0.93243E-03 0.44798E+00 0.31763E-03 E0 1 VAR 5 0.00000E+00 0.85999E+00-0.26939E-03 0.00000E+00-0.113590E+00 0.11927E+03-0.4023E-03 0.44798E+00 0.31763E-02 E0 1 A.LX.LY.LY.LZ.RES.SPLIT=0.71349E+01 0.10555E-02 0.00000E+00 0.45990E+00-0.75053E+01 0.90581E-01 -0.75039E+01-0.1977E-02

E0 3 VAR 1 0.00000E+00 0.98793E-02-0.32924E-03 0.00000E+00 0.11156E-05 0.00000E+00 0.90321E+01-0.34870E-03 0.00000E+00-0.53599E-04 E0 3 VAR 3 0.30607E+04 0.34812E-01-0.11743E-02-0.26780E+02 0.72163E-04 0.00000E+00-0.63666E+01-0.12882E-02-0.29376E+02-0.21004E-02 E0 3 VAR 4 0.22262E+03 0.11466E+01 0.77658E-03 0.12881E+01 0.40443E-02 0.00002E+00 0.57181E+02 0.93243E-03 0.15466E+01 0.10855E-61 E0 3 VAR 5 0.00000E+00 0.85999E+00-0.26739E-03 0.0000E+00-0.4575E-03 0.00000E+00-0.55781E+02 0.93243E-03 0.15466E+01 0.10855E-61 E0 3 VAR 5 0.00000E+00 0.85999E+00-0.26739E-03 0.0000E+00-0.45755E-03 0.00000E+00-0.56891E+02-0.40839E-03 0.00000E+00-0.5546E+01 E0 3 A+LX+LY+LZ+RES+SPLIT=0.25491E+02 0.36600E-02 0.0000CE+00 0.29540E+01-0.2785E+02 0.61443E+00 -0.27830E+02-0.68452E-02

E0 4 VAR 1 0.00000E+00 0.98793E-02-0.32924E-03 0.00000E+00-0.16163E-04 0.00000E+00 0.10320E+03-0.34870E-03 0.00000E+00-0.15852E-02 E0 4 VAR 3 0.00000E+00 0.34612E-01-0.11743E-02 0.000000E+00 0.46192E-03 0.00000E+00-0.10637E+73-0.12802E-02 0.00000E+00-0.19581E-01 E0 4 VAR 4 0.65012E+04 0.11406E+31 0.77658E-03 0.37616E+02 0.6775E=04 0.00000E+00 0.54471E-01 0.93243E-03 0.45165E+02 0.37959E-03 E0 4 VAR 5 0.00000E+00 0.85999E+00-0.26939E-03 0.0000E+00 0.4000E+00 0.0000E+00 0.54471E-01 0.93243E-03 0.45165E+02 0.37959E+03 E0 4 VAR 5 0.00000E+00 0.85999E+00-0.26939E-03 0.00000E+00 0.40000E+00 0.0000E+00 0.0000E+00 0.4637E+03 0.45165E+02 0.37959E+03 E0 4 A.LX,LY,LZ,RES,SPLITE 0.37616E+02 0.51355E-03 0.00000E+00-0.31207E+01 0.45164E+02 0.44284E+01 0.45165E+02-0.20767E-01

EQ 5 VAR 1 0.00000E+00 0.98793E-02-0.32924E-03 0.00000E+00 0.29635E-05 0.00000E+00 0.89981E+02-0.34870E-03 0.00000E+00-0.13481E-02 EQ 5 VAR 3 C.00000E+00 0.34812E-31-0.11743E-02 0.00000E+00 0.59916E-03 0.00000E+10-0.92749E+02-0.12882E-02 0.00000E+00-0.16659E-01 ED 5 VAR 4 0.39700E+04 0.14406E+01 0.77658E-03 0.22971E+02 0.34079E-04 C.00000E+00 0.36587E-01 0.93243E-03 C.27581E+02 0.11719E-03 E0 5 VAR 5 0.21864E+04 0.85999E+00-0.26939E-03-0.43872971E+02 0.34079E-04 C.00000E+00 0.25910E+01-0.40839E-03 -0.6526E+01-0.40216E-03 E0 5 VAR 5 0.21864E+04 0.85999E+00-0.26939E-03-0.438721E+02-0.0000E+00 0.22930E+01 0.9002E+01 0.9000E+00-0.40216E-03 E0 5 VAR 5 0.21864E+04 0.85999E+00-0.26339E-03-0.438728E+00-0.6726E+00-0.22930E+01 0.40839E-03-0.66526E+01-0.40216E-03 E0 5 VAR 5 0.21864E+04 0.85999E+00-0.2633528E-03 0.00000E+00 0.19823E+00 0.22937E+02 0.25439E+01 0.402392E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40228E+02-0.40282E+02-0.40282E+02-0.4028E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40228E+02-0.40228E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.40282E+02-0.4028E+02-0.40282E+02-0.4028E+02-0.4028E+02-0.4028E+02-0.40282E+02-0.4028E+02-0.402

UPSTREAM TOTAL PRESSURE - LX.PDUM 58 0.1308054623E+01 0PUL(LLX) 0.99323E+00 0.98089E+00 0.97831E+00 0.97579E+00 0.97289E+00 0.97447E+00 0.98630E+00 0.97471E+00 0.94470E+00 0.93782E+00 0.99323E+00 0.82383E+00 0.66176+00 0.60510E+00 0.59664E+00 0.61933E+00 0.70419E+00 0.8655E+00 0.95524E+00 0.96671E+00 0.9746E+00 0.97938E+00 0.98095E+00 0.98473E+00 0.99945E+00 0.9945E+00 0.10032E+01 0.10137+01 0.10246E+01 0.12647E+01 0.1274E+01 0.1024E+01 0.1274E+01 0.10707E+01 0.10137E+01 0.11378E+01 0.11638E+01 0.11038E+01 0.110385E+01 0.12867E+01 0.12867E+01 0.12867E+01 0.12647E+01 0.1274E+01 0.1360E+01 0.1374E+01 0.13402E+01 0.1370E+01 0.1655E+01 0.1655E+01 0.1509E+01 0.16407E+01 0.14647E+01 0.14647E+01 0.14647E+01 0.1574E+01 0.1360E+01 0.1374E+01 0.15771E+01 0.15269E+01 0.15520E+01 0.1550E+01 0.1506E+01 0.1500E+01 0.1506E+00 0.97454E+00 0.47843E+00 0.1461E+01 0.1391E+01 0.15771E+01 0.15869E+01 0.15202E+01 0.15150E+01 0.1506E+00 0.80677E+00 0.47843E+01 0.1461E+01 0.14301E+01 0.1070E+01 0.13861E+01 0.13637E+01 0.13427E+01 0.13972E+01 0.1500E+01 0.12609E+01 0.12609E+01 0.12609E+01 0.12609E+01 0.12609E+01 0.12609E+01 0.12609E+01 0.1277E+01 0.1277E+01 0.1277E+01 0.1277E+01 0.1277E+01 0.1527E+01 0.1557E+00 0.9765E+00 0.80677E+00 0.80677E+00 0.807E+01 0.12609E+01 0.1277E+01 0.1277E+01 0.1387E+01 0.3427E+01 0.3427E+00 0.8067E+00 0.8067E+00 0.8067E+00 0.8077E+00 0.8077E+00 0.8077E+00 0.8077E+00 0.8067E+00 0.8067E+00 0.8087E+00 0.8087E+00 0.8077E+00 0.8077E+00 0.8087E+00 0.80 unacture.uu g.attbc/131.cuu g.attbc/131.cuu g.attbc/12.cuu g.

J *** FORCE COEFFICIENTS ***

FRCZ = -0.73666F+00 FRCX = 0.19691E+01 FRCN = -0.73666E+00FRC = 0.19691E+01 0CM0H=-0.33811E+00 • REAVG = 0.170E+03 RESMAX = 0.136E+04 LX = 70 LY = 1 LZ = 3 1E0= 1 RESAVG = 0.472E+03 RESE0=-0.272E+03 LX = 75 LY = 1 LZ = 3 IE0= 3 RESAVG = 0.318E+02 RESE0=-0.190E+03 LX = 12 LY = 1 LZ = 5 IE0= 4 RESAVG = 0.470E+03 RESE0 = 0.436E+04 LX = 70 LY = 1 LZ = 3 IE0= 5 RESAVG = 0.318E+02 RESE0=-0.598E+03 LX = 12 LY = 1 LZ = 5 IE0= 4 RESAVG = 0.470E+03 RESE0 = 0.436E+04 LX = 70 LY = 1 LZ = 3 IE0= 5 RESAVG = 0.776E+02 RESE0=-0.598E+03 LX = 70 LY = 1 LZ = 3 DTISAV, JCINE 0.474506E+01-0.14741E-06 DVAR(+) A/DT+DVAR L1+0VAR L2+0VAR L3+0VAR DVAR(+) A/DT+DVAR L1+(DVAR) FRCX = 0.19691E+01 FRCN = -0.73666E+00FRC = 0.19691E+01 סעאר(N+1) א/DT+DVAR L1+DVAR L2+DVAR L3+DVAR DVAR(+) א/DT+DVAR+ L1+(DV−DV+ VAR(N) E0 1 VAR 1 0.30582E+04 0.10245E-01-0.36567E-03-0.83320E+01 0.44117E-05 0.00000E+00 0.66033E+01-0.38989E-03-0.88439E+01-0.47597E-C3 E0 1 VAR 3 0.00000E+00 0.36126E-01-0.13143E-02 0.00000E+00 0.41634E-05 0.00000E+00-0.41678E+01-0.14516F-02 0.000000E+00-0.27756E-03 E0 1 VAR 4 0.66652E+02 0.11397E+01 0.88264E-03 0.41971E+00 0.1272FE-02 0.00000E+00-0.22872E+03 0.10493E-02 0.5264E+07 0.37743E-02 E0 1 VAR 5 0.00000E+00 0.86030E+00-0.31318E-03 0.00000E+00-0.1371E-03 0.00000E+00 0.22874E+03 0.47436E-03 0.00000E+00-0.57707E-C2 E0 1 VAR 5 0.00000E+00 0.86030E+00-0.31318E-03 0.00000E+00-0.1371E-03 0.00000E+00 0.22874E+03 0.47436E-03 0.00000E+00-0.57707E-C2 E0 1 VAR 5 0.00000E+00 0.86030E+00-0.31318E-03 0.00000E+00 0.355119E+00 0.22864E+01 0.10189E+00 -0.83613E+01-0.22697E-02 E0 3 VAR 1 0.00000E+00 0.10245E-01-0.36567[-03 0.00000E+00 0.14552E-05 0.00000E+00 0.10183E+02-0.38989E-03 0.00000E+00-0.62001E-C4 E0 3 VAR 3 0.30582E+04 0.36126E-01-0.13143E-02-0.29948E+02 0.85259E-C4 0.00000E+00-0.72562E+01-0.14516E-02-0.33077E+02-0.24534E-02 E0 3 VAR 4 0.23099E+03 0.11397E+01 0.84264E-03 C.14502E+01 0.43490E-02 0.00000E+00-0.5636E+02 0.10493E-02 0.10059E+01 0.12660E-C1 EC 3 VAR 5 C.00000E+00 0.86630E+00-0.313T8E-03 C.00000E+00 0.43490E-02 0.0000E+00-0.65636E+02 0.10493E-02 0.10059E+00 0.10013E-01 E0 3 A.LX+LY+LZ+RES+SPLIT=-0.28498E+02 0.39602E-02 0.00000E+00 0.34731E+01-0.31276E+02 0.69879E+00 -C+31271E+02-0.78686E-02 EO 4 VAR 1 0.00000E+00 0.10245E-01-0.36567F-03 0.00000E+00-0.13575E-04 0.00000E+00 0.11349F+03-0.30989F-03 0.00000E+00-0.17672E-C2 C0 4 VAR 3 0.00000E+00 0.36126E-01-0.13143E-02 0.00000E+00 0.53734E-03 0.00000E+00 0.11349F+03-0.34516E-02 0.0000E+0C-C.27944F-61 EO 4 VAR 4 0.65012E+04 0.11397E+01 0.84264F-03 0.40016E+02 0.77908E-04 0.00000E+00 0.66599E-01 0.10493E-02 0.50026E+02 0.4E349E-03 C0 4 VAR 5 0.00000E+00 0.860130E+00-0.31138F_03 0.00000E+00 0.00000E+00 0.66599E-01 0.10493E-02 0.50026E+02 0.4E349E-03 C0 4 VAR 5 0.00000E+00 0.860136E+02 0.66167E-03 0.00000E+00 0.5616102-0.23327E-01 EO 5 VAR 1 0.00000E+00 0.10245E-01-0.3567E-03 0.00000E+00 0.66721E-03 0.00000E+00 0.00000E+00 0.11366E+02-0.38989E-03 0.00000E+00 0.5503E-02 C0 5 VAR 3 0.00000E+00 0.36126E-01-0.3567E-03 0.00000E+00 0.66721E-03 0.00000E+00 0.0000E+00 0.11366E+02-0.38989E-03 0.00000E+00-0.15035E-02 EO 5 VAR 3 0.30000E+00 0.36126E-01-0.31138E-02 0.00000E+00 0.66721E-03 0.00000E+00 0.0000E+00 0.11366E+03-0.1368E+03-0.14516E-32 0.00000E+00 0.0000E+00 0.01368E+03-0.01493E+02 0.014749E+02 0.014740E+02 0.0000E+00 0.03847E+01 0.047436E+03 0.014740E+03 0.00000E+00 0.03847E+01 0.047436E+03

UPSTREAH TOTAL PRESSURE - LX.PDUM 58 0.1330051209E+01

C.93176E *00 J.A2653E*00 U.976A6E*00 J.A2653E*00 O.10670E*01 O.108652*01 O.13201E*01 O.13242*01 O.13241E*01 O.13746E*01 O.15940E*01 O.13746E*01 O.14*50E*01 O.13522E*01 O.14*50E*01 O.13552E*01 C.84721E*00 O.886231E*00 C.84721E*00 O.97633E*00	$\begin{array}{c} 0.978895 * 00 & 0.976325 * 00 & 0.973495 * 00 \\ 0.665865 * 00 & 0.663765 * 00 & 0.607255 * 00 \\ 0.985045 * 01 & 0.897565 * 01 & 0.994715 * 00 \\ 0.10665 * 01 & 0.113245 * 01 & 0.113805 * 01 \\ 0.135705 * 01 & 0.135565 * 01 & 0.138255 * 01 \\ 0.41305 * 01 & 0.155945 * 01 & 0.162255 * 01 \\ 0.45795 * 01 & 0.1355945 * 01 & 0.162255 * 01 \\ 0.465795 * 01 & 0.13855 * 01 & 0.13235 * 01 \\ 0.465795 * 01 & 0.13855 * 01 & 0.130375 * 01 \\ 0.46855 * 01 & 0.13855 * 01 & 0.130375 * 01 \\ 0.467755 * 00 & 0.84885 * 00 & 0.78485 * 00 \\ 0.877755 * 00 & 0.894855 * 00 & 0.996955 * 00 \\ 0.877755 * 00 & 0.894855 * 00 & 0.996955 * 00 \\ 0.877755 * 00 & 0.894855 * 00 & 0.996955 * 00 \\ 0.896105 * 00 & 0.894855 * 00 & 0.996725 * 00 \\ \end{array}$	0 .62637E +00 0.70400E +00 0.46327E +0 0 .10012E +01 0.1211E +01 0.1227E +0 0 .11849E +01 0.12124E +01 0.12401E +0 0 .13762E +01 0.16503E +01 0.16347E +0 0 .16449E +01 0.16503E +01 0.16337E +0 0 .13427E +01 0.15084E +01 0.12997E +0 0 .96281E +00 0.91366E +00 0.88225E +0 0 .78855E +00 0.79540E +00 0.80615E +0 0 .9139E +00 0.91346E +00 0.94035E +0 0 .9138E +00 0.91346E +00 0.94035E +0 0 .9148E +00 0.9146E +00 0.9405E +00 0.9405E +00 0.9405E +00 0.945E +00 0.955E +00 0.95	0.+5645;+00 0.+6444;+00 0.10349;+01 0.10497;+01 0.12649;+01 0.12952;+01 0.14115;+01 0.14066;+01 0.14622;51;+01 0.14066;+01 0.1497;2;+01 0.12746;+01 0.12681;+01 0.12746;+01 0.05505;*00 0.82759;±00 0.0533;+00 0.82759;±00
0.49400E-03 0.47193E-03 0.35802E-03 0.35584E-03 0.51433E-03 0.51434E-03 0.21786E-03 0.51434E-03 0.33P03E-03 0.51991E-03 0.14556E+00 0.51991E-03 0.52724E-01 0.49892E-01 0.30354E-03 0.28617E-03 0.27159E-02 0.27116E-02 0.27156E-02 0.27190E-03 0.27156E-02 0.77952E-03	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	0 41003E-03 0.39481E-03 0.37769E-0 0.51427E-03 0.51429E-03 0.37769E-0 0.33593E-03 0.33593E-03 0.33593E-0 0.33684E-03 0.33597E-03 0.33731E-0 0.23265E+00 0.23581E+00 0.25356E+0 0.70404E-01 0.67359E-01 0.635255F-0 0.41196E-01 0.39894E-01 0.38938E-0 0.41196E-03 0.93446E-01 0.38938E-0 0.27123E-02 0.27129E-02 0.27132E-0 0.27123E-02 0.27129E-02 0.27132E-0 0.18167E-02 0.18291E-02 0.27132E-0	0.536111-03 0.335002-03 0.514312-03 0.514332-03 0.217862-03 0.217862-03 0.337552-03 0.337792-03 0.563962-00 0.143862+00 0.598602-01 0.562932-01 0.367862-03 0.318112-03 0.62316-02 0.271502-02 0.271402-02 0.271502-02
0.58172E+01 0.550470E+01 0.73017E+01 0.73095E+0 0.888211E+01 0.93577E+0 0.13(23E+02 0.13631E+0 0.2205E+02 0.12351E+0 0.2205E+02 0.23915E+0 0.2205E+02 0.26156E+0 0.26945E+02 0.26156E+0 0.14101E+02 0.12444E+0 0.39460E+01 0.41475E+0 0.39460E+01 0.52470E+0 + TIME STEP NO. 10	0.55976E+01 0.56207E+01 0.57006E+01 0.29843E+01 0.39358E+01 0.46576E+01 0.71869E+01 0.71686E+01 0.71689E+01 0.71869E+01 0.71686E+01 0.71689E+01 0.71869E+01 0.71686E+01 0.71686E+01 0.71869E+01 0.71686E+01 0.71686E+01 0.71869E+01 0.71686E+02 0.711258E+02 0.712693E+02 0.71500E+02 0.711258E+02 0.72693E+02 0.71500E+02 0.71797E+02 0.72693E+02 0.71599E+01 0.7074E+01 0.72693E+02 0.71599E+01 0.72758E+01 0.72693E+02 0.71599E+02 0.71797E+02 0.72693E+02 0.71599E+02 0.72758E+01 0.730003E+01 0.30270E+01 0.730252E+01 0.730003E+01 0.30252E+01 0.730252E+01 0.730003E+01 0.53025E+01 0.54018E+01 0.730003E+01 0.53265E+01 0.54018E+01 0.745455E+01 0.746455E+01 0.746455E+01 0.7474550E+02 0.73238E+0 0.746455E+01	0.35583E.01 0.364N3E.01 0.58036E.0 0.72722E.01 0.7599E.01 0.76009F.0 0.1285T.02 0.12856E.02 0.12870E.0 0.20076E.02 0.20374E.02 0.2257E.0 0.20076E.02 0.20570E.02 0.12870E.0 0.25733E.02 0.26543E.02 0.1320F.0 0.2162E.02 0.20570E.02 0.1920IE.0 0.56254E.01 0.4072F.01 0.35538E.0 0.417252E.01 0.4805E.01 0.5487E.0 0.546364.01 0.5465E.01 0.5487E.0 0.5465E.01 0.5465E.01 0.5587E.0 0.5465E.01 0.5465E.01 0.5587E.0 0.5465E.01 0.5465E.01 0.5587E.0 0.5465E.01 0.5465E.01 0.5587E.0 0.5485E.01 0.5465E.01 0.5587E.0 0.5485E.01 0.5465E.01 0.5587E.0 0.5485E.01 0.5465E.01 0.5587E.0 0.5485E.01 0.5465E.01 0.5587E.0 0.5485E.01 0.5465E.01 0.5587E.0 0.5485E.01 0.5465E.01 0.55587E.0 0.5485E.01 0.5545E.00 0.55587E.0 0.5485E.00 0.5485E.00 0.55587E.0 0.5485E.00 0.5485E.00 0.5545E.00 0.55587E.0 0.5485E.00 0.5485E.00 0.55587E.00 0.5587E.00 0.587E.00 0	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

J *** FORCE COEFFICIENTS ***

A/DT+DVAR+ L1+(DV-DV+

EU 1 VAR 1 0.30630E+04 0.95501E-02-0.29196E-03-0.66629E+01 0.19765E-05 0.00000E+00 0.35696E+01-0.31672E-03-0.72279E+01-0.36200E-03 EQ 1 VAR 3 0.00000E+00 0.33638E-01-0.10613E-02 0.00000E+00 0.25861E-05 C.000000E+00-0.31308E+01-0.11512E-02 0.000000E+00-0.16807E-03 EQ 1 VAR 4 0.62344E+02 0.11414E+01 0.69671E-03 0.32362E+00 0.10670E-02 0.00000E+00-0.1790E+03 0.6751F-03 0.37932E+00 0.27864E-02 EQ 1 VAR 5 0.60000E+00 0.65572E+00-0.24310E-03 0.0000E+00-0.1531E-03 0.0000E+00 0.1790E+03 0.35383E-03 0.00000E+00-0.37864E-02 EQ 1 VAR 5 0.60000E+00 0.65572E+00-0.24310E-03 0.0000E+00-0.13512E-03 0.0000E+00 0.48057E-03 0.00000E+00-0.3528E-02 EQ 1 VAR 5 0.60000E+00 0.65572E+00 0.0000E+00 0.53865E+00-0.68398E+01 0.48057E-01 -0.68296F+01-0.16970E-02

E0 4 VAR 1 0.00000E+00 0.95501E-02-0.29196E-03 0.00000E+00-0.13264E-04 0.00000E+00 0.92496E+02-0.31672E-03 0.00000E+00-0.14340E-02 EQ 4 VAR 3 0.000006+00 0.3363E-01-0.10613E-02 0.00000E+00 0.3369E-03 0.00000E+00 0.45007E-01 0.85751E-03 0.4153E+00-0.1512E-03 0.4153E+02-0.10000E+00 0.45007E-01 0.85751E-03 0.4153E+00-0.15727E-01 EQ 4 VAR 4 0.65012E+04 0.05000E+00 0.45007E+01 0.85751E-03 0.4153E+02 0.0000E+00 0.4000E+00 0.45007E+01 0.85751E-03 0.4153E+02 0.0000E+00 0.4000E+00 0.45007E+01 0.45358E+02 0.04153E+02 0.0000E+00 0.4000E+00 0.455012E+01 0.45551E+02 0.4153E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.415E+02 0.415E+02 0.4155E+02 0.4155E+02 0.4155E+02 0.

СP

	STEP = 0.	VEL V-VEL 0000 0.0000 0.00000 0.00000 0.0000 0.0000 0.0000 0	U-VEL	DENSITY	ENTHALPY	TEM₽	MFRAC
ORESTART DUM	P STARTED AT TI	ME STEP 10	UNIT NO. = 2	0 RESTART N	0. = 1		
JINLET TOTAL	AND STATIC PRE	SSURE = 0.166	500E+01 0.1001	2E+01			
N0.	x	¥	CP	н	•		
12345678901234567890123456789012345678901234 1111111222222222223333333333344444	$\begin{array}{c} 0 & 9355869E * 00\\ 0 & 9452429E * 00\\ 0 & 9452429E * 00\\ 0 & 9540125E * 00\\ 0 & 9619697E * 00\\ 0 & 9619697E * 00\\ 0 & 9750045E * 00\\ 0 & 9750045E * 00\\ 0 & 9816531E * 00\\ 0 & 99750554E * 00\\ 0 & 9976755055E * 00\\ 0 & 997675555E * 00\\ 0 & 975555E * 00\\ 0 & 975555E * 00\\ 0 & 9755552E * 00\\ 0 & 97555552E * 00\\ 0 & 975555552E * 00\\ 0 & 975555552E * 00\\ 0 & 9755555552E * 00\\ 0 & 975555552E * 00\\ 0 & 9755555555555555550\\ 0 & 97555555555555555550\\ 0 & 9755555555555555555555555555555555555$	$\begin{array}{c} -0.2439649E*00\\ -0.2106832E*00\\ -0.2106832E*00\\ -0.12106832E*00\\ -0.121904E*00\\ -0.121904E*00\\ -0.1239041E*00\\ -0.1239041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.129041E*00\\ -0.1133070E*01\\ -0.1133070E*01\\ -0.1133070E*01\\ -0.11078E*01\\ -0.110796*01\\ -0.11078E*01\\ -0.1207945E*01\\ -0.1205510E*00\\ -0.1205510E*00\\ -0.1205510E*00\\ -0.32037897E*00\\ -0.32037897E*00\\ -0.32037897E*00\\ -0.32037897E*00\\ -0.32037897E*00\\ -0.32037897E*00\\ -0.5384287E*00\\ -0.5384231E*00\\ -0.5384231E*00\\ -0.5384231E*00\\ -0.5384231E*00\\ -0.5384231E*00\\ -0.5384231E*00\\ -0.5384231E*00\\ -0.5894231E*00\\ -0.5991665589E*00\\ -0.5991665580E*00\\ -0.5991665580E*00\\ -0.5991665580E*00\\ -0.5991665580E*00\\ -0.5991665580E*00\\ -0.599160255900\\ -0.5991665580E*00\\ -0$	$\begin{array}{c} 0.59278581 \pm 0.0\\ 0.5913002 \pm 0.0\\ 0.58969502 \pm 0.0\\ 0.58969502 \pm 0.0\\ 0.58872732 \pm 0.0\\ 0.58672732 \pm 0.0\\ 0.5872732 \pm 0.0\\ 0.596713342 \pm 0.0\\ 0.5643014 \pm 0.0\\ 0.5643014 \pm 0.0\\ 0.5643014 \pm 0.0\\ 0.5643014 \pm 0.0\\ 0.56531340 \pm 0.0\\ 0.57631340 \pm 0.0\\ 0.5763122 \pm 0.0\\ 0.5763122 \pm 0.0\\ 0.57932 \pm 0.0\\ 0.59932 + 0.0\\ 0.59932 \pm 0.0\\ 0.59932 \pm 0.0\\ 0.56332 \pm 0.0\\ 0.56332 \pm 0.0\\ 0.5633 \pm 0.0\\ 0.5753 \pm 0.0\\ 0.5753$	$\begin{array}{c} 0.55773651 \\ 0.5579494 \\ 0.559760671 \\ 0.559760671 \\ 0.559760671 \\ 0.559760671 \\ 0.5597606296 \\ 0.5571994562 \\ 0.5571994562 \\ 0.5571994562 \\ 0.5571994562 \\ 0.5571970 \\ 0.557170 \\ 0.557170 \\ 0.557711 \\ 0.57711$	11 11 11 11 11 11 11 11 11 11		

Table VII.	(cont)
------------	--------

44444555555555555566666777777777778888888889999999999	$\begin{array}{c} 0 \cdot \mathbf{3822039E+00} \\ 0 \cdot \mathbf{3391456E+00} \\ 0 \cdot \mathbf{2952472E+00} \\ 0 \cdot \mathbf{195225E-01} \\ 0 \cdot \mathbf{19525E+00} \\ 0 \cdot \mathbf{19555E+00} \\ 0 \cdot \mathbf{19555E+00} \\ 0 \cdot \mathbf{19555E+00} \\ 0 \cdot \mathbf{1955E+00} \\ 0 \cdot \mathbf{19555E+00} \\ \mathbf$	$\begin{array}{c} -0 &+ 1 01 92786 \pm 01 \\ -0 &+ 1 12 1386 \pm 01 \\ -0 &+ 1 12 1386 \pm 01 \\ -0 &+ 1 12 1386 \pm 01 \\ -0 &+ 1 13 30 396 \pm 01 \\ -0 &+ 12 286622 \pm 01 \\ -0 &+ 12 61 0866 \pm 01 \\ -0 &+ 12 7625 \pm 01 \\ -0 &+ 13 7655 \pm 01 \\ -0 &+ 13 577 \pm 01 \\ -0 &+ 15 3577 \pm 01 \\ -0 &+ 15 30770 \pm 01 \\ -0 &+ 16 50150 \pm 01 \\ -0 &+ 15 5077890 \pm 16 \pm 01 \\ -0 &+ 15 5077890 \pm 16 \pm 01 \\ -0 &+ 15 5077890 \pm 16 \pm 01 \\ -0 &+ 13 507780 \pm 01 \\ -0$	$\begin{array}{c} 0 & 8 & 3 & 25 & 67 & 7E \\ \bullet & 0 & 0 \\ 0 & 8 & 4 & 17 & 22 & 12 & 12 \\ \bullet & 0 & 0 \\ 0 & 8 & 8 & 17 & 12 & 21 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 02 & 43 & 52 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 02 & 43 & 52 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 02 & 43 & 52 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 03 & 79 & 97 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 03 & 79 & 97 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 03 & 79 & 97 \\ \bullet & 0 & 0 \\ 0 & 8 & 5 & 13 & 50 & 12 \\ \bullet & 0 & 0 \\ 0 & 9 & 75 & 91 & 55 & 90 & 02 \\ \bullet & 0 & 0 & 76 & 55 & 90 & 02 \\ \bullet & 0 & 97 & 91 & 55 & 91 & 02 \\ \bullet & 0 & 0 & 97 & 91 & 55 & 91 & 02 \\ \bullet & 0 & 0 & 97 & 91 & 55 & 91 & 02 \\ \bullet & 0 & 0 & 97 & 91 & 55 & 91 & 02 \\ \bullet & 0 & 97 & 91 & 65 & 54 & 2 & 00 \\ 0 & 97 & 91 & 65 & 54 & 2 & 00 \\ 0 & 97 & 91 & 65 & 54 & 2 & 00 \\ 0 & 97 & 91 & 34 & 77 & 55 & 2 & 00 \\ 0 & 97 & 91 & 34 & 77 & 55 & 2 & 00 \\ 0 & 97 & 91 & 34 & 77 & 55 & 2 & 00 \\ 0 & 97 & 91 & 34 & 77 & 55 & 2 & 00 \\ 0 & 79 & 71 & 26 & 55 & 26 & 2 & 00 \\ 0 & 78 & 76 & 34 & 57 & 62 & 2 & 00 \\ 0 & 78 & 76 & 34 & 57 & 62 & 2 & 00 \\ 0 & 78 & 76 & 34 & 57 & 62 & 2 & 00 \\ 0 & 78 & 76 & 34 & 57 & 62 & 2 & 00 \\ 0 & 78 & 76 & 34 & 57 & 62 & 2 & 00 \\ 0 & 78 & 76 & 34 & 57 & 62 & 2 & 00 \\ 0 & 77 & 97 & 29 & 32 & 28 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 00 \\ 0 & 77 & 37 & 29 & 32 & 28 & 00 \\ 0 & 77 & 37 & 37 & 48 & 28 & 00 \\ 0 & 57 & 37 & 48 & 37 & 48 & 48 & 20 & 00 \\ 0 & 57 & 47 & 37 & 48 & 20 & 00 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 97 & 78 & 000 & 0 \\ 0 & 57 & 0 & 00 & 57 & 0 \\ 0 & 57 & 0 & 00 & 57 & 0 \\ 0 & 57 & 0 & 00 & 57 & 0 \\ 0 & 57 & 0 & 00 & 57 & 0 \\ 0 & 57 & 0 & 0 & 57 & 0 \\ 0 & 57 & 0 & 0 & 0 & 0 \\ 0 & 57 & 0 & 0 & 0 & 0 \\ 0 & 57 & 0 & 0 & 0 & 0 \\ 0 & 57$	$\begin{array}{c} 0.1289714E+02\\ 0.11895706E+02\\ 0.11875706E+02\\ 0.11875706E+02\\ 0.1285706E+02\\ 0.1286724E+02\\ 0.1286724E+02\\ 0.12361996102\\ 0.12361996102\\ 0.12361996102\\ 0.12361996102\\ 0.12361996102\\ 0.12097622E+02\\ 0.2207622E+02\\ 0.2207622E+02\\ 0.2207622E+02\\ 0.220752E+02\\ 0.220752E+02\\ 0.220752E+02\\ 0.22391472E+02\\ 0.22381792E+02\\ 0.22381792E+02\\ 0.223817932E+02\\ 0.223817932E+02\\ 0.2238172E+02\\ 0.2238132E+02\\ 0.23341324E+01\\ 0.33623172E+01\\ 0.33652176E+01\\ 0.33652261022E+01\\ 0.33652176E+01\\ 0.33652261022E+01\\ 0.33652176E+01\\ 0.33652261022E+01\\ 0.33652261022E+01\\ 0.3365226000000000000000000000000000000000$	
105 106 107 108 109 110	0.6818847E+00 0.7010515E+00 0.7200347E+00 0.7308130E+00 0.7573222E+00 0.7755158E+00	-0.1015092E+01 -0.90611662E+00 -0.9068832E+00 -0.8525126E+00 -0.7983123E+00 -0.7983123E+00 -0.74454635+00	0.5463556E+00 0.5541110E+00 0.5611225E+00 0.5680881E+00 0.5743540E+00 0.5797800E+00	0.4612996E+01 0.4725260E+01 0.4806876E+01 0.4898860E+01 0.4898860E+01	

ORESTART DUMP COMPLETED AT TIME STEP 10 UNIT NO. = 10 RESTART NO. = 1

.

ORESULTS AT TSTEP NO. 10 TTIME = 0.312376E+01

***** U-VL. *****

	0-VI.						_			10
L Z = Z =	c.000000E+000	2.0000000E+000	.000000E+000	.000000E+000	.000000E+000	000000E+000	•000000E+000	•000000E+000	•000000E+000.	000000000000
29976543210987654321099876543210987654321098777777777777777777777777777777777777		$\begin{array}{c} 0 & 9, 2, 3, 3, 4, 4 \\ 0 & 9, 2, 3, 3, 4, 4 \\ 0 & 9, 2, 4, 9, 2 \\ 0 & 0, 9, 2, 4, 9, 2 \\ 0 & 0, 9, 2, 4, 1, 2, 4 \\ 0 & 0, 9, 2, 4, 1, 2, 4 \\ 0 & 0, 9, 2, 4, 1, 2, 4 \\ 0 & 0, 9, 2, 4, 1, 2, 4 \\ 0 & 0, 9, 1, 4, 3, 4 \\ 0 & 0, 9, 1, 4, 3, 4 \\ 0 & 0, 9, 1, 4, 3, 4 \\ 0 & 0, 9, 1, 4, 3, 4 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 8, 1, 4, 5 \\ 0 & 0, 1, 4, 5 \\ 0 & 0, 1, 4, 5 \\ 0 & 0, 1, 4, 5 \\ 0 & 0, 1, 4, 5 \\ 0 & 0, 5 \\ 0 & 0, 5 \\ 0 & 0$	$\begin{array}{c} 0.2 + 3/12 = 0 \\ 0.1 + 3/12 = 0 \\$	$\begin{array}{c} 0 & 4 & 6 & 1 & 3 & 1 & 6 & 1 \\ 0 & 4 & 6 & 1 & 3 & 1 & - & 0 & 1 \\ 0 & 4 & 6 & 1 & 3 & 1 & - & 0 & 1 \\ 0 & 4 & 6 & 0 & 5 & 0 & 1 \\ 0 & 4 & 6 & 0 & 5 & 0 & 1 \\ 0 & 4 & 6 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & - & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & - & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & - & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & - & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & - & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & - & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 5 & 0 & 1 \\ 0 & 4 & 5 & 0 & 5 & 0 & 5 & 0 & 5 & 0 & 1 \\ 0 & 5 & 0 & 5 & 0 & 5 & 0 & 5 & 0 & 0 \\ 0 & 5 & 0 & 5 & 0 & 5 & 0 & 0 & 0 & 0 &$	0 + 77740E - 01 0 + 7740E - 01 0 - 776380E - 01 0 - 776380E - 01 0 - 767388E - 01 0 - 76738E - 01 0 - 76738E - 01 0 - 76378E - 01 0 - 76378E - 01 0 - 775378F - 01 0 - 775378F - 01 0 - 77557978F - 01 0 - 774578F - 01 0 - 7745868E - 01 0 - 7745868F - 01 0 - 776868F - 01 0 - 12572F - 01 0 - 3771652F - 00 0 - 26413F - 00 0 - 26413F - 00 0 - 327165F - 00 0 - 4258F - 00 0 - 38713F - 00 0 - 38763F - 00 0 - 38763F - 00 0 - 38778F - 00 0 - 0	$ \begin{array}{c} 5 & 1 & 2 & 0 & 1 \\ 2 & 0 & 1 & 2 & 0 & 1 \\ 0 & 1 & 1 & 9 & 3 & 9 & 1 \\ 0 & 0 & 1 & 1 & 9 & 3 & 9 & 1 \\ 0 & 0 & 1 & 1 & 9 & 3 & 9 & 1 \\ 0 & 0 & 1 & 1 & 4 & 3 & 1 \\ 0 & 0 & 1 & 1 & 4 & 3 & 1 \\ 0 & 0 & 1 & 1 & 4 & 3 & 1 \\ 0 & 0 & 1 & 1 & 4 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 4 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 4 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 3 & 4 & 0 & 0 \\ 0 & 1 & 1 & 3 & 4 & 0 & 0 \\ 0 & 1 & 1 & 3 & 4 & 0 & 0 \\ 0 & 1 & 1 & 3 & 4 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 1 & 1 & 5 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{c} 0 & 1 & 7 & 10 & 4 & 10 & 4 & 5 \\ 0 & 1 & 7 & 0 & 10 & 4 & 5 & 10 & 4 & 5 \\ 0 & 0 & 1 & 6 & 9 & 4 & 5 & 4 & 5 & 0 & 0 \\ 0 & 1 & 6 & 9 & 4 & 5 & 4 & 5 & 0 & 0 \\ 0 & 1 & 6 & 9 & 4 & 5 & 4 & 5 & 0 & 0 \\ 0 & 1 & 6 & 5 & 5 & 6 & 4 & 4 & 0 & 0 \\ 0 & 1 & 6 & 5 & 5 & 6 & 4 & 4 & 0 & 0 \\ 0 & 1 & 6 & 5 & 5 & 6 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 6 & 10 & 10 & 4 & 0 & 0 \\ 0 & 1 & 10 & 10 & 10 & 10 & 1$	$0 = 21^{9} 02E + 600$ $0 = 21^{9} 02E + 600$ $0 = 21^{9} 02E + 600$ $0 = 21^{5} 04E + 600$ $0 = 21^{5} 04E + 600$ $0 = 21^{5} 04E + 600$ $0 = 20^{5} 04E + 600$ $0 = 22^{5} 146E + 600$ $0 = 23^{5} 14E + 600$ $0 = 43^{5} 15E + 600$ $0 = 7^{5} 16E + 600$ $0 = 7^{5} 16E + 600$ $0 = 43^{5} 15E + 600$	0.24129E + 00 0.231730E + 00 0.23730E + 00 0.23574E + 00 0.23574E + 00 0.23575E + 00 0.23575E + 00 0.23575E + 00 0.24555E + 00 0.24555E + 00 0.24555E + 00 0.2555E + 00 0.33827E + 00 0.33825E + 00 0.33825E + 00 0.55045E + 00 0.59255E + 00 0.79255E + 00 0.64775E + 00 0.64775E + 00 0.6565E + 00 0.64775E + 00 0.6565E + 00 0.6565E + 00 0.664775E + 00 0.66475E + 00 0.59655E + 00 0.6655E + 00 0.6555E + 00 0.5555E + 00 0.555E + 00	$\begin{array}{c} 1, 2, 7, 7, 4, 7, 1 \\ + 1, 0 \\ 0 \\ 0 \\ - 2, 7, 7, 3, 9, 1 \\ + 2, 0 \\ 0 \\ - 2, 7, 7, 3, 9, 1 \\ + 2, 0 \\ 0 \\ - 2, 7, 3 \\ - 2, 7, 3 \\ - 2, 7, 3 \\ - 2, 7, 3 \\ - 2, 7, 3 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 3, 0 \\ - 2, 2 \\ - 2, 6 \\ - 2, 0 \\ - 2, 2 \\ - 2, 6 \\ - 2, 0 \\ - 2, 2 \\ - 2, 0 \\ $

107

Table VII. (cont)

4444444444333333333332222222222111111111	$\begin{array}{c} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 $	$\begin{array}{c} 0.789 C6E - 01 \\ 0.1480 C6E - 01 \\ 0.1363 75E + 00 \\ 0.1363 75E + 00 \\ 0.1363 75E + 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1376 - 01 \\ 0.1377 - 02 - $	$\begin{array}{c} 0.24285640 & 0.35410640 \\ 0.23454640 & 0.35410640 \\ 0.23454640 & 0.35480664 \\ 0.23454640 & 0.344067 \\ 0.23454640 & 0.344067 \\ 0.23456664 & 0.03440664 \\ 0.23456664 & 0.032831640 \\ 0.2285664 & 0.00 \\ 0.2285664 & 0.00 \\ 0.2285664 & 0.00 \\ 0.2285664 & 0.00 \\ 0.2285664 & 0.00 \\ 0.2285664 & 0.00 \\ 0.228564 & 0.00 \\ 0.2285564 & 0.00 \\ 0.228564 & 0.00 \\ 0.2285564 & 0.00 \\ 0.2285564 & 0.00 \\ 0.2285564 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.2862534 & 0.00 \\ 0.286254 & 0.00$	0 • 661622 • C0 0 • 540032 • 0 0 • 552822 • C0 0 • 554764 • 0 0 • 552822 • C0 0 • 554764 • 0 0 • 4552822 • C0 0 • 554764 • 0 0 • 4552822 • C0 0 • 554764 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 00 0 • 551351 • 0 0 • 44348 • 0 0 • 3511 • 0 0 • 3548 • 0 0 • 0 • 5548 • 0 0 • 0 • 0 • 0 0 • 0 • 0 • 0 0 • 0 •	$ \begin{array}{c} 0 & 0.5541891\pm00 & 0.600331\pm00 \\ 0 & 0.5743781\pm(0.00595011\pm00) \\ 0 & 0.5743781\pm(0.00574518\pm00) \\ 0 & 0.565971\pm00 & 0.574531\pm00 \\ 0 & 0.56471\pm00 & 0.574521\pm00 \\ 0 & 0.56471\pm00 & 0.574521\pm00 \\ 0 & 0.56471\pm00 & 0.554721\pm00 \\ 0 & 0.54721\pm00 & 0.554721\pm00 \\ 0 & 0.54711\pm00 & 0.526781\pm00 \\ 0 & 0.54791\pm00 & 0.526781\pm00 \\ 0 & 0.48911\pm00 & 0.51171\pm00 \\ 0 & 0.48911\pm00 & 0.4897351\pm00 \\ 0 & 0.489791\pm00 & 0.4897311\pm00 \\ 0 & 0.439791\pm00 & 0.4897311\pm00 \\ 0 & 0.3394871\pm00 & 0.4811714\pm00 \\ 0 & 0.359151\pm00 & 0.3783215\pm00 \\ 0 & 0.359151\pm00 & 0.3783515\pm00 \\ 0 & 0.359151\pm00 & 0.037848515\pm00 \\ 0 & 0.359151\pm000 & 0.3578515\pm00 \\ 0 & 0.390551\pm000 & 0.3578515\pm00 \\ 0 & 0.390551\pm000 & 0.3785515\pm00 \\ 0 & 0.390551\pm000 & 0.3785515\pm00 \\ 0 & 0.390551\pm000 & 0.3785515\pm00 \\ 0 & 0.390551\pm000 & 0.378551\pm00 \\ 0$
L Z = Z =	0.000000E+000.000000E+0	13 00.0000000000000000000000000000000000	15 10.000000E+000.000000E+00	17 00.000000E+000.000000E+0	19 100.000000E+000.000000E+00
120 1198 1116 1116 1114 1112 100 100 100 100 100 100 100 100 10	$ \begin{array}{c} U_{-2} & 485 \\ 2 & 485 \\ 3 & 75 \\ 5 \\ 6 & 0 \\ 2 & 87 \\ 3 & 75 \\ 5 \\ 6 & 0 \\ 2 & 88 \\ 4 & 11 \\ 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5 \\ 6 & 0 \\ 2 & 88 \\ 8 & 5$	$ \begin{array}{c} 0 & 0.281 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 777 \\ 0 & 0.290 \\ 777 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 \\ 0 & 0.290 \\ 177 $	$\begin{array}{c} 0 & 2.286 + 12 \pm 00 & 0 & 2.85 + 04 \pm 01 \\ 0 & 2.87 + 12 \pm +00 & 0 & 2.83 + 04 \pm 01 \\ 0 & 0 & 2.73 + 11 \pm \pm 00 & 0 & 2.89 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.99 + 04 \pm 01 \\ 0 & 2.73 + 00 & 0 & 2.84 + 05 \pm 01 \\ 0 & 0 & 2.94 + 00 & 0 & 2.84 + 05 \pm 01 \\ 0 & 0 & 2.84 + 00 & 0 & 2.84 + 05 \pm 01 \\ 0 & 0 & 2.84 + 00 & 0 & 2.84 + 05 \pm 01 \\ 0 & 0 & 2.84 + 00 & 0 & 2.84 + 05 \pm 01 \\ 0 & 0 & 2.94 + 00 & 0 & 2.91 + 04 \pm 01 \\ 0 & 0 & 3.07 + 00 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 3.07 + 05 \pm 00 \\ 0 & 0 & 3.07 + 00 & 0 & 0 & 0 & 0 & 0 + 02 \pm 01 \\ 0 & 0 & 0 & 3.07 + 0 & 0 & 0 & 0 & 0 & 0 + 0 & 0 + 0 \\ 0 & 0 & 3.07 + 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 0 & 2 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

60 L

Table VII. (cont)

132 111 9 8 7 5 5 3 2	$\begin{array}{c} 0 & 1 & 78655 \\ 0 & 0 & 18555 \\ 0 & 208955 \\ 0 & 208955 \\ 0 & 262745 \\ 0 & 255195 \\ 0 & 0 & 255195 \\ 0 & 0 & 252315 \\ 0 & 0 & 0 \\ 0 & 258395 \\ 0 & 0 & 0 \\ 0 & 26335 \\ 0 & 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 26335 \\ 0 & 0 \\ 0 & 27322 \\ 0 & 0 \\ 0 & $	$\begin{array}{c} 0.18313 \pm 0.0\\ 0.19852 \pm 0.0\\ 0.21214 \pm 0.0\\ 0.26426 \pm 0.0\\ 0.27829 \pm 0.0\\ 0.25619 \pm 0.0\\ 0.2559 5 \pm 0.0\\ 0.2539 5 \pm 0.0\\ 0.26511 \pm 0.0\\ 0.26511 \pm 0.0\\ 0.27503 \pm 0.0\\ \end{array}$	$\begin{array}{c} -0.36949E+00.\\ -0.42731E-01-\\ 0.18649E+00\\ 0.20106E+00\\ 0.21410E+00\\ 0.2459E+00\\ 0.2559E+00\\ 0.2559E+00\\ 0.2559E+00\\ 0.2559E+00\\ 0.2559E+00\\ 0.26538E+00\\ 0.26538E+00\\ 0.27517E+00\\ 0.27517E+0\\ 0.27517E+0$	$\begin{array}{c} 0 & 1 & 8 & 9 & 1 & 8 & \epsilon & 0 & 0 \\ 0 & 2 & 0 & 0 & 7 & \epsilon & 0 & 0 \\ 0 & 2 & 1 & 5 & 6 & 9 & \epsilon & 0 & 0 \\ 0 & 2 & 1 & 5 & 5 & 1 & 6 & 0 & 0 \\ 0 & 2 & 5 & 5 & 3 & 1 & \epsilon & 0 & 0 \\ 0 & 2 & 5 & 5 & 3 & 4 & \epsilon & 0 & 0 \\ 0 & 2 & 5 & 5 & 3 & 4 & \epsilon & 0 & 0 \\ 0 & 2 & 6 & 0 & 2 & 6 & 0 & 1 \\ 0 & 2 & 6 & 0 & 1 & 8 & 1 & 0 \\ 0 & 2 & 7 & 0 & 0 & 1 & 0 & 1 \\ 0 & 2 & 7 & 4 & 9 & 0 & 0 \\ \end{array}$	$\begin{array}{c} 0.19129 \in 100\\ 0.20124 \in 100\\ 0.201732 \in 100\\ 0.26605 \in 100\\ 0.27621 \in 100\\ 0.25450 \in 100\\ 0.255950 \in 100\\ 0.25992 \in 100\\ 0.25992 \in 100\\ 0.26478 \in 100\\ 0.26963 \in 100\\ 0.26963 \in 100\\ 0.27435 (0.2755 + 00\\ 0.27435 (0.2755 + 00\\ 0.27435 (0.2755 + 00\\ 0.2755 (0.2755 + 00\\ $	$\begin{array}{c} 0 & 1 & 9 & 3 & 0 & 7 & 4 & 8 & 0 \\ 0 & 2 & 0 & 1 & 9 & 5 & 5 & 4 & 0 \\ 0 & 2 & 1 & 9 & 2 & 5 & 2 & 8 & 0 \\ 0 & 2 & 2 & 5 & 8 & 9 & 4 & 8 & 0 \\ 0 & 2 & 2 & 5 & 3 & 4 & 1 & 4 & 0 \\ 0 & 2 & 5 & 2 & 3 & 5 & 4 & 0 & 0 \\ 0 & 2 & 5 & 9 & 2 & 3 & 5 & 4 & 0 \\ 0 & 2 & 5 & 9 & 2 & 3 & 5 & 5 & 4 & 0 \\ 0 & 2 & 6 & 4 & 0 & 7 & 4 & 0 \\ 0 & 2 & 6 & 4 & 0 & 7 & 4 & 0 \\ 0 & 2 & 6 & 8 & 9 & 4 & 0 \\ 0 & 2 & 6 & 8 & 9 & 4 & 0 \\ 0 & 2 & 3 & 5 & 5 & 4 & 0 \\ \end{array}$	$\begin{array}{c} 0.17560 \pm 0.0\\ 0.20273 \pm 0.0\\ 0.20273 \pm 0.0\\ 0.22210 \pm 0.0\\ 0.22129 \pm 0.0\\ 0.251190 \pm 0.0\\ 0.251190 \pm 0.0\\ 0.251198 \pm 0.0\\ 0.258198 \pm 0.0\\ 0.26289 \pm 0.0\\ 0.26765 \pm 0.0\\ 0.26765 \pm 0.0\\ 0.27220 \pm 0.0\\ \end{array}$	$\begin{array}{c} 0.20175E+00\\ 0.20847E+00\\ 0.20847E+00\\ 0.22712E+00\\ 0.26350E+00\\ 0.25519E+00\\ 0.25519F+00\\ 0.255109E+00\\ 0.25670E+00\\ 0.26576E+00\\ 0.26576E+00\\ 0.26576E+00\\ 0.2252E+00\\ 0.27022E+00\\ \end{array}$	$\begin{array}{c} 0.21 + 0.4 \in \cdot 0.0\\ 0.22 + 0.0 \in \cdot 0.0\\ 0.23 + 0.0 \in \cdot 0.0\\ 0.26 + 0.0 \in \cdot 0.0\\ 0.26 + 0.0 \in \cdot 0.0\\ 0.25 + 0.0 \in \cdot 0.0\\ 0.26 + 0.0 \in \cdot 0.0\\$	$\begin{array}{c} 0.23305E+00\\ 0.24306E+0C\\ 0.25604E+00\\ 0.25604E+00\\ 0.27053E+00\\ 0.26523E+00\\ 0.26523E+00\\ 0.26535E+00\\ 0.26535E+00\\ 0.26576E+00\\ 0.2753E+00\\ 0.27553E+00\\ 0.27553E+00\\ \end{array}$
LZ= Z=	C.U00000E+00	0.000000E+00	23 0.000000E+000	24 0.000000E+000	25 .000000E+000	.000000E+000	27 0.000000E+001	28 • 000000E+000	29 • 00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	30 30
120 119 1116 1115 1115 1115 1115 1115 1117 1109 1007 1007 1007 1007 1007 1007	$\begin{array}{c} 0 \\ c \\$	$\begin{array}{c} 0 & 27 & 79 & 23 & E & 0.0 \\ 0 & 27 & 64 & 84 & e & 00 \\ 0 & 27 & 64 & 84 & e & 00 \\ 0 & 27 & 74 & 45 & e & 00 \\ 0 & 27 & 44 & 56 & e & 00 \\ 0 & 27 & 44 & 56 & e & 00 \\ 0 & 27 & 44 & 56 & e & 00 \\ 0 & 27 & 84 & 56 & e & 00 \\ 0 & 27 & 84 & 56 & e & 00 \\ 0 & 32 & 07 & 65 & 28 & 28 \\ 0 & 37 & 77 & 38 & 28 & 28 \\ 0 & 37 & 77 & 38 & 28 & 28 \\ 0 & 37 & 77 & 38 & 28 & 28 \\ 0 & 37 & 77 & 38 & 28 & 28 \\ 0 & 37 & 47 & 37 & 28 & 28 \\ 0 & 37 & 47 & 37 & 28 & 28 \\ 0 & 37 & 47 & 37 & 28 & 28 \\ 0 & 37 & 48 & 77 & 28 & 28 \\ 0 & 38 & 48 & 28 & 28 & 28 \\ 0 & 38 & 48 & 28 & 28 & 28 \\ 0 & 38 & 48 & 28 & 28 & 28 \\ 0 & 38 & 48 & 28 & 28 & 28 \\ 0 & 38 & 48 & 48 & 28 & 28 \\ 0 & 38 & 48 & 48 & 48 & 28 \\ 0 & 38 & 48 & 48 & 48 & 48 & 48 \\ 0 & 38 & 58 & 48 & 48 & 48 & 48 \\ 0 & 38 & 58 & 48 & 48 & 48 & 48 \\ 0 & 38 & 58 & 48 & 48 & 48 & 48 \\ 0 & 38 & 58 & 48 & 48 & 48 & 48 \\ 0 & 38 & 58 & 48 & 48 & 48 & 48 \\ 0 & 38 & 48 & 48 & 48 & 48 & 48 \\ 0 & 38 & 48 & 48 & 48 & 48 & 48 \\ 0 & 38 & 48 & 48 & 48 & 48 & 48 & 48 \\ 0 & 38 & 58 & 48 & 48 & 48 & 48 & 48 \\ 0 & 38 & 48 & 48 & 48 & 48 & 48 & 48 & 48$	0+79924E+00 0+9984E+00 0+99884E+00 0+99432E+00 0+99755E+00 0+99633E+00 0+99459E+00	$ \begin{array}{c} 0 & 3 & 4 & 5 & 5 & 4 \\ 0 & 3 & 4 & 4 & 7 & 6 \\ 0 & 3 & 4 & 4 & 2 & 7 & 6 \\ 0 & 3 & 2 & 0 & 3 & 2 & 0 & 3 \\ 0 & 3 & 2 & 0 & 3 & 2 & 7 & 2 & 6 \\ 0 & 3 & 2 & 0 & 3 & 2 & 7 & 2 & 5 & 6 \\ 0 & 3 & 2 & 7 & 2 & 5 & 6 & 6 \\ 0 & 3 & 4 & 2 & 7 & 2 & 5 & 6 & 6 \\ 0 & 3 & 4 & 2 & 7 & 2 & 5 & 6 & 6 \\ 0 & 3 & 4 & 2 & 0 & 7 & 4 & 5 & 6 \\ 0 & 3 & 4 & 2 & 0 & 7 & 4 & 5 & 6 \\ 0 & 4 & 3 & 6 & 4 & 6 & 0 & 0 \\ 0 & 4 & 3 & 6 & 1 & 6 & 5 & 0 \\ 0 & 4 & 3 & 6 & 1 & 6 & 5 & 0 \\ 0 & 4 & 3 & 6 & 1 & 6 & 5 & 0 \\ 0 & 5 & 0 & 6 & 7 & 6 & 7 & 5 & 5 \\ 0 & 6 & 0 & 0 & 6 & 0 & 0 & 6 & 0 & 0 \\ 0 & 6 & 0 & 0 & 6 & 0 & 0 & 6 & 0 & 0 \\ 0 & 6 & 0 & 0 & 0 & 0 & 7 & 1 & 7 & 5 & 0 \\ 0 & - & 7 & 1 & 7 & 5 & 0 & 0 \\ 0 & - & 7 & 0 & 7 & 3 & 5 & 2 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 3 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 3 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 3 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 3 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 3 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 7 & 0 & 7 & 5 & 5 & 0 \\ 0 & - & 0 & 0 & 2 & 0 & 1 \\ 0 & - & 0 & 0 & 0 & 2 & 0 & 1 \\ 0 & - & 0 & 0 & 0 & 2 & 0 & 1 \\ 0 & - & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 & 0 & 0 \\ 0 & - & 0 & 0 $	$\dot{0} \cdot 355065 + 00$ $0 \cdot 35695 + 00$ $0 \cdot 35695 + 00$ $0 \cdot 356567 + 00$ $0 \cdot 355120 + 00$ $0 \cdot 355120 + 00$ $0 \cdot 3455206 + 00$ $0 \cdot 3455206 + 00$ $0 \cdot 34671 + 00$ $0 \cdot 41056 + 00$ $0 \cdot 41056 + 00$ $0 \cdot 41056 + 00$ $0 \cdot 49863 + 00$ $0 \cdot 49863 + 00$ $0 \cdot 49863 + 00$ $0 \cdot 53631 + 00$ $0 \cdot 53631 + 00$ $0 \cdot 62396 + 00$ $0 \cdot 62396 + 00$ $0 \cdot 67521 + 00$ $0 \cdot 67521 + 00$ $0 \cdot 67521 + 00$ $0 \cdot 97422 + 00$ $0 \cdot 97422 + 00$ $0 \cdot 97422 + 00$ $0 \cdot 97422 + 00$ $0 \cdot 97530 + 00$ $0 \cdot 979530 + 00$ $0 \cdot 97955 + 01$ $0 \cdot 1000 + 00$ 0 - 00 + 00 0	$ \begin{array}{c} 0.333605 + 0.00\\ 0.3525 + 0.00\\ 0.357625 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.377603 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49340 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.49430 + 0.00\\ 0.499450 + 0.00\\ 0.499450 + 0.00\\ 0.499450 + 0.00\\ 0.499740 + 0.00\\ 0.499740 + 0.00\\ 0.499740 + 0.00\\ 0.499740 + 0.00\\ 0.499740 + 0.00\\ 0.499740 + 0.00\\ 0.499740 + 0.00$	$\ddot{0}$ 32766 + 00 0 3436479 + 00 0 36479 + 00 0 372667 + 00 0 37267 + 00 0 3727 + 00	$\begin{array}{c} 0 & 31 & 90 & 5 \\ 0 & 33 & 61 & 5 \\ 0 & 33 & 62 & 25 \\ 0 & 53 & 62 & 25 \\ 0 & 53 & 62 & 25 \\ 0 & 54 & 95 \\ 0 & 54 & 95 \\ 0 & 54 & 95 \\ 0 & 54 & 95 \\ 0 & 54 & 55 \\ 0 & 55 & 54 \\ 0 & 54 & 55 \\ 0 & 55 & 54 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 55 & 54 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 55 & 54 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 54 & 55 \\ 0 & 55 & 56 \\ 0 & 55 & 56 \\ 0 & 55 & 56 \\ 0 & 55 & 56 \\ 0 & 55 & 56 \\ 0 & 55 & 56 \\ 0 & 55 & 56 \\ 0 & 56 & 56 \\ $	$\begin{array}{c} 0 & 31 & 196 \\ \overline{b} & \overline{b} & \overline{b} & \overline{b} \\ 0 & 35 \\ 35 \\ 46 \\ \overline{b} & \overline{b} & \overline{b} \\ 0 & 37 \\ 27 \\ \overline{b} & \overline{b} \\ 0 & \overline{b} \\ 0 & \overline{b} & \overline{b} \\ 0 & \overline{b} & \overline{b} \\ 0 & \overline{b} \\ 0 & \overline{b} \\ 0 & \overline{b} \\ 0 & \overline{b} & \overline{b} \\ 0 & \overline{b} \\ 0 & \overline{b} & \overline{b} \\ 0$	$\begin{array}{c} 0.307431 \\ 0.3207431 \\ 0.3207431 \\ 0.3207431 \\ 0.3392581 \\ 0.433771 \\ 0.000 \\ 0.433771 \\ 0.000 \\ 0.433771 \\ 0.000 \\ 0.4439471 \\ 0.000 \\ 0.4439471 \\ 0.000 \\ 0.4439471 \\ 0.000 \\ 0.4439471 \\ 0.000 \\ 0.4439471 \\ 0.000 \\ 0.55812581 \\ 0.000 \\ 0.59312581 \\ 0.000 \\ 0.59315581 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.000 \\ 0.593571 \\ 0.511251 \\ 0.11771 \\ 0.11771 \\ 0.11771 \\ 0.11671 \\ 0.11771 \\ 0.11671 \\ 0.11771 \\ 0.11671 \\ 0.11771 \\ 0.11671 \\ 0.11771 \\ 0.11671 \\ 0.11771 \\ 0.11671 \\ 0.11771 \\ 0.$

Table VII. (cont)

555554444444444533333333322222222222222		$\begin{array}{c} 0 0 0 , 9 , 7 , 3 , 4 \pm 4 0 \\ 0 0 0 , 9 , 4 , 9 , 3 , 5 , 4 \pm 4 0 \\ 0 0 0 0 , 9 , 4 , 9 , 3 , 5 , 4 \pm 4 0 \\ 0 0 0 0 0 , 9 , 3 , 5 , 3 , 4 \pm 4 0 \\ 0 0 0 0 , 9 , 3 , 5 , 3 , 4 \pm 4 0 \\ 0 0 0 0 , 8 , 1 , 3 , 7 \pm 4 + 0 \\ 0 0 0 0 , 8 , 1 , 3 , 7 \pm 4 + 0 \\ 0 0 0 0 , 8 , 1 , 3 , 7 \pm 4 + 0 \\ 0 0 0 0 , 8 , 1 , 3 , 7 \pm 4 + 0 \\ 0 0 0 0 , 4 , 6 , 5 + 1 + 0 \\ 0 0 0 0 , 7 , 4 , 1 \pm 4 + 0 \\ 0 0 0 0 , 7 , 4 , 1 \pm 4 + 0 \\ 0 0 0 0 , 7 , 4 , 1 \pm 4 + 0 \\ 0 0 0 0 , 4 , 6 , 1 + 1 + 0 \\ 0 0 0 0 , 6 , 7 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 7 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 7 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 7 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 7 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 7 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 0 , 6 + 1 + 1 + 0 \\ 0 0 0 0 , 6 + 1 + 0 \\ 0 0 0 0 , 6 + 1 + 0 \\ 0 0 0 0 , 6 + 1 + 0 \\ 0 0 0 0 , 6 + 1 + 0 \\ 0 0 0 0 , 6 + 1 + 0 \\ 0 0 0 0 , 6 + 1 + 0 \\ 0 0 0 , 2 + 1 + 0 \\ 0 + 0 & 0 & 0 \\ 0 0 0 , 0 + 1 + 0 \\ 0 + 0 & 0 & 0 \\ 0 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 0 + 0 & 0 & 0 \\ 0 + 0 & 0 & 0 \\ 0 + 0 & 0 & 0 \\$	$\begin{array}{c} 0, -971 3 4 \\ 1, -000 \\ 0, -971 3 4 \\ 1, -000 \\ 0, -971 3 4 \\ 1, -000 \\ 0, -971 3 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000 \\ 0, -971 4 \\ 1, -000$	$\begin{array}{c} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 $	$\begin{array}{c} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 $	$\begin{array}{c} 0 & 1 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 9 & 9 & 9 & 1 & 2 & 0 & 0 \\ 0 & 9 & 9 & 9 & 1 & 2 & 0 & 0 \\ 0 & 9 & 9 & 9 & 1 & 2 & 0 & 0 \\ 0 & 9 & 9 & 9 & 1 & 2 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 2 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 5 & 0 & 0 \\ 0 & 0 & 1 & 1 & 9 & 0 & 0 \\ 0 & 0 & 1 & 1 & 9 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{c} 0.110048E+001\\ 0.110048E+011\\ 0.110008E+011\\ 0.110008E+011\\ 0.110008E+011\\ 0.110008E+011\\ 0.110008E+010\\ 0.110008E+010\\ 0.110008E+000\\ 0.11008E+000\\ $	$\begin{array}{c} 1 & 0 & 1 & 3 & 4 & 4 & 0 \\ 1 & 1 & 0 & 0 & 2 & 3 & 4 & 0 \\ 1 & 1 & 0 & 0 & 2 & 3 & 4 & 0 \\ 1 & 1 & 0 & 0 & 2 & 4 & 0 & 1 \\ 1 & 0 & 0 & 2 & 4 & 0 & 0 \\ 1 & 0 & 0 & 2 & 4 & 0 & 0 \\ 1 & 0 & 0 & 2 & 4 & 0 & 0 \\ 1 & 9 & 9 & 9 & 2 & 6 & 4 & 0 & 0 \\ 1 & 9 & 9 & 9 & 2 & 6 & 4 & 0 & 0 \\ 1 & 9 & 9 & 9 & 2 & 6 & 4 & 0 & 0 \\ 1 & 9 & 9 & 9 & 2 & 6 & 4 & 0 & 0 \\ 1 & 9 & 9 & 9 & 2 & 6 & 4 & 0 & 0 \\ 1 & 9 & 9 & 0 & 2 & 4 & 0 & 0 \\ 1 & 9 & 9 & 0 & 2 & 4 & 0 & 0 \\ 1 & 9 & 0 & 4 & 2 & 1 & 0 & 0 \\ 1 & 9 & 0 & 4 & 2 & 1 & 0 & 0 \\ 1 & 9 & 0 & 4 & 2 & 1 & 0 & 0 \\ 1 & 9 & 0 & 4 & 2 & 1 & 0 & 0 \\ 1 & 9 & 0 & 6 & 2 & 6 & 1 & 0 & 0 \\ 0 & 1 & 0 & 6 & 2 & 6 & 1 & 0 & 0 \\ 0 & 1 & 6 & 1 & 0 & 0 & 0 & 0 & 6 & 7 & 6 & 1 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 6 & 1 & 6 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 & 5 & 0 & 3 \\ 0 & 1 & 1 & 0 & 0 & 0 & 5 & 0 & 3 \\ 0 & 1 & 1 & 0 & 0 & 0 & 5 & 0 & 3 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 & 5 & 0 & 3 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 & 0 & 5 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 & 0 & 5 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 & 0 & 5 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 & 0 & 5 & 0 & 0 \\ 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 &$	$\begin{array}{c} 1 & 0 & 3 & 7 & 2 & 0 \\ 1 & 0 & 1 & 5 & 1 \\ 1 & 0 & 0 & 7 & 9 & 1 \\ 1 & 0 & 0 & 7 & 9 & 1 \\ 1 & 0 & 0 & 0 & 7 & 9 & 1 \\ 1 & 0 & 0 & 0 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 7 & 8 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 &$
	W-VL ****								
LZ= Z=	L.000000E+000.0000000	+000.000000E+00	0.000000000000	0.000000E+00	0.000000E+00	00.000000E+00	8 0.000000E+00	9.000000E+00	10 0.000000E+20
120 119 118 117 116 116 116 116 116 116 116 109 106 105	$\begin{array}{c} 0.00000 \overline{5} * 00 \\ 0.31544 \\ 0.00000 \overline{5} * 00 \\ 0.30558 \\ 0.00000 \overline{5} * 00 \\ 0.30558 \\ 0.0000 \overline{5} * 00 \\ 0.3058 \\ 0.0000 \overline{5} * 00 \\ 0.27700 \\ 0.0000 \overline{5} * 00 \\ 0.27858 \\ 0.0000 \overline{5} * 00 \\ 0.28138 \\ 0.0000 \overline{5} * 00 \\ 0.28138 \\ 0.0000 \overline{5} * 00 \\ 0.2764 \\ 0.0000 \overline{5} * 00 \\ 0.22693 \\ 0.0000 \overline{5} * 00 \\ 0.26578 \\ 0.0000 \overline{5} * 00 \\ 0.26578 \\ 0.0000 \overline{5} * 00 \\ 0.26578 \\ 0.0000 \overline{5} * 00 \\ 0.2578 \\ 0.000 0 \\ 0.2578 \\ 0.000 0 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.2578 \\ 0.000 \\ 0.000 \\ 0.2578 \\ 0.000 \\ $	$\begin{array}{c} -01 & 0.4 & 1029E-01 \\ -01 & 0.79752E-01 \\ -01 & 0.79456E-01 \\ -01 & 0.7741E-01 \\ -01 & 0.75609E-01 \\ -01 & 0.75608E-01 \\ -01 & 0.74082E-01 \\ -01 & 0.74082E-01 \\ -01 & 0.74082E-01 \\ -01 & 0.714322E-01 \\ -01 & 0.71432E-01 \\ -01 & 0.71121E-01 \\ -01 & 0.7121E-01 \\ -01 & 0.7121E-01 \\ -01 & 0.7127E-0 \\ -01 & 0.7127$	$\begin{array}{c} 0 & 15499E + 00\\ 0 & 15527E + 00\\ 0 & 15527E + 00\\ 0 & 14519E + 00\\ 0 & 14819E + 00\\ 0 & 14819E + 00\\ 0 & 14312E + 00\\ 0 & 1375E + 00\\ 0 & 1375E + 00\\ 0 & 13414E + 00\\ 0 & 14414E + 0\\ 0$	$\begin{array}{c} 0.26095 \pm +00\\ 0.25698 \pm +00\\ 0.25285 \pm +00\\ 0.24630 \pm +00\\ 0.24630 \pm +00\\ 0.24216 \pm +00\\ 0.24216 \pm +00\\ 0.24216 \pm +00\\ 0.23173 \pm +00\\ 0.23104 \pm +00\\ 0.23104 \pm +00\\ 0.23104 \pm +00\\ 0.23104 \pm +00\\ 0.23245 \pm \pm +00\\ 0.232545 \pm +00\\ 0.235555 \pm +00\\ 0.235555 \pm +00\\ 0.2355555 \pm +00\\ 0.23555555 \pm +00\\ 0.23555555555555555555555555555555555555$	$\begin{array}{c} 0.40312 \pm 0 \\ 0.39736 \pm +0 \\ 0.39713 \pm +0 \\ 0.38591 \pm +0 \\ 0.38059 \pm \pm +0 \\ 0.38059 \pm +0 \\ 0.37411 \pm +0 \\ 0.371122 \pm +0 \\ 0.3635 \pm \pm +0 \\ 0.36635 \pm +0 \\ 0.35539 \pm +0 \\ 0.35539 \pm +0 \\ 0.35509 \pm +0 \\ 0.35599 \pm +0 \\ 0.3559 \pm +0 \\ 0.3599 \pm +0 \\ 0.359 \pm +0$	0 0 0.5/15HE+00 0 0.555594E+00 0 0.555594E+00 0 0.554032E+00 0 0.554032E+00 0 0.552579E+00 0 0.551820E+00 0 0.51152E+00 0 0.451152E+00 0 0.448671E+00	$\begin{array}{c} 0 & 0 & -7.3197 \\ 0 & -7.2370 \\ 0 & -7.2370 \\ 0 & -7.1379 \\ 0 & -$	0 + H 5 14 5 E + 00 0 + H 4 3 1 F E + 00 0 + B 4 2 7 4 E + 00 0 + B 3 2 7 4 E + 00 0 + 7 4 3 2 E + 00 0 - 7 8 1 4 6 E + 00 0 - 7 6 H 3 0 E + 00 0 - 7 6 H 3 0 E + 00 0 - 7 4 2 1 3 E + 00 0 - 7 4 9 4 0 E + 00 0 - 7 1 6 0 2 E + 00 0 - 7 0 7 3 E + 00	0 • 92 000E • 00 0 • 91 366E • 00 0 • 90 50 2E • 00 0 • 89 476E • C 0 0 • 86 19 • E • C 0 0 • 86 39 0F • 00 0 • 84 91 • E • C C 0 • 81 38 3E • C 0 0 • 81 38 5E • C 0 0 • 7 39 57 C • 0 0 0 • 77 39 5E • 0 C 0 • 77 39 5E • 0 C

Table VII. (cont)

.

24322209 1987 1154 110 987 654 321 12	$\begin{array}{c} 0.00000 {\scriptstyle E} * 00 0.3501 {\scriptstyle R} {\scriptstyle E} - 01 0.91167 {\scriptstyle E} - 01 0.17 \\ 0.00000 {\scriptstyle E} * 00 0.3627 {\scriptstyle R} {\scriptstyle E} - 01 0.94399 {\scriptstyle E} - 01 0.17 \\ 0.00000 {\scriptstyle E} * 00 0.3627 {\scriptstyle R} {\scriptstyle E} - 01 0.94392 {\scriptstyle E} - 01 0.17 \\ 0.00000 {\scriptstyle E} * 00 0.37637 {\scriptstyle E} - 01 0.94392 {\scriptstyle E} - 01 0.17 \\ 0.00000 {\scriptstyle E} * 00 0.37637 {\scriptstyle E} - 01 0.1065 {\scriptstyle E} * 00 0.29 \\ 0.00000 {\scriptstyle E} * 00 0.37023 {\scriptstyle E} - 01 0.1065 {\scriptstyle E} * 00 0.20 \\ 0.00000 {\scriptstyle E} * 00 0.416347 {\scriptstyle E} - 01 0.75794 {\scriptstyle E} - 01 0.10 \\ 0.00000 {\scriptstyle E} * 00 0.416347 {\scriptstyle E} - 01 0.95794 {\scriptstyle E} - 01 0.10 \\ 0.00000 {\scriptstyle E} * 00 0.41637 {\scriptstyle E} - 02 0.3667 {\scriptstyle E} - 01 0.32 \\ 0.00000 {\scriptstyle E} * 00 0.4252 {\scriptstyle E} - 01 0.6553 {\scriptstyle E} - 00 0.29 \\ 0.00000 {\scriptstyle E} * 00 0.42637 {\scriptstyle E} - 01 0.48534 {\scriptstyle E} - 01 0.32 \\ 0.00000 {\scriptstyle E} * 00 0.42637 {\scriptstyle E} - 01 0.11055 {\scriptstyle E} * 00 0.20 \\ 0.00000 {\scriptstyle E} * 00 0.42637 {\scriptstyle E} - 01 0.11055 {\scriptstyle E} * 00 0.20 \\ 0.00000 {\scriptstyle E} * 00 0.38637 {\scriptstyle E} - 01 0.1025 {\scriptstyle E} + 00 0.20 \\ 0.00000 {\scriptstyle E} * 00 0.37853 {\scriptstyle E} - 01 0.1025 {\scriptstyle E} + 00 0.20 \\ 0.00000 {\scriptstyle E} * 00 0.37853 {\scriptstyle E} - 01 0.1025 {\scriptstyle E} + 00 0.20 \\ 0.0000 {\scriptstyle E} * 00 0.37853 {\scriptstyle E} - 01 0.32 {\scriptstyle C} - 01 0.65 \\ 0.0000 {\scriptstyle C} * 00 0.37853 {\scriptstyle E} - 01 0.1025 {\scriptstyle E} + 00 0.21 \\ 0.0000 {\scriptstyle C} * 00 0.37853 {\scriptstyle E} - 01 0.8793 {\scriptstyle S} {\scriptstyle E} - 01 0.12 \\ 0.0000 {\scriptstyle C} * 00 0.337577 {\scriptstyle E} - 01 0.8793 {\scriptstyle S} {\scriptstyle E} - 01 0.12 \\ 0.0000 {\scriptstyle C} * 00 0.33711 {\scriptstyle E} - 01 0.8737 {\scriptstyle R} {\scriptstyle E} - 01 0.12 \\ 0.0000 {\scriptstyle C} * 00 0.33711 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.16 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.16 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.16 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.33257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 01 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.03257 {\scriptstyle E} - 01 0.8736 {\scriptstyle E} - 00 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.03257 {\scriptstyle E} - 01 0.8736 {\scriptstyle C} - 00 \\ 0.15 \\ 0.0000 {\scriptstyle C} * 00 0.03257 {\scriptstyle C} - 01 0.8736 {\scriptstyle C} - 000 \\$	$\begin{array}{c} 256E+00 & 0.19862E+00\\ 6691E+00 & 0.33560E+00\\ 668E+00 & 0.335919E+00\\ 7792E+00 & 0.31844E+00\\ 7792E+00 & 0.31875E+00\\ 778E+00 & 0.3175E+00\\ 778E+00 & 0.3275E+00\\ 778E+00 & 0.29547E+00\\ 141E+00 & 0.28691E+00\\ 779E+00 & 0.28691E+00\\ 239E+00 & 0.27680E+00\\ 239E+00 & 0.27282E+00\\ 928E+00 & 0.27282E+00\\ 928E+00 & 0.27282E+00\\ \end{array}$	0 -28860 +00 0 -37/79E +00 0 -48830 +00 0 -64012E +00 0 -50173 +00 0 -64012E +00 0 -771E +00 0 -6455RE +00 0 -4701RE +00 0 -6455RE +00 0 -47037E +00 0 -6586E +00 0 -47037E +00 0 -67814E +00 0 -431312 +00 0 -67814E +00 0 -431312 +00 0 -591131E +00 0 -41970E +00 0 -591131E +00	0.43814.00 0.76660.00 0.78704.00 0.78725.00 0.78704.00 0.78725.00 0.78725.00 0.78725.00 0.78725.00 0.78725.00 0.78674.00 0.78725.00 0.78725.00 0.78674.00 0.78725.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78725.00 0.78674.00 0.78674.00 0.78725.00 0.78674.00 0.78674.00 0.78725.00 0.78674.00 0.78674.00 0.78725.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.78674.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00 0.7874.00
LZ == 2998711154111111111111111111111111111111111	0.950335+00 0.95777E+00 0.95966E+00 0.96	$ \begin{array}{c} 0.38E + 0.0 & 0.96093E + 0.0 \\ 0.9509E + 0.0 & 0.95699E + 0.0 \\ 0.5630E + 0.0 & 0.95637E + 0.0 \\ 0.5630E + 0.0 & 0.9563E + 0.0 \\ 0.522E + 0.0 & 0.9563E + 0.0 \\ 0.522E + 0.0 & 0.94786E + 0.0 \\ 0.522E + 0.0 & 0.94786E + 0.0 \\ 0.532E + 0.0 & 0.94016E + 0.0 \\ 0.532E + 0.0 & 0.89166E + 0.0 \\ 0.532E + 0.0 & 0.89166E + 0.0 \\ 0.532E + 0.0 & 0.89166E + 0.0 \\ 0.6532E + 0.0 & 0.89166E + 0.0 \\ 0.6532E + 0.0 & 0.89166E + 0.0 \\ 0.6532E + 0.0 & 0.89166E + 0.0 \\ 0.803E + 0.0 & 0.891252E + 0.0 \\ 0.8032E + 0.0 & 0.81252E + 0.0 \\ 0.8132E + 0.0 & 0.7128E + 0.0 \\ 0.503E + 0.0 & 0.7128E + 0.0 \\ 0.533E + 0.0 & 0.74476E + 0.0 \\ 0.251E + 0.0 & 0.74208E + 0.0 \\ 0.251E + 0.0 & 0.74208E + 0.0 \\ 0.5336E + 0.0 & 0.68145E + 0.0 \\ 0.5336E + 0.0 & 0.45633E + 0.0 \\ 0.5356E + 0.0 & 0.45633E + 0.0 \\ 0.5356E + 0.0 & 0.45633E + 0.0 \\ 0.5356E + 0.0 & 0.45633E + 0.0 \\ 0.5336E + 0.0 & 0.45633E + 0.0 \\ 0.5356E + 0.0 & 0.45633E + 0.0 \\ 0.5336E + 0.0 & 0.45633E + 0.0 \\ 0.5356E + 0.0 &$	$\begin{array}{c} 0 & -96163E + 00 & 0 & -96264E + 00 \\ 0 & -95738E + 00 & 0 & -95817E + 00 \\ 0 & -95738E + 00 & 0 & -95817E + 00 \\ 0 & -9519E + 00 & 0 & -95818E + 00 \\ 0 & -95198E + 00 & 0 & -95818E + 00 \\ 0 & -95198E + 00 & 0 & -96278E + 00 \\ 0 & -95198E + 00 & 0 & -96278E + 00 \\ 0 & -95739E + 00 & 0 & -96278E + 00 \\ 0 & -94233E + 00 & 0 & -94845E + 00 \\ 0 & -93235E + 00 & 0 & -93986E + 00 \\ 0 & -93235E + 00 & 0 & -93986E + 00 \\ 0 & -93235E + 00 & 0 & -93986E + 00 \\ 0 & -93235E + 00 & 0 & -93285E + 00 \\ 0 & -93235E + 00 & 0 & -92952E + 00 \\ 0 & -93235E + 00 & 0 & -92952E + 00 \\ 0 & -93235E + 00 & 0 & -92952E + 00 \\ 0 & -937857E + 00 & 0 & -92952E + 00 \\ 0 & -937857E + 00 & 0 & -92852E + 00 \\ 0 & -937857E + 00 & 0 & -93876E + 00 \\ 0 & -863978E + 00 & 0 & -86916E + 00 \\ 0 & -863978E + 00 & 0 & -86916E + 00 \\ 0 & -863978E + 00 & 0 & -86916E + 00 \\ 0 & -87858E + 00 & 0 & -7856E + 00 \\ 0 & -7858E + 00 & 0 & -7856E + 00 \\ 0 & -7858E + 00 & 0 & -7855E + 00 \\ 0 & -7858E + 00 & 0 & -7855E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -785976E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78558E + 00 \\ 0 & -78595E + 00 & 0 & -78595E + 00 \\ 0 & -78595E + 00 & 0 & -78595E + 00 \\ 0 & -785976E + 00 & 0 & -78595E + 00 \\ 0 & -785976E + 00 & 0 & -78595E + 00 \\ 0 & -785976E + 00 & 0 & -78595E + 00 \\ 0 & -785976E + 00 & 0 & -78595E + 00 \\ 0 & -785976E + 00 & 0 & -73595E + 00 \\ 0 & -785976E + 00 & 0 & -35976E + 00 \\ 0 & -785976E + 00 & $	$\begin{array}{c} 0.96426E+00 0.96623E+00 0.96610E+C0 \\ 0.96203E+00 0.96434E+00 0.96543E+00 \\ 0.955957E+00 0.955964E+00 0.96545E+00 \\ 0.955957E+00 0.955746E+00 0.96547E+00 \\ 0.955469E+00 0.95716E+00 0.95576E+00 \\ 0.9525469E+00 0.95176E+00 0.95576E+00 \\ 0.95457E+00 0.95176E+00 0.95576E+00 \\ 0.94717E+00 0.94915E+00 0.95576E+00 \\ 0.94717E+00 0.93972E+00 0.95576E+00 \\ 0.94319E+00 0.93517E+00 0.93517E+00 \\ 0.93729E+00 0.93517E+00 0.93517E+00 \\ 0.93729E+00 0.93517E+00 0.93517E+00 \\ 0.93729E+00 0.93517E+00 0.93517E+00 \\ 0.93272E+00 0.93517E+00 0.93318E+00 \\ 0.92666E+00 0.93517E+00 0.92357E+00 \\ 0.92666E+00 0.93517E+00 0.92357E+00 \\ 0.92266E+00 0.93728E+00 0.92357E+00 \\ 0.92266E+00 0.93717E+00 0.92255E+00 \\ 0.92266E+00 0.96724E+00 0.92357E+00 \\ 0.90152E+00 0.85535E+00 0.89131E+00 \\ 0.86570E+00 0.86593E+00 0.89131E+00 \\ 0.86570E+00 0.86593E+00 0.881262E+0C \\ 0.86570E+00 0.86521E+00 0.83512E+00 \\ 0.86570E+00 0.86521E+00 0.83512E+00 \\ 0.86570E+00 0.86521E+00 0.86525E+00 \\ 0.86570E+00 0.86521E+00 0.875757E+00 \\ 0.86570E+00 0.86520E+00 0.87573E+00 \\ 0.86570E+00 0.86520E+00 0.87573E+00 \\ 0.86570E+00 0.86520E+00 0.87573E+00 \\ 0.875825E+00 0.86520E+00 0.777375E+00 \\ 0.875825E+00 0.86520E+00 0.777375E+00 \\ 0.77576E+00 0.77146E+00 0.77576E+0 \\ 0.77576E+00 0.771478+00 0.87573E+00 \\ 0.77576E+00 0.771475E+00 0.87573E+00 \\ 0.77576E+00 0.771475E+00 0.87573E+00 \\ 0.77576E+00 0.771475E+00 0.87573E+00 \\ 0.77576E+00 0.771475E+00 0.77576E+0 \\ 0.733200+0 0.23435E+00 0.75976E+0 \\ 0.733200+0 0.23435E+00 0.75976E+0 \\ 0.733200+0 0.22304E+00 0.559338E+0 \\ 0.733200+0 0.22304E+00 0.523145E+00 \\ 0.75732E+00 0.86572E+00 \\ 0.75752E+00 0.86572E+00 \\ 0.75752E+00 0.77134E+00 \\ 0.75752E+00 0.77146E+00 \\ 0.75752E+00 0.77134E+00 \\ 0.674337E+00 0.86740E+00 \\ 0.75938E+00 \\ 0.7593$

0.0000005+000.000000E+000.00000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.00000E+000.00000E+000.00000E+000.00000E 0.969635+00 0.96869E+00 0.96375E+00 0.95698E+00 0.95310E+00 0.95095E+00 0.94578E+00 0.94004E+00 0.93396E+00 0.95194E+00 0.96978E+00 0.9678E+00 0.94170E+00 0.94170E+00 0.93396E+00 0.95194E+00 0.96978E+00 0.9702E+00 0.95310E+00 0.95320E+00 0.95202E+00 0.95202E+00 0.95202E+00 0.95202E+00 0.95202E+00 0.95202E+00 0.95330E+00 0.95310E+00 0.9530E+00 0.9530E+00 0.9500E+00 0.9500E+00 0.95602E+00 0.95802E+00 0.95330E+00 0.95330E+00

Table VII. (cont)

Table VII. (cont)

----S

Table VII. (cont)

32 0.8657RE+00 0.8557IE+00 0.84267E+00 0.8250RE+00 0.8005IE+00 0.766165+00 0.7701XE+00 0.66387E+00 0.66405E+00 0.55919E+00 331 0.77351E+00 0.86557E+00 0.86557E+00 0.84155E+00 0.82108E+00 0.81338E+00 0.7701XE+00 0.66387E+00 0.66405E+00 0.653198E+00 0.7721XE+00 0.86577E+00 0.86557E+00 0.84155E+00 0.84158E+00 0.81338E+00 0.7701XE+00 0.7703XE+00 0.66405E+00 0.65200E+00 0.85544E+00 0.86857E+00 0.86570E+00 0.86557E+00 0.84155E+00 0.85340E+00 0.81338E+00 0.77772E+00 0.7703XE+00 0.7703XE+00 0.7607E+00 0.7701XE+00 0.86857E+00 0.86570E+00 0.86557E+00 0.85340E+00 0.81338E+00 0.7721XE+00 0.7703XE+00 0.7712457E+00 0.7607E+00 0.79705E+00 0.86857E+00 0.86857E+00 0.86570E+00 0.87534E+00 0.85534E+00 0.87507E+00 0.7703XE+00 0.77207E+00 0.77077E+00 0.772755E+00 0.77277E+00 0.86574E+00 0.77277E+00 0.7737E+00 0.7737E+00 0.7737 ++++ DENS 116 115 114 113 112 111
 110
 109106

98765432109876543210987654321098765432109876543210987654321098765432109876543210987	$\begin{array}{c} 0. & (6 2 3 5 6 \cdot 01) & (0. + 15 6 4 1 5 \cdot 01) \\ 0. & (6 4 7 3 0 E \cdot 01) & (0. + 15 6 3 5 5 \cdot 01) \\ 0. & (6 7 3 0 E \cdot 01) & (0. + 15 6 3 5 E \cdot 01) \\ 0. & (7 2 6 5 E \cdot 01) & (0. + 16 6 5 2 E \cdot 01) \\ 0. & (7 2 6 5 E \cdot 01) & (0. + 16 6 7 4 8 E \cdot 01) \\ 0. & (7 2 6 5 E \cdot 01) & (0. + 16 6 7 4 8 E \cdot 01) \\ 0. & (7 2 6 5 E \cdot 01) & (0. + 16 7 4 8 E \cdot 01) \\ 0. & (7 2 6 5 E \cdot 01) & (0. + 17 4 7 8 E \cdot 01) \\ 0. & (7 8 4 7 E \cdot 01) & (0. + 17 4 7 8 E \cdot 01) \\ 0. & (8 15 0 E \cdot 01) & (0. + 17 4 7 8 E \cdot 01) \\ 0. & (8 3 6 6 E \cdot 01) & (0. + 17 4 7 8 E \cdot 01) \\ 0. & (8 6 5 0 E \cdot 01) & (0. + 17 4 7 8 E \cdot 01) \\ 0. & (8 6 5 0 E \cdot 01) & (0. + 17 4 6 E \cdot 01) \\ 0. & (8 6 5 0 E \cdot 01) & (0. + 17 4 6 E \cdot 01) \\ 0. & (8 7 5 9 E \cdot 01) & (0. + 18 7 3 9 E \cdot 01) \\ 0. & (8 7 5 9 E \cdot 01) & (0. + 18 7 3 9 E \cdot 01) \\ 0. & (8 7 5 9 E \cdot 01) & (0. + 18 7 3 9 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 18 7 3 9 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 18 7 3 9 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 18 7 3 9 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 19 7 3 3 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 19 7 3 3 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 19 7 3 3 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 19 7 3 3 E \cdot 01) \\ 0. & (19 3 7 10 E \cdot 01) & (0. + 19 7 3 3 E \cdot 01) \\ 0. & (19 3 1 1 0 E \cdot 01) & (0. + 19 7 3 1 2 E \cdot 01) \\ 0. & (18 2 3 2 E \cdot 01) & (0. + 18 7 5 2 E \cdot 01) \\ 0. & (18 2 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 6 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 7 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 7 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 18 7 5 2 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 17 7 5 E \cdot 01) \\ 0. & (18 7 3 2 E \cdot 01) & (0. + 117 3 7 E \cdot 01) \\ 0. & (13 2 7 5 E \cdot 01) & (0. + 13 2 7 5 E \cdot 01$	$\begin{array}{c} 0 & 1 & 46 & 192 \pm 01 & 0 & 13724 \\ 0 & 1 & 46 & 192 \pm 01 & 0 & 13724 \\ 0 & 1 & 495 & 72 \pm 01 & 0 & 14936 \\ 0 & 1 & 51 & 51 & 12 \pm 01 & 0 & 14936 \\ 0 & 1 & 51 & 51 & 12 \pm 01 & 0 & 14936 \\ 0 & 1 & 51 & 51 & 21 \pm 01 & 0 & 14936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 14936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 14936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 15936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 15936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 15936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 15936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 15936 \\ 0 & 1 & 56 & 976 \pm 01 & 0 & 15936 \\ 0 & 1 & 705 & 51 & 01 & 0 & 156366 \\ 0 & 1 & 705 & 727 \pm 01 & 0 & 0 & 16365 \\ 0 & 1 & 705 & 727 \pm 01 & 0 & 0 & 163757 \\ 0 & 1 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 17377 \\ 0 & 18584 \pm 01 & 0 & 0 & 167377 \\ 0 & 18584 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 1555 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 1555 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 1555 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 1555 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 15725 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 15725 \pm 01 & 0 & 0 & 167377 \\ 0 & 10 & 15725 \pm 01 & 0 & 0 & 167377 \\ 0 & 17735 \pm 01 & 0 & 0 & 167377 \\ 0 & 17735 \pm 01 & 0 & 0 & 165347 \\ 0 & 17735 \pm 01 & 0 & 0 & 165347 \\ 0 & 17735 \pm 01 & 0 & 0 & 165347 \\ 0 & 1595 \pm 01 & 0 & 0 & 0 & 15772 \\ 0 & 0 & 54877 \pm 01 & 0 & 0 & 135716 \\ 0 & 0 & 13795 \pm 01 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1595 \pm 01 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1595 \pm 01 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 $	$\begin{array}{c} 0 & 1 & 2 & 2 & 3 & 3 & 5 \\ 0 & 1 & 0 & 1 & 2 & 3 & 7 & 5 \\ 0 & 1 & 0 & 1 & 3 & 3 & 7 & 5 \\ 0 & 1 & 0 & 1 & 3 & 3 & 7 & 8 \\ 0 & 1 & 0 & 1 & 3 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 3 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 3 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 4 & 7 & 7 & 2 \\ 0 & 1 & 0 & 1 & 5 & 4 & 1 & 1 \\ 0 & 1 & 0 & 1 & 5 & 4 & 1 & 2 \\ 0 & 1 & 0 & 1 & 5 & 4 & 1 & 2 \\ 0 & 1 & 0 & 1 & 5 & 4 & 1 & 2 \\ 0 & 1 & 0 & 1 & 5 & 4 & 1 & 2 \\ 0 & 1 & 0 & 1 & 5 & 4 & 2 \\ 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 1 & 0 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 1 & 0 & 1 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 1 & 0 & 1 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 1 & 0 & 1 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 0 & 1 & 0 & 1 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 0 & 1 & 0 & 1 & 1 & 5 & 5 & 2 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$	$ \begin{array}{c} 0 & 1 & 2 & 3 & 2 & 4 & 1 \\ 0 & 1 & 2 & 3 & 3 & 1 \\ 0 & 1 & 2 & 7 & 3 & 2 & 4 & 0 \\ 0 & 1 & 2 & 7 & 3 & 2 & 4 & 0 \\ 0 & 1 & 2 & 7 & 3 & 2 & 4 & 0 \\ 0 & 1 & 2 & 7 & 3 & 2 & 4 & 0 \\ 0 & 1 & 2 & 7 & 3 & 2 & 4 & 0 \\ 0 & 1 & 2 & 7 & 3 & 2 & 4 & 0 \\ 0 & 1 & 3 & 0 & 3 & 3 & 4 & 4 & 4 & 0 \\ 1 & 0 & 1 & 3 & 5 & 0 & 1 \\ 1 & 0 & 1 & 3 & 5 & 0 & 1 \\ 1 & 0 & 1 & 3 & 5 & 0 & 1 \\ 1 & 0 & 1 & 3 & 5 & 0 & 1 \\ 1 & 0 & 1 & 3 & 5 & 0 & 0 \\ 1 & 0 & 1 & 3 & 5 & 0 & 0 \\ 1 & 0 & 1 & 3 & 5 & 0 & 0 \\ 1 & 0 & 1 & 3 & 5 & 0 & 0 \\ 1 & 0 & 1 & 3 & 5 & 0 & 0 \\ 1 & 0 & 1 & 4 & 5 & 0 & 0 \\ 1 & 0 & 1 & 4 & 5 & 0 & 0 \\ 1 & 0 & 1 & 4 & 5 & 0 & 0 \\ 1 & 0 & 1 & 4 & 5 & 0 & 0 \\ 1 & 0 & 1 & 4 & 5 & 0 & 0 \\ 1 & 0 & 1 & 5 & 5 & 0 & 0 \\ 1 & 0 & 1 & 5 & 0 & 0 & 0 \\ 1 & 0 & 1 & 5 & 0 & 0 & 0 \\ 1 & 0 & 1 & 5 & 0 & 0 & 0 \\ 1 & 0 & 1 & 4 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 4 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 4 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 4 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 4 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 4 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 1 & 4 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 &$	$\begin{array}{c} 0 & 1 \\ 0 & 1 \\ 0 & 1 \\ 0 & 1 \\ 1 & 1 \\ 0 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 2 & 1 \\ 2 & 1 \\ 0 & 1 \\ 1 & 2 \\ 1 & 1 \\ 0 & 1 \\ 1 & 2 \\ 1 & 1 \\ 0 & 1 \\ 1 & 2 \\ 1 & 1 \\ 1 & 2 \\ 1 & 1 \\ 0 & 1 \\ 1 & 2 \\ 1 & 1 \\$	$\begin{array}{c} \bullet \bullet$	$\begin{array}{c} 0 & 1 & 1 & 2 & 3 & 1 & 1 \\ 2 & 2 & 3 & 1 & 1 & 1 \\ 2 & 3 & 1 & 1 & 1 & 0 & 2 & 1 & 1 \\ 0 & 1 & 1 & 1 & 1 & 2 & 0 & 1 & 0 \\ 0 & 1 & 1 & 1 & 1 & 2 & 0 & 1 & 0 \\ 0 & 1 & 2 & 1 & 2 & 1 & 2 & 0 & 1 & 0 \\ 0 & 1 & 2 & 2 & 3 & 9 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 9 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 9 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 9 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 9 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 0 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 0 & 1 & 0 & 1 \\ 0 & 1 & 2 & 2 & 3 & 0 & 1 & 0 & 0 \\ 0 & 1 & 2 & 2 & 3 & 0 & 1 & 0 & 0 \\ 0 & 1 & 2 & 5 & 2 & 1 & 0 & 1 & 0 \\ 0 & 1 & 2 & 5 & 2 & 1 & 0 & 1 & 0 \\ 0 & 1 & 2 & 5 & 2 & 1 & 0 & 1 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 1 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0$	$\begin{array}{c} 1 & 1 & 1 & 5 & 4 & 3 & 1 \\ 1 & 1 & 1 & 5 & 6 & 8 & 1 \\ 1 & 1 & 1 & 5 & 6 & 8 & 0 & 1 \\ 1 & 1 & 5 & 6 & 8 & 0 & 1 \\ 1 & 1 & 5 & 6 & 8 & 0 & 1 \\ 1 & 1 & 2 & 5 & 8 & 0 & 1 \\ 1 & 2 & 5 & 8 & 0 & 1 \\ 1 & 2 & 5 & 8 & 0 & 1 \\ 1 & 2 & 5 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 1 \\ 1 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 7 & 7 & 5 & 8 & 0 & 0 \\ 1 & 2 & 7 & 7 & 5 & 8 & 0 & 0 \\ 1 & 2 & 7 & 7 & 5 & 8 & 0 & 0 \\ 1 & 2 & 7 & 5 & 8 & 0 & 0 & 0 \\ 1 & 2 & 7 & 5 & 8 & 0 & 0 & 0 \\ 1 & 3 & 7 & 8 & 8 & 0 & 0 & 0 \\ 1 & 5 & 5 & 9 & 8 & 0 & 0 & 0 \\ 1 & 5 & 5 & 9 & 8 & 0 & 0 & 0 \\ 1 & 2 & 5 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 5 & 7 & 8 & 0 & 0 & 0 \\ 1 & 2 & 2 & 2 & 6 & 0 & 1 & 0 & 0 & 1 & 2 & 0 & 1 \\ 0 & 1 & 2 & 2 & 5 & 7 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$
12	0.95203E+00 0.94571E+0 0.10732E+01 0.10648E+0 0.10797E+01 0.10718E+0 0.10880E+01 0.10800E+0 0.11240E+01 0.11144E+0	$\begin{array}{c} 0 & 0.93675E + 00 & 0.9258E\\ 1 & 0.10522E + 01 & 0.1035\\ 1 & 0.1057RE + 01 & 0.1035\\ 1 & 0.1057RE + 01 & 0.10516\\ 1 & 0.1079RE + 01 & 0.1086\\ 1 & 0.1134E + 01 & 0.1085\\ 1 & 0.1134E + 01 & 0.1085\\ 1 & 0.1134E + 01 & 0.1085\\ 1 & 0.1107RE + 01 & 0.1086\\ 1 & 0.107RE + 01 & 0.1086\\ 1 & 0.11274E + 01 & 0.1086\\ 1 & 0.11274E + 01 & 0.1090\\ 1 & 0.11274E + 01 & 0.1090\\ 1 & 0.11274E + 01 & 0.1090\\ \end{array}$	+00 0.91476E+ +01 0.10167F+ +01 0.1024RE+ +01 0.10359E+ +01 0.10559E+ +01 0.10676E+ +01 0.10676E+ +01 0.10678E+ +01 0.1078E+ +01 0.10725E+	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	0 0.90100E+00 0 0.98372E+00 1 0.99519E+00 1 0.119E+01 1 0.10191E+01 1 0.10162E+01 1 0.10173E+01 1 0.10173E+01 1 0.10246E+01 1 0.10246E+01 1 0.10249E+01	$\begin{array}{c} 0.89987 \pm 0.0\\ 0.97435 \pm 0.0\\ 0.977941 \pm 0.0\\ 0.977941 \pm 0.0\\ 0.998376 \pm 0.0\\ 0.99828 \pm 0.0\\ 0.10045 \pm 0.1\\ 0.10013 \pm 0.1\\ 0.10019 \pm 0.1\\ 0.10042 \pm 0.1\\ 0.10049 \pm 0.1\\ 0.10079 \pm 0$	$\begin{array}{c} 0.90069E+0C\\ 0.96901E+00\\ 0.96901E+00\\ 0.97336E+00\\ 0.97704E+00\\ 0.997092E+00\\ 0.999692E+00\\ 0.999024E00\\ 0.99300E+00\\ 0.99300E+00\\ 0.993419E+00\\ 0.993671E+00\\ 0.999671E+00\\ 0.999871E+00\\ 0.999871E+00\\ 0.99881E+00\\ 0.998881E+00\\ 0.9988888888888888888888888888888888888$	$\begin{array}{c} 0.90199 \\ \in \ 0.000 \\ \circ \ 96603 \\ \in \ 0.97012 \\ \in \ 0.97353 \\ \in \ 0.97353 \\ \in \ 0.97353 \\ \in \ 0.98768 \\ \in \ 0.99385 \\ \in \ 0.999385 \\ \in \ 0.999385 \\ \in \ 0.999385 \\ = \ 0.999385 \\ = \ 0.999385 \\ = \ 0.999385 \\ = \ 0.999385 \\ = \ 0.999385 \\ = \ 0.999385 \\ = \ 0.999328 \\ = \ 0.9938 \\ = \ 0.9938 \\ = \ 0.9938 \\ = \ 0.9938 \\ = \ 0.9938 \\ = \ 0.9938 \\ = \ 0.9938 \\ $

Table VII. (cont)

LZ=	.000000E+000.000000E+0	13	14	16	17	18	19	20
Z= (00.000000E+000.000	000E+000.000000E+0	00+000000E+001	0.000000E+00	0.000000E+00	0 • 00 0 0 0 0 E + 0 0 1	• 000000E +00
11111111111111111111111111111111111111	$\begin{array}{c} 0.93565 0.0 0.992845 + 0 \\ 0.993565 0.0 0.994875 + 0 \\ 0.9961705 0.0 0.994875 + 0 \\ 0.9961705 0.0 0.994875 + 0 \\ 0.9971595 0.0 0.994875 + 0 \\ 0.9971595 0.0 0.994875 + 0 \\ 0.9971595 0.0 0.994875 + 0 \\ 0.9971595 0.0 0.993175 + 0 \\ 0.997857 + 0 \\ 0.998275 + 0 \\ 0.993875 + 0 \\ 0.997857 + 0 \\ 0.99787 + 0 \\ 0.9787 + 0 \\ 0.9787 + 0 \\ 0.9787 + 0 \\ 0.9787 + 0 \\ 0.9787 + 0 \\ 0.9787 + 0 \\ 0.9787 + 0 \\ 0.9787 $	$\begin{array}{c} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 $	$\begin{array}{c} 251E + 00 & 0.993, 27E + 0 \\ 346E + 00 & 0.993, 37E + 0 \\ 346E + 00 & 0.993, 37E + 0 \\ 340E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.993, 37E + 0 \\ 350E + 00 & 0.974, 32E + 0 \\ 350E + 00 & 0.974, 32E + 0 \\ 350E + 00 & 0.974, 32E + 0 \\ 350E + 00 & 0.974, 32E + 0 \\ 377E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.964, 325E + 0 \\ 378E + 00 & 0.964, 325E + 0 \\ 378E + 00 & 0.964, 325E + 0 \\ 378E + 00 & 0.964, 325E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 00 & 0.974, 32E + 0 \\ 378E + 01 & 0.102, 00E + 0 \\ 378E + 01 & 0.102, 00E + 0 \\ 378E + 01 & 0.112, 37E + 0 \\ 378E + 01 & 0.112, 37E + 0 \\ 378E + 01 & 0.122, 37E + 0 \\ 378E $	$\begin{array}{c} 0 & 0 & 992 \\ 213 \\ \hline \\ 0 & 0 & 993 \\ 374 \\ \hline \\ 0 & 0 & 993 \\ 374 \\ \hline \\ 0 & 0 & 0 & 993 \\ 374 \\ \hline \\ 0 & 0 & 0 & 993 \\ 374 \\ \hline \\ 0 & 0 & 0 & 993 \\ 374 \\ \hline \\ 0 & 0 & 0 & 993 \\ 374 \\ \hline \\ 0 & 0 & 0 & 993 \\ 773 \\ 10 \\ 0 & 0 & 0 & 993 \\ 773 \\ 10 \\ 10 \\ 0 & 0 & 0 \\ 0 & 0 & 993 \\ 773 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 1$	$\begin{array}{c} 0, 97 187 \xi + 00\\ 0, 97 345 \xi + 00\\ 0, 98 14 \xi + 00\\ 0, 98 14 \xi + 00\\ 0, 97 15 \xi + 00\\ 0, 97 10 \xi + 00\\ 0, 10 0 4 \xi + 00\\ 0, 10 0 4 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 7 2 \xi + 00\\ 0, 11 0 0 0 0 0 0 0 0\\ 0, 11 0 0 0 0 0 0 0\\ 0, 11 0 0 0 0 0 0\\ 0, 11 0 0 0 0 0 0\\ 0, 11 0 0 0 0 0\\ 0, 11 0 0 0 0 0\\ 0, 11 0 0 0 0 0\\ 0, 11 0 0 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0\\ 0, 11 0 0 0\\ 0, 11 0 0\\ 0,$	$\begin{array}{c} 0 & -99 & 13 & 0 & -99 \\ 0 & -99 & 27 & 9 & -00 \\ 0 & -99 & 27 & 9 & -00 \\ 0 & -99 & 28 & 52 & -00 \\ 0 & -99 & 28 & 52 & -00 \\ 0 & -99 & 28 & 52 & -00 \\ 0 & -99 & 28 & 52 & -00 \\ 0 & -98 & 73 & 52 & -00 \\ 0 & -98 & 73 & 52 & -00 \\ 0 & -98 & 73 & 52 & -00 \\ 0 & -98 & 74 & 52 & -00 \\ 0 & -98 & 74 & 52 & -00 \\ 0 & -98 & 74 & 52 & -00 \\ 0 & -98 & 74 & 52 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -96 & 08 & 62 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 148 & 52 & -00 \\ 0 & -93 & 126 & 52 & -00 \\ 0 & -93 & 126 & 52 & -00 \\ 0 & -93 & 126 & 52 & -00 \\ 0 & -93 & 126 & 52 & -00 \\ 0 & -93 & 126 & 52 & -00 \\ 0 & -93 & 126 & 52 & -00 \\ 0 & -93 & 048 & 62 & -00 \\ 0 & -93 & 048 & 62 & -00 \\ 0 & -93 & 048 & 62 & -00 \\ 0 & -93 & 048 & -00 \\ 0 & -11 & 226 & 52 & -00 \\ 0 & -11 & 226 & 52 & -00 \\ 0 & -11 & 226 & 52 & -01 \\ 0 & -11 & 226 & $	$\begin{array}{c} 0 & -9 \\ 0 & -1 \\ 0 & -$	$\begin{array}{c} 0.99250 [+ 00 \\ 0.99255 [+ 00 \\ 0.99255 [+ 00 \\ 0.99255 [+ 00 \\ 0.99255 [+ 00 \\ 0.99255 [+ 00 \\ 0.99255 [+ 00 \\ 0.9984 [+ 00 \\ 0.9988 [+ 00 \\ $

.

3210987654321098765432109876543210987654321	$\begin{array}{c} 0 & 1 & 1 & 3 & 8 & 4 & 5 & 0 & 1 & 0 & . & 1 & 1 & 3 & 7 & 8 & 4 & 0 & 1 & 0 & . & 1 & 1 & 2 & 7 & 4 & 0 & 1 & 0 \\ 0 & 1 & 1 & 1 & 3 & 1 & 5 & 0 & 1 & 0 & 1 & 1 & 2 & 7 & 4 & 0 & 1 & 0 \\ 0 & 1 & 1 & 1 & 3 & 1 & 5 & 0 & 1 & 0 & 0 & 1 & 1 & 0 & 2 & 5 & 0 & 1 \\ 0 & 1 & 1 & 0 & 5 & 5 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 5 & 7 & 5 & 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 5 & 6 & 0 & 1 & 0 & 1 & 0 & 5 & 7 & 5 & 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 3 & 2 & 5 & 0 & 1 & 0 & 0 & 5 & 7 & 5 & 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 3 & 2 & 5 & 0 & 1 & 0 & 0 & 0 & 5 & 7 & 5 & 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 3 & 2 & 5 & 0 & 1 & 0 & 0 & 0 & 5 & 7 & 5 & 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 3 & 2 & 5 & 0 & 1 & 0 & 1 & 0 & 3 & 2 & 2 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 & 5 & 5 & 0 & 1 & 0 & 1 & 0 & 3 & 2 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 & 5 & 5 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 5 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 $	$\begin{array}{c} 0 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 &$	113562 + 01 11357 + 01 11357 + 01 10967 + 01 10967 + 01 10967 + 01 10765 + 01 10652 + 01 10652 + 01 10520	$\begin{array}{c} 0 & 1 & 1 & 3 & 5 & ct = 0 & 1 & 0 \\ 0 & 1 & 1 & 2 & 3 & ct = 0 & 1 & 0 \\ 0 & 1 & 1 & 1 & 0 & 5 & e & 0 & 1 \\ 0 & 1 & 1 & 0 & 3 & t = 0 & 1 & 0 \\ 0 & 1 & 0 & 7 & 1 & t = 0 & 1 & 0 \\ 0 & 1 & 0 & 7 & 0 & 1 & t = 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 0 & t = 0 & 1 & 0 \\ 0 & 1 & 0 & 5 & 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 2 & 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 2 & 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 2 & 0 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0$	$\begin{array}{c} 1 & 1 & 3 & 3 \\ 1 & 1 & 2 & 2 \\ 1 & 1 & 2 & 2 \\ 1 & 0 & 9 & 6 & * & 0 \\ 1 & 0 & 9 & 7 & 4 & 0 \\ 1 & 0 & 9 & 7 & 4 & 0 \\ 1 & 0 & 9 & 7 & 4 & 0 \\ 1 & 0 & 7 & 3 & 6 & 0 \\ 1 & 0 & 7 & 3 & 6 & 0 \\ 1 & 0 & 1 & 0 & 5 & 1 \\ 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 & 2 & 5 & 1 \\ 1 & 0 & 0 & 1 & 2 & 4 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 1 & 0 \\ 1 & 0 & 0 & 2 & 5 & 2 & 0 \\ 1 & 0 & 0 & 0 & 2 & 0 & 2 & 0 \\ 1 & 0 & 0 & 0 & 2 & 0 & 2 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 &$	$\begin{array}{c} 0 & , i \\ 0 & , i \\$	$\begin{array}{c} 1 \\ 1 \\ 1 \\ 2 \\ 2 \\ 2 \\ 2 \\ 2 \\ 2 \\ 2 \\$
L7= 2=	21 C.000000E+000.000000E+000.							
1209876543210987654321098765432109876543210987868 1111541111100876554321099876543210998788 10007654321099876543210998788	$\begin{array}{c} 0.993186 \pm 000 0.993460 \\ 0.99179 \\ 0.000 0.997465 \\ 0.0974997 \\ 0.000 0.9937885 \\ 0.000 0.993725 \\ 0.000 0.993725 \\ 0.000 0.993725 \\ 0.000 0.993755 \\ 0.000 0.98180 \\ 0.000 \\ 0.97015 \\ 0.000 \\ 0.97017 \\ 0.000 \\ 0.97017 \\ 0.000 \\ 0.97017 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97127 \\ 0.000 \\ 0.97295 \\ 0.000 \\ 0.97295 \\ 0.000 \\ 0.97295 \\ 0.000 \\ 0.97295 \\ 0.000 \\ 0.97017 \\ 0.97047 \\ 0.000 \\ 0.93074 \\ 0.000 \\ 0.93051 \\ 0.900 \\ 0.92031 \\ 0.900 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.92121 \\ 0.000 \\ 0.93131 \\ 0.91318 \\ 0.000 \\ 0.93131 \\ 0.900 \\ 0.93131 \\ 0.900 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.93131 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.000 \\ 0.9313 \\ 0.000 \\ 0.000 \\ 0.9313 \\ 0.000 \\$	$\begin{array}{c} 0.& 0.0206 \pm 0.1 & 0.10015\pm \times 0.1 \\ 0.00205 \pm 0.1 & 0.100205 \pm 0.1 \\ 0.10025 \pm 0.1 & 0.100205 \pm 0.1 \\ 0.10035 \pm 0.1 & 0.10035 \pm 0.1 \\ 0.10035 \pm 0.1 & 0.10035 \pm 0.1 \\ 0.10036 \pm 0.1 & 0.10057 \pm 0.1 \\ 0.10026 \pm 0.1 & 0.10068 \pm 0.1 \\ 0.10078 \pm 0.1 & 0.10078 \pm 0.1 \\ 0.10078 \pm 0.1 & 0.10084 \pm 0.1 \\ 0.9973 \pm 0.0 & 0.10084 \pm 0.1 \\ 0.9973 \pm 0.0 & 0.10078 \pm 0.1 \\ 0.9973 \pm 0.0 & 0.99623 \pm 0.0 \\ 0.763 \pm 0.0 & 0.9645 \pm 0.0 \\ 0.754 \pm 0.0 & 0.9645 \pm 0.0 \\ 0.754 \pm 0.0 & 0.9645 \pm 0.0 \\ 0.7353 \pm 0.0 & 0.9565 \pm 0.0 \\ 0.353 \pm 0.0 & 0.9555 \pm 0.0 \\ 0.3553 \pm 0.0 & 0.9555 \pm 0.0 \\ 0.3553 \pm 0.0 & 0.9555 \pm 0.0 \\ 0.3553 \pm 0.0 & 0.955 \pm 0.0 \\ 0.3553 \pm 0.0 & 0.955 \pm 0.0 \\ 0.3553 \pm 0.0 & 0.955 \pm 0.0 \\ 0.355 \pm 0.0 & 0.975 + 0.0 \\ 0.95 \pm 0.0 & 0.955 \pm 0.0 \\ 0.95 \pm 0.0 & 0.95 \pm 0.0 \\ 0.95 \pm 0.0 & 0.97 \pm 0.0 \\ 0.95$	$\begin{array}{c} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 $	$\begin{array}{c} 0 & 9 & 9 & 9 & 9 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 9 & 9 & 9 & 9 & 9 & 9 & 9 & 9 & 9 &$	$\begin{array}{c} 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 &$	$\begin{array}{c} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 $	$\begin{array}{c} 0 + 9 + 9 + 9 + 2 + 2 + 2 + 0 + 0 \\ 0 + 9 + 9 + 9 + 2 + 2 + 0 + 0 \\ 0 + 9 + 9 + 2 + 2 + 0 + 0 \\ 0 + 9 + 9 + 2 + 2 + 0 + 0 \\ 0 + 9 + 9 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 2 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 1 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 1 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 1 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 1 + 2 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 1 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 0 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 0 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 0 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 0 + 0 + 0 + 1 \\ 0 + 1 + 0 + 0 + 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0$

Table VII. (cont)

••••	0.999412E*00 0.999470E*00 0.999470E*00 0.99502E*00 0.99540E*00 0.99556*00 0.99556*00 1.9556*00 1.556*00 1.15 AT ISTEP N • ENTH 0.000000E*000	0.998232400 0.998422400 0.998422400 0.998782400 0.998782400 0.999002400 0.999002400 0.999002400	0.199866400 0.10006401 0.100016401 0.100035401 0.100066401 TFIME = 0.3	0.100012:01 0.10002:01 0.10002:01 0.10002:01 0.10004:01 0.10004:01 12376:01	0.999812+00 0.999812+00 0.999762+00 0.999752+00 0.999752+00 0.999802+00	0.999928E+00 0.999914E+00 C.999908E+C0 C.999908E+C0 0.99901E+00	0+97876E+00 0+97836E+00 0+99846E+00 0+99819E+00 0+99809E+00	0 • 99869E • 00 0 • 99809E • 00 0 • 99762E • 00 0 • 99770E • 00 0 • 997700E • 00	0.9974200 0.9974200 0.99846200 0.99841200 0.99841200 0.99823200	0 • 1 0 0 3 3 E • 0 1 0 • 1 0 0 3 3 E • 0 1 0 • 1 0 0 5 5 E • 0 1 0 • 1 0 0 5 5 E • 0 1 0 • 1 0 0 5 4 E • 0 1
7 = 120										
20987654321098765432109876543221098765432109876543210987765666666666665555555	$\begin{array}{c} 0 &$	$\begin{array}{c} 0.833/5 \pm 0.0\\ 0.823/5 \pm 0.0\\ 0.823/5 \pm 0.0\\ 0.823/5 \pm 0.0\\ 0.823/5 \pm 0.0\\ 0.873/5 \pm 0.0\\ 0.816/2 \pm 0.0\\ 0.816/2 \pm 0.0\\ 0.816/2 \pm 0.0\\ 0.826/5 \pm 0.0\\ 0.835/5 \pm 0.0\\ 0.85/5 + 0.0$	$\begin{array}{c} 0.8 & 461 \\ 2.4 \\ 2.4 \\ 0.8 \\ 2.5 \\ 1.6 \\ 2.5 \\ 1.6 \\ 2.5 \\ 1.6 \\ 2.5 \\ 1.6 \\ 2.5 \\ 1.6 \\ 1.5 \\$	$\begin{array}{c} 0 & 86 \\ 0 & 86 \\ 0 & 86 \\ 16 \\ 0 & 86 \\ 16 \\ 26 \\ 16 \\ 16 \\ 16 \\ 16 \\ 16 \\ 1$	$\begin{array}{c} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{c} 0, \ y \ y \ z \ z \ z \ z \ z \ z \ z \ z$	$\begin{array}{c} 0 & 9 & 3 & 1 & 3 & 8 & 1 & 0 \\ 0 & 9 & 3 & 1 & 3 & 8 & 1 & 0 \\ 0 & 9 & 3 & 1 & 4 & 8 & 0 & 0 \\ 0 & 9 & 2 & 6 & 6 & 7 & 0 & 0 \\ 0 & 9 & 2 & 6 & 6 & 7 & 0 & 0 \\ 0 & 9 & 2 & 6 & 6 & 7 & 0 & 0 \\ 0 & 9 & 0 & 5 & 0 & 5 & 7 & 0 & 0 \\ 0 & 9 & 0 & 5 & 0 & 5 & 7 & 0 & 0 \\ 0 & 9 & 0 & 0 & 5 & 0 & 5 & 7 & 0 & 0 \\ 0 & 9 & 0 & 0 & 5 & 0 & 5 & 7 & 0 & 0 \\ 0 & 9 & 0 & 0 & 5 & 0 & 5 & 0 & 0 \\ 0 & 8 & 9 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 9 & 1 & 5 & 1 & 0 & 0 \\ 0 & 8 & 8 & 5 & 1 & 1 & 1 & 1 & 1 & 1 & 0 \\ 0 & 8 & 8 & 5 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 0 \\ 0 & 8 & 8 & 5 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1$	$\begin{array}{c} 0 & 9 & 5 & 7 & 1 \\ 0 & 9 & 5 & 7 & 1 \\ 0 & 9 & 5 & 7 & 1 \\ 0 & 9 & 5 & 7 & 1 \\ 0 & 9 & 5 & 7 & 7 \\ 0 & 9 & 5 & 7 & 7 \\ 0 & 9 & 5 & 7 & 7 \\ 0 & 9 & 5 & 7 & 7 \\ 0 & 9 & 5 & 7 & 7 \\ 0 & 9 & 5 & 7 & 7 \\ 0 & 9 & 5 & 7 & 1 \\ 0 & 9 & 5 & 7 & 1 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 2 & 3 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 9 & 1 & 5 & 7 \\ 0 & 0 & 9 & 9 & 7 \\ 0 & 0 & 9 & 9 & 7 \\ 0 & 0 & 9 & 9 & 7 \\ 0 & 0 & 1 & 7 & 5 \\ 0 & 0 & 1 & 0 & 7 \\ 0 & 1 & 1 & 7 & 5 \\ 0 & 1 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 1 & 7 \\ 0 & 1 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 1 & 7 \\ 0 & 1 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 7 & 7 \\ 0 & 1 & 0 & 1 & 0 & 7 \\ 0 & 1 & 0 & 1 & 0 & 7 \\ 0 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 1 &$	$\begin{array}{c} 0 & - 37 + 96 + 25 + 00 \\ 0 & - 37 + 43 + 52 + 00 \\ 0 & - 37 + 43 + 52 + 00 \\ 0 & - 37 + 43 + 52 + 00 \\ 0 & - 37 + 43 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 32 + 52 + 00 \\ 0 & - 37 + 52 + 52 + 00 \\ 0 & - 37 + 52 + 52 + 00 \\ 0 & - 37 + 52 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 37 + 52 + 00 \\ 0 & - 11 + 53 + 00 \\ 0 & - 11 + 53 + 00 \\ 0 & - 11 + 53 + 00 \\ 0 & - 11 + 53 + 00 \\ 0 & - 11 + 53 + 00 \\ 0 & - 11 + 33$	$\begin{array}{c} 0 & 7 & 3 & 2 & 3 & 5 & 5 & 5 & 1 & 0 \\ 0 & 7 & 9 & 4 & 5 & 1 & 5 & 5 & 5 & 5 & 1 & 0 \\ 0 & 7 & 9 & 4 & 6 & 1 & 5 & 4 & 5 & 6 & 0 \\ 0 & 7 & 9 & 7 & 1 & 7 & 5 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 7 & 9 & 7 & 1 & 7 & 5 & 5 & 5 & 5 & 5 & 5 & 5 & 5 & 5$

103 102

Table VII. (cont)

							0.00(00-000	0 894925400	0 898225400	0.901965+00
98 97 96	0.89663E+00		0.99312E+00	0.89138E+00	P.88986F+00	0.898705+00	0.89149E+00 0.89802E+00 0.88586E+00	0.488121400	0.890021.400	0.894836.400
95 94 93	0.89443E+00 0.89398E+00 0.89428E+00	0.89230E+00 0.89286E+00	0.89076E+00 0.89061E+00 0.99147E+00	0.88905E+00 0.89025E+00	0.88776F+00	0.886875+00	0.88553E+C0 0.88980E+00	0.89718E+00 0.89988E+00	0.88990E+00 C.89313E+C0 0.89965E+00	0.89583E+00 0.89960E+00 0.90630E+00
92 91 90	0+89698E+00 0+90127E+00 0+907425+00	0.90116E+00	0.90108E+00	0.90110E+00	0.90130E+00 0.91066E+00	0.90172E+00 0.911615+00	0.90255E+00 0.91288E+00	0.91501E+00	0.93812E+00 0.91900E+00	0.914845+00 0.925665+00
89 88 87	0.92215E+00 0.934845+00 0.95433E+00		0.92573E+00 0.73915E+00	0.940495+00	0.94160F+00	0.94266F+00	0.93034E+00 0.94391E+00 0.96223E+30	0.94577E+00	0.93554E+00 0.94905E+00 0.5673CE+00	0.94118E+C0 0.95432E+C0 0.97177E+J0
86 85 84	0.98260E+00 0.10036E+01 0.10223E+01	0.10039F+01		0.1004/6+01				0.98823E+00 0.10077E+01 0.10262E+01	0.99012E+00 0.10086E+01 0.10261E+01	0.99236E+00 0.10087E+01 0.10232E+01
83 82 81	0.104305+01	0.10434E+01 0.10645E+01	0.10439E+01 0.10650E+01	0.10443E+01 0.10654E+01	0.10448E+01 0.10656E+01	0.10453E+01 0.10658E+01	0.10456E+01 0.10657E+01 0.10848E+01	0.10459E+01 0.10652E+01	0.10437E+01 0.10594E+01 0.10714E+01	0.10360E+01 0.10448E+01 0.10490E+01
80 79 78	0.11036E+01 0.11203E+01	0.11044E+01	0+11047E+01	0.11046E+01 0.11207E+01	0.11043E+01 0.11199E+01	0.11032E+01 0.11182E+01	0.11026E+01 0.11175E+01	0 • 10979E • 01 0 • 11084E • 01 0 • 11142E • 01	0.10768E+01 0.10813E+01 0.10804E+01	0 • 1 0 4 9 0 F • 0 1 0 • 1 0 4 6 2 E • 0 1 0 • 1 0 4 2 7 E • 0 1
11 76 75	0+11430E+01 0+11509E+01 0+11598E+01	0.11436E+01 0.11514E+01	0.11429E+01 0.11504E+01	0.11423E+01 0.11497E+01 0.11578E+01	0.11400E+01	0.11296E+01 0.11387E+01 0.11465E+01 0.11465E+01 0.11553E+01	0.11420F+01	0.11157E+01 0.11144E+01	0.10760E+01 0.10697E+01 0.10636E+01	0+10375E+01 0+10317E+C1 0-10269E+61
74 73 72	0.116912.01 0.117772.01 0.118725.01	0.11687E+01 0.11768F+01	0.11676E+01	0.11661E+01 0.11738E+01	0.11626E+01 0.11704E+01	0.11643E+01 0.117295+01	0.11521E+01 0.11565E+01	0.11122E+01 0.11099E+01 0.11083E+01 0.11084E+01	0.10583E+01 0.10545E+01	0.10232E.01 0.10208E.01 0.10194E.01
71	0.11970E+01	0.11952E+01 0.12048E+01 0.12118E+01	0.11944E+01	0.11912[+01	0 • 11879E • 01	0.11919E+01 0.12014F+01	0.11693E+01	0.11112E+01 0.11166E+01	0.10526E+01 0.10548E+01	0.10192E+01 0.10199E+01 0.10214E+01
69 68 67	0.12166E+01 0.12181E+01 0.122065+01	0.12150E+01	0.12129E+01 0.12147E+01 0.12177E+01	0.12108E+01 0.12139F+01	0.12042E+01 0.12059E+01	0.121081.01 0.121225.01	0.12024E+01	0.11335E+01 0.11449E+01 0.11592E+01	0.10648E+01 0.10725E+01	0.10237E+01 0.10267E+01
66 65 64	0 • 122 • 6 = • 0 1 0 • 122 • 4 Ē • 0 1 0 • 123 0 6 Ē • 0 1 0 • 123 9 2 Ē • 0 1	0.12278E+01 0.12366E+01	0.12229E+01 0.12315E+01 0.12441E+01	0.12237E+01 0.12315E+01	0.12156E+01 0.12254E+01	0.12161E.01 0.12206E.01	0.12209E+C1 0.12313E+01 0.12417E+01	0.11760E+01 0.11950E+01	0.10965E+01 0.11131E+C1 0.11328E+01	0.10366E+01 0.104425+01
63 62 61	0.124095+01 0.123765+01	0.125216+01	0.12514E+01 0.12559E+01 0.12634E+01	0.124585461	0.12460+401	0.123201+01	0.124401401	0.123121 +01	0.0112381401	0.10664E+01 0.10803E+01
60 59 58	0.11911E+01	0.125198+01	0.126716+01	0.125886+01	0.125851+01	0.125016+01	0.124121+01	0.125666+01	0.122056+01	0+11106E+01 0+11235E+01
57 56 55	0 • 1 1559E • 01 0 • 1 1298E • 01 0 • 1 1242E • 01	0.12156E+01 0.12026E+01	0.12/01E+01 0.12613E+01 0.12413E+01	0.12701E+01 0.12554E+01 0.12554E+01	0.12639E+01 0.12606E+01 0.12458E+01	0.12605E+01	0.12430E+01 0.12409E+01 0.12313E+01	0.12579E+01 0.12518E+01 0.12343E+01 0.12052E+01	0.12358E+01 0.12315E+01 0.12156E+01	0.11508E+01 0.11616E+01 0.11732E+01
54 53 52	0.113955+01 0.11464E+01 0.11482E+01	0.11661E+01 0.11564E+01	0.11747E+01 0.11620E+01	0.11794F+01	0.11803E+01 0.11660E+01	0 • 11 784E • 01 0 • 11634E • 01	0.12122E+01 0.11799E+01 0.11658E+01	0.11706E+01 0.11590E+01	0.11815E.01 0.11628E.01	0.11682F+C1 0.11620E+01
51 50 49	0.11578E.00 0.11625E.01 0.11651E.01	L 0.11701E+01 0.117275+01	0.11754E+01 0.11776E+01	0.11770E+01	0.11789E+01	0.11774E+01	0.11720E+01 0.11769E+01 0.11791E+01 0.11797E+01	0.11736E+01	0.11686E+01	0.11700E+01 0.11723E+01
48 47 46	0.11671E+0 0.116805+0 0.116725+0	L 0.11739E+01	0.11772E+01 0.11743E+01	0.11794E+01 0.11762E+01	0.11800E+01 0.11767E+01	0.11803E*01 0.11770E*01	0.117856.01	0.11776E+01 0.11744E+01	0.117246+01 0.117056+01	0.11704E.+01 0.11670E.+01
45	0.116475+0 0.11608E+0 0.115985+0	1 0.11630E+01	0.11644E+01 0.11622E+01	0.11654E+01 0.11629E+01	0.11658E+01 0.11632E+01	0.11659E + 01 0.11632E + 01	0.11710E+01 0.11652E+01 0.11626E+01	0.11639E+01 0.11615E+01	0.11619E+01 0.11598E+01	0 • 11629E • 01 0 • 11583E • 01 0 • 11570E • 01 0 • 11521E • 01
42 41 40	0.11475E+0 0.11376E+0	1 0.11565E+01 1 0.11481E+01 1 0.11381E+01	0.11486E+01 0.11383E+01	0.11489F+01	0.114905+01	0.114885+01	0.115722.01 0.11484E.01 0.11381E.01 0.11266E.01	0.11474F+01	0.11459E+01	0.114378+1
39 38 37	0+112635+0 0+111412+0 0+110186+0	1 G•11144E+01 1 G•11020E+01	0.11021E+01	0.11146E+01 0.11022E+01	0.11147E+01 0.11023E+01	0.11146E+01 0.11023E+01	L 0.11144E+01 L 0.11022E+01	0.11139E+01 0.11019E+01	0.11131E+01	0.11118E+01 0.11004E+C1
36 35 34	0.10892E+0 0.10767E+0 0.10646E+0	1 0.10770E+01 1 0.10649E+01	0.10771E+01 0.10651E+01	0.10772E+01 0.10652E+01	0.106546+01	0.10775E+01 0.10655E+01	1 0.10776E+01 1 0.10659E+01	0.10777E+01	0 • 1 0 777E • 01 0 • 1 0 664E • 01	0.10776E+01 0.10667E+01
33 32 31	0.10421E+0 0.10323E+0	1 0.10536E+01 1 0.10428E+01 1 0.10333E+01	0.10431E+01 0.10337E+01	0.10434E+01 0.10339E+01	0.10436E+01	0.103465+0	1 0.10444E+01 1 0.10351F+01	0.10357E+01	0.10456E+0 0.10366E+0	L 0.10466E+01 L 0.10378E+01
30 29 28	0.10236E+0 0.101635+0 0.10103E+0	1 0.10174E+01 1 0.10114E+01	0.10179E+01 0.10118E+01	0.10182E+01 0.10121E+01	0.10185E+01 0.10125E+01	0.10189E+0 0.10129E+0	1 0.10267E+01 1 0.10195E+01 1 0.10134E+01	0.10202E+0	0.10214E+0 0.10154E+0	1 0•10232E+01 1 0•10174E+01
27 26 25 24	0.10047E+0 0.99984E+0 0.996745+0	0 0.10007E+01 0 0.99752E+00	L 0.10012E+01 D 0.99788E+00	0.10064E+01 0.10015E+01 0.99813E+00	0.10018E+01 0.99840E+00	0.10022E+0 0.99873E+0	0 0.99920E+00	0.10035E+01	L 0.10049E+0 D 0.10014E+0	1 0.10074E+01 1 0.10042E+01
24	0.992206.0	0 0.99275E+00	0.99300E+00 0.99190E+00	0.99551E+00 0.99319E+00 0.992045+00	0.99575E+00 0.99340E+00 0.99219E+00) 0.99605E+0) 0.99365E+C) 0.99237E+0	0 0+99648E+0(0 0+99406E+0(C 0+99271E+0)	0 0.99725E+01 0 0.99488E+01 0 0.99353E+01	0 0.99670E+0 0 0.99545E+0	0 0.10019E+01 C 0.10000E+01 O C.99892E+C0
21 20 19	0.988435+0	0 0.98884E+00	0 0.98906E+00 0 0.98492F+00) 0.98923E+00) 0.98507F+00	0.98941E+00 0.98521E+00) 0.98963E+0) 0.98538F+0	0 0.99010E+0	D 0.99723E+0	0 0.990076+0	0 0.99743E+00 0 0.99453E+00 0 0.99060E+00

			-					
18 176 115 115 111 109 876 5 4 321	$\begin{array}{c} 0.934192 \pm 0.0 & 0.935042 \pm 0.0 \\ 0.865702 \pm 0.0 & 0.861992 \pm 0.0 \\ 0.83554 \pm 0.0 & 0.826262 \pm 0.0 \\ 0.83555 \pm 0.0 & 0.825612 \pm 0.0 \\ 0.83555 \pm 0.0 & 0.825612 \pm 0.0 \\ 0.83555 \pm 0.0 & 0.825612 \pm 0.0 \\ 0.91651 \pm 0.0 & 0.916312 \pm 0.0 \\ 0.91651 \pm 0.0 & 0.916312 \pm 0.0 \\ 0.97194 \pm 0.0 & 0.96856 \pm 0.0 \\ 0.97194 \pm 0.0 & 0.97278 \pm 0.0 \\ 0.98629 \pm 0.0 & 0.988712 \pm 0.0 \\ 0.98629 \pm 0.0 & 0.988712 \pm 0.0 \\ 0.98629 \pm 0.0 & 0.987312 \pm 0.0 \\ 0.98629 \pm 0.0 & 0.988572 \pm 0.0 \\ 0.98872 \pm 0.0 & 0.98852 \pm 0.0 \\ 0.99862 \pm 0.0 & 0.993252 \pm 0.0 \\ 0.99872 \pm 0.0 & 0.993055 \pm 0.0 \\ 0.991412 \pm 0.0 & 0.992055 \pm 0.0 \\ \end{array}$	0.814940E.0000 0.841940E.00000 0.9408E.00000 0.96692E.0000.91 0.96692E.0000.91 0.96692E.0000.91 0.96692E.0000.91 0.909314E.0000.91 0.909314E.0000.91 0.909314E.0000.91 0.98691E.0000.91 0.98692E.0000.91 0.98966E.0000.91 0.99934E.0000.91 0.99934E.0000.91 0.99934E.0000.91 0.99934E.0000.91 0.99934E.0000.91 0.99924E.0000.91 0.99924E.0000.91 0.99924E.00000.91 0.99924E.00000.91 0.99924E.00000.91 0.99924E.00000.91 0.99924E.000000000000000000000000000000000000	1356E 00 0.8244E t 4006E 00 0.8244E t 4006E 00 0.8244E t 6709E 00 0.9198T t 6709E 00 0.96773E t 6709E 00 0.96679E t 7771E 00 0.98827E t 828E 00 0.98827E t 8692E 00 0.98851E t 8692E 00 0.9885E t 840E 00 0.9895E t 8995E 00 0.9995E t 8995E 00 0.9905E t 905E 00 0.99213E t	$\begin{array}{c} 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$	0.45526.00 0.85526.00 0.931495.00 0.965785.00 0.965785.00 0.9675537.00 0.987765.00 0.986705.00 0.986705.00 0.986705.00 0.986705.00 0.98675.00 0.98635.00 0.986505.00 0.9790655.00 0.9790655.00	$\begin{array}{c} 0.8812 + 50 \\ 0.8812 + 8 + 50 \\ 0.974 + 8 + 50 \\ 0.974 + 8 + 50 \\ 0.974 + 8 + 50 \\ 0.974 + 12 + 50 \\ 0.974 + 12 + 50 \\ 0.977 + 12 + 50 \\ 0.997 + 12 + 50 \\ 0.999 + 12 + 50 \\ 0.999 + 12 + 50 \\ 0.986 + 55 + 50 \\ 0.986 + 55 + 50 \\ 0.986 + 55 + 50 \\ 0.986 + 55 + 50 \\ 0.986 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.987 + 55 + 50 \\ 0.997 + 55 + 50 \\ 0.997 + 55 + 50 \\ 0.997 + 55 + 55 \\ 0.977 + 55 + 55 \\ 0.977 + 55 + 55 \\ 0.977 + 55 + 55 \\ 0.977 $	$\begin{array}{c} 0.91313\xi + 00\\ 0.9087\xi + 00\\ 0.9538\xi + 00\\ 0.9538\xi + 00\\ 0.97538\xi + 00\\ 0.9753\xi + 00\\ 0.9752\xi + 00\\ 0.9808\xi + 00\\ 0.9808\xi + 00\\ 0.98198\xi + 00\\ 0.98178\xi + 00\\ 0.9875\xi + 00\\ 0.9878\xi + 00\\ 0.9878\xi + 00\\ 0.9878\xi + 00\\ 0.9879\xi + 00\\ 0.998\xi + 00\\ 0.988\xi + 0\\$	$\begin{array}{c} 0.938662*00\\ 0.935062*00\\ 0.942582*00\\ 0.962192*00\\ 0.962192*00\\ 0.981992*00\\ 0.981992*00\\ 0.991572*00\\ 0.991572*00\\ 0.991572*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.991202*00\\ 0.992952*000\\ 0.992952*00\\ 0.992952*00\\ 0.992952*00\\ 0.992952*00\\ 0.992952*0$
LZ= Z=	21 0.000000E+000.000000E+00	23 0+000000E+000+000	24 25 0000E+000.000000E+0	00.00000E+00	27 0.000000E+00	28 0.000000E+00	29 0.000000E+00	30 • 000000E +C 0
11111111111111111111111111111111111111	$\begin{array}{c} 0.997762 \pm 0.0 \\ 0.10015 \pm 0.0 \\ 0.99773 \pm 0.0 \\ 0.10012 \pm 0.0 \\ 0.99736 \pm 0.0 \\ 0.99756 \pm 0.0 \\ 0.1002 \pm 0.0 \\ 0.99756 \pm 0.0 \\ 0.1002 \pm 0.0 \\ 0.9946 5 \pm 0.0 \\ 0.9945 5 \pm 0.0 \\ 0.975 5 \pm 0.0 \\ 0.976 5 \pm 0.0 \\ 0.976 5 \pm 0.0 \\ 0.976 5 \pm 0.0 \\ 0.965 5 \pm 0.0 \\ 0.95 5 \pm 0.0$	$\begin{array}{c} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 $	$\begin{array}{c} 00123 \pm 01 & 0.1 \\ 0013 \pm 01 & 0.1 \\ 00007 \pm 0.1 \\ 00007 \pm 0.1 \\ 00007 \pm 0.1 \\ 0.1 \\ 00$	$ \begin{array}{c} 1 & 0 & 9 & 9 & 9 & 9 \\ 1 & 0 & - & 9 & 9 & 9 & 9 \\ 2 & 9 & 9 & 9 & 9 & 9 & 9 \\ 0 & 9 & 9 & 9 & 9 & 9 & 9 \\ 1 & 0 & - & 9 & 9 & 9 & 9 & 9 \\ 1 & 0 & - & 9 & 9 & 9 & 9 & 9 \\ 1 & 0 & - & 1 & 0 & 0 & 1 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 1 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 1 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 1 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 1 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & - & 0 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 9 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 9 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 9 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 7 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 7 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 7 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 7 & 0 & 0 & 0 & 0 \\ 0 & - & 9 & 7 & 0 & 0 & 0 \\ 0 & - & 9 & 7 & 7 & 0 & 0 \\ 0 & 0 & - & 9 & 7 & 7 & 0 & 0 \\ 0 & 0 & - & 9 & 7 & 7 & 0 & 0 \\ 0 & 0 & - & 9 & 7 & 7 & 0 & 0 \\ 0 & 0 & - & 9 & 7 & 7 & 0 & 0 \\ 0 & 0 & - & 9 & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & - & 7 & 7 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0.99691E + 00\\ 0.99691E + 00\\ 0.997576E + 00\\ 0.997576E + 00\\ 0.997576E + 00\\ 0.997576E + 00\\ 0.99784E + 00\\ 0.1000194 + 00\\ 0.1000194E + 00\\ 0.100035E + 00\\ 0.100035E + 00\\ 0.100035E + 00\\ 0.10035E + 00\\ 0.99597E + 00\\ 0.99597E + 00\\ 0.9979255E + 00\\ 0.997921E + 00\\ 0.997925E + 00\\ 0.997921E + 00\\ 0.997921E + 00\\ 0.997921E + 00\\ 0.9965E + 00\\ 0.99721E + 00\\ 0.997921E + 00\\ 0.997921$	$\begin{array}{c} 0 & .99 & 1 & 3 & 3 & 5 & .00 \\ 0 & .99 & 1 & 2 & 1 & 5 & .00 \\ 0 & .99 & 1 & 7 & 1 & 5 & .00 \\ 0 & .99 & 1 & 7 & 1 & 5 & .00 \\ 0 & .99 & 1 & 7 & 5 & .00 \\ 0 & .99 & 1 & 7 & 5 & .00 \\ 0 & .99 & 1 & 2 & .5 & .00 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 4 & .01 \\ 0 & .10 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & .01 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & .10 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 &$	$\begin{array}{c} 0 & -9 & 9 & 9 & 2 & 3 & 5 & + & 0 & 0 \\ 0 & -9 & 8 & 5 & 5 & 5 & + & 0 & 0 \\ 0 & -9 & 8 & 5 & 5 & + & 0 & 0 \\ 0 & -9 & 9 & 7 & 7 & 9 & 1 & + & 0 & 0 \\ 0 & -9 & 9 & 9 & 7 & 7 & 9 & 1 & + & 0 & 0 \\ 0 & -9 & 9 & 9 & 7 & 7 & 1 & + & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 1 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 1 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 1 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 2 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 2 & 0 & 4 & 0 & 0 & 0 \\ 0 & -1 & 0 & 2 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & -9 \ 7 \ 2 \ 0 \ 6 \ E \ + 0 \ 0 \ 0 \ 0 \ - 9 \ 7 \ 2 \ 0 \ 6 \ E \ + 0 \ 0 \ 0 \ 0 \ - 9 \ 7 \ 2 \ 0 \ 6 \ E \ + 0 \ 0 \ 0 \ - 9 \ 7 \ 2 \ 0 \ E \ + 0 \ 0 \ 0 \ - 9 \ 7 \ 2 \ 0 \ E \ + 0 \ 0 \ 0 \ - 9 \ 7 \ 0 \ - 1 \ 0 \ 0 \ 0 \ - 1 \ 0 \ - 1 \ 0 \ 0 \ - 1 \ 0 \ $

Λ.

Table VII. (cont)

.

666987654321098765432109876543210987654321098765432109876543210987654321098765432109876543210987654321098765432109876543210987654321098765432000000000000000000000000000000000000	$\begin{array}{c} 0 & 1 & 0 & 2 & 4 & 5 & 2 & 0 & 1 \\ 0 & 1 & 0 & 3 & 6 & 2 & 0 & 0 & 1 \\ 0 & 1 & 0 & 3 & 6 & 2 & 0 & 0 & 1 \\ 0 & 1 & 0 & 5 & 1 & 2 & 0 & 0 & 0 \\ 1 & 0 & 0 & 5 & 1 & 2 & 0 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 5 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 5 & 0 & 0 & 0 & 0 \\ 1 & 1 & 0 & 0 & 5 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 1 & 0 & 0 & 5 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 5 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 5 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0.100572 \pm 0.01\\ 0.10072 \pm 0.01\\ 0.10089 \pm 0.01\\ 0.10089 \pm 0.01\\ 0.100131 \pm 0.01\\ 0.10131 \pm 0.01\\ 0.11132 \pm 0.01\\ 0.11332 \pm 0.01\\ 0.11332 \pm 0.01\\ 0.1033 \pm $	$\begin{array}{c} 0 & 1 & 0 & 1 & 9 \\ 0 & 1 & 0 & 1 & 9 \\ 0 & 1 & 0 & 0 & 2 \\ 0 & 1 & 0 & 0 & 2 \\ 0 & 1 & 0 & 0 & 3 \\ 0 & 1 & 0 & 0 & 3 \\ 0 & 1 & 0 & 0 & 3 \\ 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 0 & 3 \\ 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 0 & 7 \\ 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 0 \\ 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 0 \\ 0 &$	0010E + 01 0011E + 01 0010E + 01 0010E + 01 0010E + 01 0010E + 01 0000E + 01 10000E + 01 1000	$\begin{array}{c} 0 & 1 \ 0 \ 0 \ 1 \ 4 \ 4 \ 4 \ 0 \ 1 \\ 0 & 1 \ 0 \ 0 \ 1 \ 4 \ 4 \ 4 \ 0 \ 1 \\ 0 & 1 \ 0 \ 0 \ 1 \ 4 \ 4 \ 4 \ 0 \ 1 \\ 0 & 1 \ 0 \ 0 \ 1 \ 0 \ 0 \ 1 \ 0 \ 0 \ 1 \ 0 \ 0$	$\begin{array}{c} 0 & 1 \\ 0 & 0 \\ 1 \\ 0 & 0 \\ 1 \\ 0 \\ 0 \\ 1 \\ 0 \\ 0 \\ 1 \\ 0 \\ 0 \\$	$\begin{array}{c} 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 0 & 5 & 6 & 0 & 1 \\ 0 & 1 & 3 & 0 & 0 & 5 & 6 & 0 & 0 \\ 1 & 0 & 0 & 3 & 6 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 6 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 6 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 6 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 6 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 6 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 5 & 5 & 6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & y \ y \ y \ y \ y \ z \ z \ v \ z \ z \ z \ z \ z \ z \ z$	$\begin{array}{c} 0 & 9 & 7 & 9 & 2 & 8 & 2 & 0 & 0 \\ 0 & 9 & 7 & 9 & 2 & 5 & 7 & 7 & 7 & 7 & 7 & 7 & 7 & 7 & 7$
---	--	---	---	--	---	---	--	---	--	---

LZ= Z=	1 C.000000E+000.0	2 000000E+000.0	3 00 0 0 0 0 0 + 0 0 0 0 0 0 0 0 0 + 1	5 100+000000E+000	0.000000E+000.00000E	+000.0000002+00	9.000000E+000.0	10 00000E+00
120 119 119 116 115 114 113 112 111	0.98787876000 0.988986000 0.989306000 0.98735000 0.98735000 0.987855000 0.981855000 0.981855000 0.961095000 0.96976000	97786E+00 0. 98897E+00 0. 98936E+00 0. 98723E+00 0. 98466E+00 0. 98109E+00 0. 98466E+00 0. 98466E+00 0. 98466E+00 0. 98466E+00 0. 984725E+00 0. 98470 0. 98470 0. 98470 0. 98470 0.	0.87A4€*00 0.987A55E 0.84955€*00 0.98845E* 0.8930E*00 0.98927E* 0.8672€*00 0.988427E* 0.84867E*00 0.988720E* 0.8487E*00 0.98884E* 0.8487E*00 0.98884E* 0.8407E*00 0.97634E* 0.6955E*00 0.99595E*	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	0.986.09E + 00 0.986.05E 0.987.84E + 00 0.987.75E 0.987.84E + 00 0.987.75E 0.987.94E + 00 0.987.82 0.988.02E + 00 0.988.02 0.988.02E + 00 0.986.7E 0.988.75E + 00 0.984.85E 0.981.10E + 00 0.984.85E 0.981.10E + 00 0.964.85E 0.976.75E + 00 0.96.247E 0.976.75E + 00 0.96.247E	+00 0.98764E+00 +00 0.98894E+00 +00 0.98895E+00 +00 0.98859E+00 +00 0.98859E+00 +00 0.988717E+00 +00 0.98482E+00 +00 0.97637E+00 +00 0.97637E+00	0+98776E+00 0+9876E+00 0+98866E+00 0+98866E+00 0+9874E+00 0+98724E+00 0+98724E+00 0+98101E+00 0+97622E+00 0+9689E+00 0+9689E+00 0	98780£+00 98890£+00 98920£+00 98854£+00 988711£+00 98476£+00 98105£+00 97632£+00 97632£+00 96997£+00

Table VII. (cont)

$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{c} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 $	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{c} 0.10229E { \circ 0 1 } 0.10230E { \circ 0 1 } 0.10130E { \circ 0 1 } 0.10114E { \circ 0 1 } 0.9452E { \circ 0 0 } 0.94525E { \circ 0 0 } 0.94525E { \circ 0 0 } 0.97697E { \circ 0 0 } 0.66535E { \circ 0 0 } 0.66535E { \circ 0 0 } 0.66535E { \circ 0 0 } 0.82668E { \circ 0 0 } 0.9735E { \circ 0 0 } 0.97352E { \circ 0 0 } 0.973726 { \circ 0 0 } 0.9737326 { \circ 0 0 } 0.9737$	$\begin{array}{c} 0.10230 \ even \\ 0.10230 \ even \\ 0.10115 \ even \\ 0.1015 \ e$
LZ= c.000000E+000.000000E	+000.0000000000000000000000000000000000	15 100.000000E+000.000000E+0	17 00.000000E+000.000000E+00	19 0+000000E+000+000000E+00
$ \begin{array}{c} 118 \\ 117 \\ 0 & 969 \\ 116 \\ 116 \\ 0 & 978 \\ 116 \\ 116 \\ 0 & 978 \\ 116 \\ 116 \\ 0 & 978 \\ 116 \\ 116 \\ 116 \\ 117 \\ 116 \\ 117 \\ 116 \\ 117 \\ 116 \\ 118 \\ 110 \\ $	$\begin{array}{c} 0 0 \cdot 9 \cdot 9 \cdot 9 \cdot 9 \cdot 0 \\ 0 \cdot 9 \cdot 8 \cdot 4 \cdot 0 \\ 0 \cdot 9 \cdot 8 \cdot 4 \cdot 4 \cdot 0 \\ 0 \cdot 9 \cdot 8 \cdot 4 \cdot 4 \cdot 0 \\ 0 \cdot 9 \cdot 8 \cdot 4 \cdot 4 \cdot 0 \\ 0 \cdot 9 \cdot 8 \cdot 4 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 8 \cdot 4 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 8 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 8 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 4 \cdot 6 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 4 \cdot 6 \cdot 4 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 5 \cdot 4 \cdot 2 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 1 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 3 \cdot 5 \\ 0 \cdot 0 \cdot 9 \cdot 1 \\ 0 \cdot 0 \cdot 1 \\ 0 \cdot 1 \\ 0 \cdot 0 \cdot 1 \\ 0 \cdot 1 \\ 0 \cdot 0 \cdot 1 \\ 0 \cdot 1$	$ \begin{array}{c} 10 & 0.988372 \pm 0.0 & 0.988372 \pm 0.0 \\ 0.988372 \pm 0.0 & 0.988372 \pm 0.0 \\ 0.988372 \pm 0.0 & 0.988372 \pm 0.0 \\ 0.988472 \pm 0.0 & 0.988387 \pm 0.0 \\ 0.988472 \pm 0.0 & 0.988387 \pm 0.0 \\ 0.988472 \pm 0.0 & 0.988487 \pm 0.0 \\ 0.988472 \pm 0.0 & 0.988477 \pm 0.0 \\ 0.988478 \pm 0.0 & 0.988478 \pm 0.0 \\ 0.988478 \pm 0.0 & 0.988478 \pm 0.0 \\ 0.988478 \pm 0.0 & 0.88478878 \pm 0.0 \\ 0.988478 \pm 0.0 & 0.884788878 \pm 0.0 \\ 0.988478 \pm 0.0 & 0.884788878 \pm 0.0 \\ 0.9884788 \pm 0.0 & 0.88478888 \pm 0.0 \\ 0.98847888 \pm 0.0 & 0.88478888 \pm 0.0 \\ 0.988478888 \pm 0.0 & 0.88478888 \pm 0.0 \\ 0.988478888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.988478888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.98847888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.9884788888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.988478888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.9884788888 \pm 0.0 & 0.88478888 \pm 0.0 \\ 0.9884788888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.9884788888888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.988478888888 \pm 0.0 & 0.8847888 \pm 0.0 \\ 0.98847888888 \pm 0.0 & 0.88478888 \pm 0.0 \\ 0.9884788888888 \pm 0.0 & 0.88478888 \pm 0.0 \\ 0.988478888888 \pm 0.0 & 0.884788888 \pm 0.0 \\ 0.9884788888888 \pm 0.0 & 0.884788888 \pm 0.0 \\ 0.988478888888888 \pm 0.0 & 0.888478888 \pm 0.0 \\ 0.98887888888888 \pm 0.0 & 0.88847888888888888888888888888888888888$	$ \begin{array}{c} 0 & 0 & 9 & 9 & 1 & 4 & \pm & 0 & 0 & 0 & 9 & 9 & 6 & 5 & 4 & \pm & 0 \\ 0 & 0 & 9 & 8 & 7 & 1 & 4 & \pm & 0 & 0 & 0 & 9 & 6 & 5 & 8 & 4 & \pm & 0 \\ 0 & 0 & 9 & 8 & 7 & 1 & 4 & \pm & 0 & 0 & 0 & 9 & 6 & 5 & 8 & 8 & \pm & 0 \\ 0 & 0 & 9 & 8 & 7 & 8 & \pm & 0 & 0 & 0 & 9 & 1 & 6 & 3 & \pm & 0 \\ 0 & 0 & 9 & 9 & 7 & 8 & 5 & \pm & 0 & 0 & 0 & 9 & 7 & 8 & 3 & 5 & \pm & 0 \\ 0 & 0 & 9 & 9 & 7 & 8 & 7 & 5 & \pm & 0 & 0 & 0 & 9 & 7 & 8 & 3 & 5 & \pm & 0 \\ 0 & 0 & 9 & 9 & 7 & 8 & 7 & 5 & \pm & 0 & 0 & 0 & 9 & 7 & 8 & 3 & 5 & \pm & 0 \\ 0 & 0 & 9 & 9 & 7 & 8 & 7 & 5 & \pm & 0 & 0 & 0 & 9 & 7 & 8 & 5 & \pm & 5 \\ 0 & 0 & 9 & 9 & 7 & 8 & 7 & 5 & \pm & 0 & 0 & 0 & 9 & 6 & 5 & 5 & \pm & 5 \\ 0 & 0 & 9 & 9 & 2 & 5 & 7 & \pm & 0 & 0 & 0 & 9 & 5 & 8 & 5 & \pm & 5 \\ 0 & 0 & 9 & 9 & 2 & 5 & 7 & 0 & 0 & 9 & 9 & 5 & 8 & 5 & \pm & 5 \\ 0 & 0 & 9 & 9 & 2 & 5 & 7 & 5 & 0 & 0 & 9 & 9 & 5 & 8 & 5 & \pm & 5 \\ 0 & 0 & 9 & 9 & 2 & 5 & 5 & \pm & 0 & 0 & 0 & 9 & 7 & 8 & 5 & 5 & \pm & 5 \\ 0 & 0 & 9 & 9 & 2 & 5 & 5 & \pm & 0 & 0 & 0 & 9 & 7 & 8 & 5 & 5 & \pm & 5 \\ 0 & 0 & 0 & 9 & 2 & 5 & 5 & \pm & 0 & 0 & 0 & 8 & 7 & 8 & 4 & 8 & 3 & \pm & 0 \\ 0 & 0 & 8 & 9 & 2 & 5 & 5 & 0 & 0 & 8 & 8 & 4 & 8 & 3 & \pm & 0 \\ 0 & 0 & 8 & 9 & 2 & 5 & 5 & 0 & 0 & 0 & 8 & 8 & 4 & 8 & 3 & \pm & 0 \\ 0 & 0 & 8 & 1 & 2 & 5 & 0 & 0 & 0 & 8 & 8 & 4 & 8 & 3 & \pm & 0 \\ 0 & 0 & 8 & 1 & 2 & 5 & 0 & 0 & 0 & 8 & 8 & 4 & 8 & 3 & \pm & 0 \\ 0 & 0 & 8 & 1 & 2 & 5 & 0 & 0 & 0 & 7 & 9 & 7 & 5 & \pm & 0 \\ 0 & 0 & 0 & 8 & 1 & 5 & 5 & 0 & 0 & 0 & 7 & 9 & 7 & 5 & \pm & 0 \\ 0 & 0 & 0 & 1 & 7 & 0 & 7 & 0 & 0 & 0 & 8 & 8 & 0 & 0 & 7 & 7 & 7 & 5 & \pm & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 &$	$\begin{array}{c} 0 + 0 \\ 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 + 0 + 0 \\ 0 + 0 + 0 \\ 0 + 0 + 0 + 0 \\ 0 + 0 + 0 \\ 0 + 0 + 0 \\ 0 + 0 + 0 \\ 0 + 0 + 0 \\ $

2210987654321098765432109876543210987654321098765432109876543210987654321098765432109876543210987654321	0.4522E00 0.4762E00 0.4763E00 0.4763E00 0.47645E00 0.5051E000 0.5051E000 0.5051E000 0.5051E000 0.5051E000 0.5051E000 0.5051E000 0.5051E000 0.5051E000 0.15150E00 0.1525E00 0.16436E00 0.16436E00 0.16436E00 0.16436E00 0.16436E00 0.16592E00 0.16436E00 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E000 0.15125E0000 0.15125E0000000000000000000000000000000000	$\begin{array}{c} 0 & 1 & 4 & 4 & 8 & 1 & 1 & 0 & 0 \\ 0 & 1 & 4 & 7 & 8 & 1 & 6 & 0 & 1 \\ 0 & 1 & 1 & 8 & 7 & 1 & 1 & 0 & 0 \\ 1 & 5 & 0 & 3 & 2 & 0 & 0 \\ 1 & 5 & 0 & 3 & 2 & 0 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 1 & 0 \\ 0 & 1 & 5 & 0 & 1 & 0 & 0 & 1 \\ 0 & 1 & 5 & 0 & 1 & 0 & 0 & 1 \\ 0 & 1 & 5 & 0 & 1 & 0 & 0 & 1 \\ 0 & 1 & 5 & 0 & 0 & 1 & 0 & 1 \\ 0 & 1 & 5 & 0 & 0 & 0 & 0 & 0 \\ 1 & 6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 6 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{c} 0 & 1 & 4 & 48 & 22 & 2 & 0 & 0 \\ 0 & 1 & 4 & 87 & 22 & 0 & 0 \\ 0 & 1 & 4 & 87 & 22 & 0 & 0 \\ 0 & 1 & 4 & 87 & 22 & 0 & 0 \\ 1 & 4 & 87 & 92 & 22 & 0 & 0 \\ 1 & 5 & 37 & 88 & 0 & 0 \\ 1 & 5 & 37 & 88 & 0 & 0 \\ 0 & 1 & 5 & 37 & 88 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 68 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 5 & 1 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 3 & 0 & 5 & 0 & 0 \\ 0 & 1 & 0 & 0 & 2 & 0 & 0 \\ 0 & 1 & 0 & 0 & 2 & 0 & 0 \\ 0 & 1 & 0 & 0 & 2 & 0 & 0 \\ 0 & 1 & 0 & 0 & 2 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 1 \\$	$\begin{array}{c} 0 & 1 \\ 0 & 1 \\ 7 \\ 5 \\ 7 \\ 8 \\ 7 \\ 7 \\ 8 \\ 7 \\ 7 \\ 8 \\ 7 \\ 7$	$\begin{array}{c} 0 & 1 \\ 0 & 1 \\ 0 & 1 \\ 4 \\ 5 \\ 3 \\ 5 \\ 1 \\ 5 \\ 1 \\ 5 \\ 5 \\ 1 \\ 5 \\ 5 \\ 5$	$\begin{array}{c} 0 & 1 & 3 & 9 & 7 & 8 & 0 & 0 \\ 0 & 1 & 4 & 1 & 1 & 8 & 0 & 0 \\ 0 & 1 & 4 & 4 & 1 & 1 & 8 & 0 & 0 \\ 0 & 1 & 4 & 4 & 1 & 1 & 8 & 0 & 0 \\ 0 & 1 & 4 & 6 & 1 & 8 & 0 & 0 \\ 1 & 5 & 0 & 1 & 5 & 0 & 6 & 1 \\ 0 & 0 & 1 & 5 & 0 & 0 & 1 & 5 \\ 0 & 0 & 1 & 5 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 \\ 0 & 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 5 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 5 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 5 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 1 \\ 2 \\ 5 \\ 5 \\ 6 \\ 6 \\ 6 \\ 6 \\ 7 \\ 7 \\ 7 \\ 7 \\ 7 \\ 7$	$\begin{array}{c} 0 & 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 2 \\ 1 \\ 1$	$\begin{array}{c} 0 & 1 & 0 & 4 & 3 & 4 & 7 & 6 & 0 \\ 0 & 1 & 0 & 4 & 7 & 4 & 0 & 0 \\ 0 & 1 & 0 & 4 & 7 & 7 & 4 & 0 & 0 \\ 1 & 0 & 1 & 0 & 5 & 7 & 6 & 4 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 0 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 5 & 7 & 6 & 4 & 0 & 0 \\ 1 & 1 & 2 & 7 & 7 & 6 & 6 & 0 & 0 \\ 1 & 1 & 3 & 7 & 7 & 7 & 6 & 6 & 0 & 0 \\ 1 & 1 & 3 & 7 & 7 & 7 & 6 & 6 & 0 & 0 \\ 1 & 1 & 3 & 7 & 7 & 7 & 6 & 6 & 0 & 0 \\ 1 & 1 & 3 & 7 & 7 & 7 & 6 & 6 & 0 & 0 \\ 1 & 1 & 3 & 7 & 7 & 7 & 7 & 6 & 0 & 0 \\ 1 & 1 & 3 & 5 & 7 & 7 & 7 & 7 & 0 & 0 \\ 1 & 1 & 3 & 5 & 7 & 7 & 7 & 7 & 0 & 0 \\ 1 & 1 & 3 & 5 & 7 & 7 & 7 & 7 & 7 & 7 & 7 & 7 \\ 0 & 1 & 1 & 3 & 5 & 7 & 7 & 7 & 7 & 7 & 7 & 7 & 7 & 7$	
Z= 120										30 0.0000000E+00 0.97168E+00 0.97168E+00	
$ \begin{array}{r} 119 \\ 118 \end{array} $	0.99307E+00 0.99307E+00	0.10014E+01 0.10019E+01	0+10050E+01 0+10063E+01	0.10033E+01 0.10042E+01	0.1000AE+01 0.10013E+01	0.99981E+00 0.99952E+00	0.99585E+00 0.99725E+00	0.98958E+00 0.99197E+00	0+98938E+00 0+98894E+00	0.97168E+0C 0.97168E+00	

87 86 85

 1
 0.12027F.01
 0.1175.01
 0.1175.01
 0.1175.01
 0.1175.01
 0.1175.01
 0.1175.01
 0.1175.01
 0.1175.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 0.1075.01
 ***** TEMP LZ= 1 Z= 0.000000E+000.00000

Table VII. (cont)

.

8432 8832 8832 8832 8832 8832 887777777777	U 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	$\begin{array}{c} 0.84 43 7 E + 0.0 \\ 0.84 43 7 E + 0.0 \\ 0.83 80 7 E + 0.0 \\ 0.83 80 7 E + 0.0 \\ 0.83 80 7 E + 0.0 \\ 0.83 7 7 E + 0.0 \\ 0.83 80 7 E + 0.0 \\ 0.82 83 80 7 E + 0.0 \\ 0.82 83 80 7 E + 0.0 \\ 0.82 83 80 7 E + 0.0 \\ 0.82 80 80 8 + 0.0 \\ 0.82 80 80 8 + 0.0 \\ 0.87 80 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 80 8 + 0.0 \\ 0.87 8 $	$\begin{array}{c} 0 & - 3 & - 3 & - 5 & -$	0 + 3 + 4 + 6 + 7 + 8 + 0 + 0 + 0 + 3 + 4 + 6 + 7 + 8 + 0 + 0 + 0 + 3 + 5 + 8 + 0 + 0 + 0 + 3 + 5 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 8 + 0 + 0 + 0 + 3 + 3 + 2 + 0 + 0 + 3 + 3 + 2 + 0 + 0 + 3 + 3 + 2 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 2 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 4 + 1 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 4 + 0 + 0 + 0 + 3 + 3 + 3 + 0 + 0 + 0 + 3 + 3	0, 10 ,	$\begin{array}{c} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{c} \bullet \bullet$	$\begin{array}{c} 0 & 1 & 1 & 2 & 0 & 5 & 1 & 4 & 0 \\ 0 & 1 & 1 & 2 & 0 & 5 & 1 & 4 & 0 \\ 0 & 1 & 1 & 3 & 0 & 5 & 1 & 4 & 0 \\ 0 & 1 & 1 & 3 & 4 & 0 & 1 & 0 \\ 0 & 1 & 1 & 5 & 2 & 2 & 4 & 0 & 1 \\ 0 & 1 & 1 & 5 & 2 & 2 & 4 & 0 & 1 \\ 0 & 1 & 1 & 5 & 2 & 2 & 4 & 0 & 1 \\ 0 & 1 & 1 & 5 & 1 & 2 & 4 & 0 & 1 \\ 0 & 1 & 1 & 5 & 1 & 2 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 7 & 7 & 5 & 4 & 0 & 1 \\ 0 & 1 & 1 & 5 & 7 & 5 & 6 & 0 & 1 \\ 0 & 1 & 1 & 5 & 7 & 5 & 6 & 0 & 1 \\ 0 & 1 & 1 & 2 & 7 & 5 & 5 & 6 & 0 & 1 \\ 0 & 1 & 1 & 2 & 7 & 5 & 5 & 6 & 0 & 1 \\ 0 & 1 & 1 & 2 & 7 & 5 & 5 & 6 & 0 & 1 \\ 0 & 1 & 1 & 7 & 7 & 5 & 5 & 6 & 0 & 0 \\ 0 & 1 & 1 & 1 & 7 & 7 & 5 & 5 & 6 & 0 & 0 \\ 0 & 1 & 1 & 1 & 7 & 7 & 5 & 5 & 6 & 0 & 0 \\ 0 & 1 & 1 & 1 & 7 & 7 & 5 & 6 & 0 & 0 \\ 0 & 1 & 1 & 1 & 2 & 7 & 5 & 5 & 6 & 0 & 0 \\ 0 & 1 & 1 & 1 & 2 & 7 & 5 & 5 & 6 & 0 & 0 \\ 0 & 1 & 0 & 7 & 0 & 5 & 6 & 5 & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 6 & 5 & 7 & 5 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 5 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 5 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 6 & 6 & 6 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 &$	$ \begin{array}{c} 0.11379 \overline{0} + 0.1\\ 0.11379 \overline{0} + 0.1\\ 0.11353 \overline{0} + 0.1\\ 0.11539 \overline{0} + 0.1\\ 0.11539 \overline{0} + 0.1\\ 0.11794 \overline{0} + 0.1\\ 0.11794 \overline{0} + 0.1\\ 0.11794 \overline{0} + 0.1\\ 0.11795 \overline{0} + 0.1\\ 0.11795 \overline{0} + 0.1\\ 0.1195 \overline{0} + 0.1\\ 0.12003 \overline{0} + 0.1\\ 0.12003 \overline{0} + 0.1\\ 0.1195 \overline{0} + 0.1\\ 0.10947 \overline{1} + 0.1\\ 0.10947$	0.11314E + 01 0.11431E + 01 0.11493E + 01 0.11563E + 01 0.11563E + 01 0.11563E + 01 0.11563E + 01 0.11750E + 01 0.11750E + 01 0.12133E + 01 0.12135E + 01 0.12135E + 01 0.12135E + 01 0.12156E + 01 0.12156E + 01 0.12156E + 01 0.12156E + 01 0.11352E + 01 0.11352E + 01 0.11352E + 01 0.11356F + 01 0.115567E + 01 0.11557E + 01 0.1157E + 01 0.1157E + 01 0.1157E + 01 0.1157E + 01 0.10753E + 00 0.997755E + 00 0.99775
10 9 8 7 6 5	0.86817E+0 0.86817E+0 0.86711E+0 0.86605E+0 0.86605E+0 0.86500E+0 0.86394E+0	0 0+87458E+00 0 0+87462E+00 0 0+87457E+00 0 0+8738PE+00 0 0+8738PE+00 0 0+87211E+00 0 0+87083E+00	0.88448E+00 0.88457E+00 0.88612E+00 0.88601E+00 0.88601E+00 0.88313E+00 0.88132E+00	0.89798E+00 0.89818E+00 0.90202E+00 0.90275E+00 0.90275E+00 0.89838E+00 0.89634E+00	0.91463E+00 0.91513E+00 0.92208E+00 0.92398E+00 0.92398E+00 0.91785E+00 0.91785E+00	0 •93214E+00 0 •93329E+00 0 •94390E+00 0 •94731E+00 0 •93958E+00 0 •93958E+00	0 0+94692E+00 0 0+94906E+00 0 0+96308E+00 0 0+96796E+00 0 0+95942E+00 0 0+95688E+00	0 0.95696E+0 0 0.96009E+0 0 0.97621E+0 0 0.98199E+0 0 0.97363E+0 C 0.97158E+0	0 0.96288E+00 0 0.96671E+00 0 0.98344E+00 0 0.9839E+00 0 0.98180E+00 0 0.98180E+00 0 0.98029E+00	$\begin{array}{c} 0.85715E+00\\ 0.991715E+00\\ 0.996409E+00\\ 0.996604E+00\\ 0.997024E+00\\ 0.997024E+00\\ 0.99236E+00\\ 0.99236E+00\\ 0.998460E+00\\ 0.998460E+00\\ \end{array}$

4 3 2 1	0.86288E+00 0.86972E+00 0.85758E+00 0.86459E+00 0.85229E+00 0.85947E+00 0.85229E+00 0.85947E+00 0.84700E+00 0.85435E+00	0.88035E+00 0.87549E+00 0.87067E+00	0.89515E+00 0.89072E+00 0.88635E+00	0.91429E+00 0.91055E+00 0.90687E+00	0.93615E+00 0.933445+00 0.93077E+00	C.95677E+0C 0.95535E+00 0.95398E+00	0.97219E+00 0.97203E+00 0.97189E+00	0.98136E+00 0.98200E+00 0.98266E+00	0+98593E+00 0+98699E+00 C+98808E+00
LZ= Z=	0.000000E+000.000000E+00	13	14	15	16	17	18	19	20
120 119 118 117 116 115 114	$ \begin{array}{c} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 $	0 + 9 + 3 + 3 + 5 + 0 = 0 0 + 9 + 3 + 8 + 0 = 0 0 + 9 + 3 + 8 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 3 + 5 + 0 = 0 0 + 9 + 1 + 0 = 0 0 + 1 + 0 + 0 = 0 0 + 0 + 0 + 0 + 0 + 0 = 0 0 + 0 + 0 + 0 + 0 + 0 = 0 0 + 0 + 0 + 0 + 0 + 0 = 0 0 + 0 + 0	$\begin{array}{c} 0.993202 \leftarrow 000\\ 0.993402 \leftarrow 000\\ 0.993179 \leftarrow 000\\ 0.100379 \leftarrow 000\\ 0.10037$	$\begin{array}{c} 0.99312 \\ 0.993412 \\ 0.993$	$\begin{array}{c} 0 & 9 & 9 & 3 & 0 & 2 & 1 \\ 0 & 9 & 9 & 3 & 0 & 2 & 1 \\ 0 & 0 & 9 & 9 & 3 & 0 & 2 & 1 \\ 0 & 0 & 0 & 9 & 9 & 3 & 1 \\ 0 & 0 & 0 & 9 & 9 & 3 & 1 \\ 0 & 0 & 0 & 0 & 9 & 1 \\ 0 & 0 & 0 & 0 & 9 & 1 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 99 & 277 & 178 & 190 \\ 0 & 99 & 379 & 148 & 190 \\ 0 & 99 & 379 & 148 & 190 \\ 0 & 99 & 379 & 148 & 190 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 149 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 148 & 180 \\ 0 & 99 & 180 & 180 \\ 0 & 110 & 120 & 180 \\ 0 & 1$	$\begin{array}{c} 0 & \\ 9 & \\$	$\begin{array}{c} 0 & 9 & 9 & 2 & 2 & 4 & 5 & 0 & 0 \\ 0 & 9 & 9 & 2 & 7 & 1 & 5 & 0 & 0 \\ 0 & 9 & 9 & 2 & 7 & 1 & 5 & 0 & 0 \\ 0 & 9 & 9 & 2 & 7 & 1 & 5 & 0 & 0 \\ 0 & 9 & 9 & 2 & 7 & 1 & 5 & 0 & 0 \\ 0 & 9 & 9 & 2 & 7 & 1 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 7 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 7 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 7 & 5 & 0 & 0 \\ 0 & 9 & 9 & 1 & 7 & 5 & 0 & 0 \\ 0 & 9 & 8 & 5 & 7 & 1 & 0 & 0 \\ 0 & 9 & 8 & 5 & 7 & 1 & 0 & 0 \\ 0 & 9 & 8 & 5 & 7 & 1 & 0 & 0 \\ 0 & 9 & 8 & 5 & 7 & 1 & 0 & 0 \\ 0 & 9 & 8 & 5 & 7 & 1 & 0 & 0 \\ 0 & 9 & 8 & 5 & 7 & 1 & 0 & 0 \\ 0 & 9 & 7 & 8 & 1 & 5 & 0 & 0 \\ 0 & 9 & 9 & 5 & 2 & 1 & 0 & 0 \\ 0 & 9 & 9 & 5 & 2 & 1 & 0 & 0 \\ 0 & 9 & 9 & 5 & 2 & 1 & 0 & 0 \\ 0 & 9 & 9 & 0 & 2 & 1 & 0 & 1 & 0 \\ 0 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 8 & 9 & 9 & 0 & 2 & 1 & 0 & 0 \\ 0 & 1 & 9 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 9 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 &$	$\begin{array}{c} 0.993866 \pm 0.0\\ 0.99465 \pm 0.0\\ 0.99355 \pm 0.0\\ 0.99355 \pm 0.0\\ 0.99355 \pm 0.0\\ 0.99164 \pm 0.0\\ 0.99178 \pm 0.0\\ 0.97779 \pm 0.0\\ 0.9775 \pm 0.0\\ 0.9745 \pm 0.0\\ 0.975 \pm 0.0\\ 0.975 \pm 0.0\\ 0.10275 \pm 0.0\\ 0.005 \pm 0.0\\ 0.005 \pm 0.0\\ 0.005 \pm 0.0\\ 0.005 \pm$

87654321098765432109876543210987654321098765432	$\begin{array}{c} 0. 11672E \times 01 0. 11718E \times 01 \\ 0. 1160RE \times 01 0. 11600E \times 01 \\ 0. 1160RE \times 01 0. 11602E \times 01 \\ 0. 11556E \times 01 0. 11612E \times 01 \\ 0. 11556E \times 01 0. 11862E \times 01 \\ 0. 11556E \times 01 0. 11848E \times 01 \\ 0. 11376E \times 01 0. 11348E \times 01 \\ 0. 11376E \times 01 0. 11348E \times 01 \\ 0. 11255E \times 01 0. 11348E \times 01 \\ 0. 11255E \times 01 0. 11262E \times 01 \\ 0. 11265E \times 01 0. 11262E \times 01 \\ 0. 11265E \times 01 0. 1020E \times 01 \\ 0. 10716E \times 01 0. 1020E \times 01 \\ 0. 10716E \times 01 0. 0536E \times 01 \\ 0. 1053E \times 01 0. 0536E \times 01 \\ 0. 10732E \times 01 0. 0536E \times 01 \\ 0. 10732E \times 01 0. 0536E \times 01 \\ 0. 10732E \times 01 0. 0033E \times 01 \\ 0. 10732E \times 01 0. 0033E \times 01 \\ 0. 10732E \times 01 0. 0033E \times 01 \\ 0. 10732E \times 01 0. 0033E \times 01 \\ 0. 10732E \times 01 0. 00357E \times 01 \\ 0. 10732E \times 01 0. 00377E \times 01 \\ 0. 10732E \times 01 0. 00377E \times 01 \\ 0. 10732E \times 01 0. 00377E \times 01 \\ 0. 10732E \times 01 0. 00377E \times 01 \\ 0. 99674E \times 00 0. 995752E \times 00 \\ 0. 997220E \times 00 0. 995752E \times 00 \\ 0. 99723E \times 00 0. 995752E \times 00 \\ 0. 99723E \times 00 0. 995752E \times 00 \\ 0. 99742E \times 00 0. 995752E \times 00 \\ 0. 99742E \times 00 0. 995752E \times 00 \\ 0. 99742E \times 00 0. 995752E \times 00 \\ 0. 99742E \times 00 0. 995752E \times 00 \\ 0. 988A52E \times 00 0. 995752E \times 00 \\ 0. 987452E \times 00 0. 995752E \times 00 \\ 0. 987452E \times 00 0. 995752E \times 00 \\ 0. 987452E \times 00 0. 995752E \times 00 \\ 0. 987452E \times 00 0. 995752E \times 00 \\ 0. 987452E \times 00 0. 995752E \times 00 \\ 0. 987452E \times 00 0. 97575E \times 00 \\ 0. 98755E \times 00 0. 98575E \times 00 \\ 0. 98755E \times 00 0. 98575E \times 00 \\ 0. 98755E \times 00 0. 98575E \times 00 \\ 0. 98755E \times 00 0. 98575E \times 00 \\ 0. 98755E \times 00 0. 97577E \times 00 \\ 0. 98755E \times 00 0. 97577E \times 00 \\ 0. 97575E \times 00 0. 97577E \times 00 \\ 0. 986575E \times 00 0. 97577E \times 00 \\ 0. 986575E \times 00 0. 97577E \times 00 \\ 0. 986575E \times 00 0. 97572E \times 00 \\ 0. 986575E \times 00 0. 97572E \times 00 \\ 0. 986575E \times 00 0. 97577E \times 00 \\ 0. 986575E \times 00 0. 97575E \times 00 \\ 0. 986575E \times 00 0. 98677E \times 00 \\ 0. 986575E \times 00 0. 97577E \times 00 \\ 0. 986575E \times 00 0. 97575E \times 00 \\ 0. 987555E \times 00 0. 98677E \times 00 \\ 0. 987555E \times 00 0. 98755E \times 00 \\ 0. 987555E $	$\begin{array}{c} 0 & 1 1 \left(^{*} 3 \\ 1 \\ + 4 \\ + 0 \\ 1 \\ 1 \\ - 1 \\ + 1 \\ + 0$	$ \begin{array}{c} 1 & 0 & 1 & 1 & 1 & 7 & 6 & F & 0 \\ 1 & 0 & 1 & 1 & 1 & 6 & 5 & F & 0 \\ 1 & 0 & 1 & 1 & 1 & 6 & 5 & F & 0 \\ 1 & 0 & 1 & 1 & 6 & 5 & F & 0 \\ 1 & 0 & 1 & 1 & 6 & 5 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 1 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 7 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & F & 0 \\ 1 & 0 & 1 & 0 & 5 & 5 & 1 & 0 & 0 & 9 & 7 & 5 & 5 \\ 1 & 0 & 0 & 9 & 7 & 5 & 5 & 0 & 0 & 9 & 9 & 3 & 5 & 5 \\ 1 & 0 & 0 & 9 & 7 & 5 & 5 & 0 & 0 & 9 & 9 & 3 & 5 & 5 \\ 1 & 0 & 0 & 9 & 0 & 5 & 7 & 5 & 0 & 0 & 0 & 9 & 9 & 3 & 5 & 5 \\ 0 & 0 & 9 & 9 & 5 & 1 & 0 & 0 & 0 & 9 & 9 & 3 & 5 & 0 \\ 0 & 0 & 9 & 0 & 5 & 7 & 5 & 0 & 0 & 0 & 9 & 9 & 3 & 5 & 0 \\ 0 & 0 & 9 & 0 & 5 & 7 & 5 & 0 & 0 & 0 & 9 & 7 & 5 & 5 & 1 \\ 0 & 0 & 0 & 0 & 7 & 1 & 5 & 0 & 0 & 0 & 9 & 7 & 5 & 5 \\ 0 & 0 & 0 & 9 & 0 & 7 & 1 & 5 & 0 & 0 & 0 & 9 & 7 & 5 & 5 \\ 0 & 0 & 0 & 9 & 0 & 7 & 1 & 5 & 0 & 0 & 0 & 9 & 7 & 5 & 5 \\ 0 & 0 & 0 & 9 & 0 & 0 & 0 & 0 & 0 & 0 &$	$\begin{array}{c} 1 \\ 0 & 11 \\ 0$	$ \begin{array}{c} 0 & 0 & 1 & 1 & 1 & 0 & 0 & 1 & 1 & 0 & 0$
L Z = Z =					29 000.000000000000000000000000000000000
120 119 117 117 115 117 115 117 115 117 115 117 115 105 105 105 105 105 105 105 105 105	$\begin{array}{c} 0.99762E \star 0.0 & 0.10015E \star 0.1\\ 0.99773E \star 0.0 & 0.10019E \star 0.1\\ 0.99773E \star 0.0 & 0.10023E \star 0.1\\ 0.9970E \pm 0.0 & 0.10023E \star 0.1\\ 0.99074 \pm 0.0 & 0.10019E \star 0.1\\ 0.9903E \star 0.0 & 0.99386E \star 0.1\\ 0.99087E \star 0.0 & 0.99386E \star 0.1\\ 0.99087E \star 0.0 & 0.99386E \star 0.1\\ 0.99087E \star 0.0 & 0.99239E \star 0.1\\ 0.98544E \star 0.0 & 0.99239E \star 0.1\\ 0.9808 \pm 0.0 & 0.98374E \star 0.1\\ 0.97808E \star 0.0 & 0.98575E \star 0.1\\ 0.97808E \star 0.0 & 0.98575E \star 0.1\\ 0.97808E \star 0.0 & 0.98575E \star 0.1\\ 0.97818E \star 0.0 & 0.98575E \star 0.1\\ 0.97818E \star 0.0 & 0.98575E \star 0.1\\ 0.97551E \star 0.0 & 0.982575E \star 0.1\\ 0.9551E \star 0.0 & 0.98458E \star 0.1\\ 0.99551E \star 0.0 & 0.98575E \star 0.1\\ 0.994136E \star 0.0 & 0.96377E \star 0.1\\ 0.93149E \star 0.0 & 0.95529E \star 0.1\\ 0.931416E \star 0.0 & 0.94239E \star 0.1\\ 0.9312E \star 0.0 & 0.93159E \star 0.1\\ 0.93037E \star 0.0 & 0.9150E \star 0.1\\ 0.90337E \star 0.0 & 0.91523E \star 0.1\\ 0.90309E \star 0.0 & 0.91523E \star 0.1\\ 0.90309E \star 0.0 & 0.91523E \star 0.1\\ 0.90309E \star 0.0 & 0.9174E \star 0.1\\ 0$	$ \begin{array}{c} 0.10029E * 01 & 0.10019E * \\ 0.10036E * 01 & 0.10032E * \\ 0.10035E * 01 & 0.10028E * \\ 0.10050E * 01 & 0.10034E * \\ 0.10055E * 01 & 0.10035E * \\ 0.10055E * 01 & 0.10035E * \\ 0.10065E * 01 & 0.10085E * \\ 0.10065E * 01 & 0.10085E * \\ 0.10064E * 01 & 0.10085E * \\ 0.10032E * 01 & 0.10096E * \\ 0.10032E * 01 & 0.10096E * \\ 0.10032E * 01 & 0.10096E * \\ 0.10032E * 01 & 0.10015E * \\ 0.10032E * 01 & 0.10015E * \\ 0.10032E * 01 & 0.10036E * \\ 0.093932E * 00 & 0.10036E * \\ 0.09352E * 00 & 0.99813E * \\ 0.09352E * 00 & 0.99813E * \\ 0.09352E * 00 & 0.99813E * \\ 0.09352E * 00 & 0.99837E * \\ 0.09352E * 00 & 0.99832E * \\ 0.0932E * 00 & 0.9983E * \\ 0.0932E * 0.0984E * 00 & 0.9983E * \\ 0.0932E * 0.0984E * 00 & 0.9983E * \\ 0.093$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

Table VII. (cont)

-

38 37 36 35 10 LZ= Z= $120 \\ 119 \\ 118$

.

110098765432109876543210998765432	$\begin{array}{c} 0 & + 55549 \pm 01 & 0 & + 84495 \pm 01 \\ 0 & + 34158 \pm 01 & 0 & + 7475 \pm 01 \\ 0 & + 34158 \pm 01 & 0 & + 6974 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 6974 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 6974 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 715 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 715 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 1175 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 35975 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 35975 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 317725 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 317725 \pm 01 \\ 0 & + 016 \pm 01 & 0 & + 317725 \pm 01 \\ 0 & + 168 \pm 01 & 0 & + 35775 \pm 01 \\ 0 & + 168 \pm 01 & 0 & + 54455 \pm 01 \\ 0 & + 164 \pm 01 & 0 & + 103555 \pm 01 \\ 0 & + 164 \pm 01 & 0 & + 103555 \pm 01 \\ 0 & - 164 \pm 01 & 0 & + 103555 \pm 01 \\ 0 & - 164 \pm 01 & 0 & + 103555 \pm 01 \\ 0 & - 10555 \pm 01 & 0 & + 103555 \pm 01 \\ 0 & - 10555 \pm 01 & 0 & + 10355 \pm 01 \\ 0 & - 10555 \pm 01 & 0 & + 10355 \pm 01 \\ 0 & - 10555 \pm 01 & 0 & + 10355 \pm 01 \\ 0 & - 10055 \pm 01 & 0 & + 10055 \pm 01 \\ 0 & - 100005 \pm 01 & 0 & + 1000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 1000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 1000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 1000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 10000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 10000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 1000005 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 10000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 0000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 0000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 0000035 \pm 01 \\ 0 & - 000005 \pm 01 & 0 & + 0000035 \pm 01 \\ 0 & - 0000005 \pm 000000000000000000000000000$	0 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 -	184 184 <th>$\begin{array}{cccccccccccccccccccccccccccccccccccc$</th> <th>$\begin{array}{c} \bullet & \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet & \bullet & \bullet \\ \bullet & \bullet &$</th> <th>$\begin{array}{c} 0 & 1 & 0 & 5 & 2 \\ 0 & 1 & 0 & 5 & 4 \\ 0 & 1 & 0 & 3 & 4 \\ 0 & 1 & 0 & 3 & 4 \\ 0 & 1 & 0 & 3 & 2 \\ 0 & 1 & 0 & 3 & 2 \\ 0 & 1 & 0 & 5 & 2 \\ 0 & 1 & 0 & 5 & 2 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\$</th> <th>$\begin{array}{c} 0.1 & 0.1 & 0.1 & 0.1 \\ 0.1 & 0.0 & 0.1 & 0.1 \\ 0.1 & 0.1 & 0.0 & 0.1 \\ 0.1 & 0.1 & 0.1 & 0.1 \\ 0.1 & 0.1 & 0.1 & 0.1 \\$</th> <th>$\begin{array}{c} \dot{a} & \dot{a} & \dot{b} & \dot{a} & \dot{b} & \dot{a} & \dot{b} & \dot{a} & \dot{b} & \dot{a} \\ \dot{b} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} \\ \dot{c} & \dot$</th> <th></th>	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{c} \bullet & \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet & \bullet & \bullet \\ \bullet & \bullet &$	$\begin{array}{c} 0 & 1 & 0 & 5 & 2 \\ 0 & 1 & 0 & 5 & 4 \\ 0 & 1 & 0 & 3 & 4 \\ 0 & 1 & 0 & 3 & 4 \\ 0 & 1 & 0 & 3 & 2 \\ 0 & 1 & 0 & 3 & 2 \\ 0 & 1 & 0 & 5 & 2 \\ 0 & 1 & 0 & 5 & 2 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 5 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\$	$\begin{array}{c} 0.1 & 0.1 & 0.1 & 0.1 \\ 0.1 & 0.0 & 0.1 & 0.1 \\ 0.1 & 0.1 & 0.0 & 0.1 \\ 0.1 & 0.1 & 0.1 & 0.1 \\ 0.1 & 0.1 & 0.1 & 0.1 \\$	$ \begin{array}{c} \dot{a} & \dot{a} & \dot{b} & \dot{a} & \dot{b} & \dot{a} & \dot{b} & \dot{a} & \dot{b} & \dot{a} \\ \dot{b} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} & \dot{c} \\ \dot{c} & \dot{c} \\ \dot{c} & \dot$	
2109876543210987654321098765432109876543210987654321098765432222222	0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	U U	$\begin{array}{cccccccccccccccccccccccccccccccccccc$		$\begin{array}{c} 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0$	$\begin{array}{c} 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 &$	$\begin{array}{c} 0 & 1 & 0 & 0 & 0 & 0 \\$	$\begin{array}{c} 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 &$	

0.104705+01 0.10074E+01 0.10015E+01 0.10005E+01 0.10000E+01 0.1000 22 21 1 A 1 7 13 11 10 21 22 23 24 25 26 27 28 29 30 0.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000 LZ= Z= īŏз 99 9977999998876543210 78 71

Table VII. (cont)

++++ MACH

١

 $\begin{array}{c} L2=\\ Z=\\ C=0000000E+000.0000000E+000.00000E+000.00000E+000.00000E+000.00000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.000000E+000.00000E+000.00000E+000.000000E+000.00000E+000.000000E+000.000000E+000.00000E+000.00000E+000.00000E+000.00000E+000.00000E+000.00000E+000.000000E+000.000000E+000.000000E+000.000000E+000.0000E+000.0000E+000.0000E+000.0000E+000.0000E+000.00000E+000.00$

Har Putl. (Cont.) 109 108 107 106 105 105 105 103 0109987654321098765432109876543210987654321098765432109876543210987654321098765432109876543210987654 <u>,</u> -2 51 50 49 46 45 41098765

Table VII. (cont)

932109876593210987659321 	$\begin{array}{c} 0 &, 50 \leq 10 \leq 4 \leq 0 0 0 5 \leq 13 \leq 4 \leq -1 \leq 1 \\ 0 & \leq 0 \leq 10 \leq 0 \leq 1 \leq 0 0 2 \leq 6 \leq 7 \leq 7 \leq -7 \leq 1 \\ 0 & \leq 0 \leq 0 \leq 1 \leq -7 \leq 0 0 2 \leq 6 \leq 7 \leq 7 \leq -7 \leq 1 \\ 0 & \leq 0 \leq 0 \leq 1 \leq -7 \leq 0 0 0 1 \leq 2 \leq 7 \leq 7 \leq -7 \leq 1 \\ 0 & \leq 0 \leq 0 \leq 0 0 0 0 0 0 1 \leq 7 \leq$	$\begin{array}{c} * 1 \ F \ F \ O \ O \ C = C \ I \ O \ 1 \ O \ V \ 4 \ 4 \ C \ O \ C \ 1 \ O \ V \ 4 \ 4 \ C \ O \ C \ 1 \ O \ V \ 4 \ 4 \ C \ O \ C \ 1 \ O \ 1 \ O \ 2 \ C \ 4 \ 4 \ 4 \ 4 \ C \ O \ C \ 1 \ O \ 1 \ 0 \ 1 \ 7 \ 2 \ C \ 0 \ C \ 0 \ 1 \ O \ 3 \ 7 \ 2 \ C \ 0 \ C \ 0 \ 1 \ O \ 1 \ 0 \ 1 \ 7 \ 2 \ C \ 0 \ C \ 0 \ 1 \ 0 \ 1 \ 7 \ 2 \ C \ 0 \ 0 \ 1 \ 0 \ 1 \ 0 \ 1 \ 0 \ 1 \ 0 \ 1 \ 0 \ 1 \ 0 \ 1 \ 0 \ 0$	$\begin{array}{c} 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 \\ 1 & 1 &$	22556575124000 (22556575124000 (22556575124000 (22556575124000 (2255657124000 (225567124000 (225567124000 (225567124000 (225567124000 (225567124000 (225567124000 (225567124000 (225567124000 (225567124000 (22556712400 (22557712400 (2255771000 (22557712400 (2255771000 (2255771000 (22557710	$\begin{array}{c} 0.353265 + 0.00 \\ 0.353265 + 0.00 \\ 0.353265 + 0.00 \\ 0.35325 + 0.00 \\ 0.35335 + 0.00 \\ 0.35335 + 0.00 \\ 0.35355 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.355535 + 0.00 \\ 0.35555 + 0.00 \\ 0.35555 + 0.00 \\ 0.35555 + 0.00 \\ 0.35555 + 0.00 \\ 0.355555 + 0.00 \\ 0.355555 + 0.00 \\ 0.355555 + 0.00 \\ 0.3555555 + 0.00 \\ 0.3555555 + 0.00 \\ 0.3555555555555555555555555555555555555$	$\begin{array}{c} 4 3 4 10 t \\ 4 26 55 t \\ 4 26 55 t \\ 4 20 39 2 t \\ 4 20 39 2 t \\ 4 20 39 2 t \\ 4 20 39 t \\ 4 20 39 t \\ 4 20 5 t \\ 4 5 4 5 t \\ 5 $	$\begin{array}{c} 1 \ 4 \ 9 \ 1 \ 6 \ 1 \ 6 \ 1 \ 6 \ 1 \ 6 \ 1 \ 6 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 1 \ 6 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 6 \ 5 \ 5 \ 6 \ 6 \ 6 \ 5 \ 5 \ 6 \ $	+E-E+00 22E+000 22E+000 4+E+000 10EE+0000000000
LZ= Z= 120	11 12 1.000005+000.0000005+000. 0.537455+00 0.54141E+00 0	.030000CE+000.000000E+000 0.54238E+00 0.54270E+00	0.000000E+000.0	000000E+000 +54316E+00	0.54354E+00	.000000E+000	0.54502E+000.0000	10E+00 29E+00 89E+00
1987 1117 1117 1117 1117 1117 1117 1117	$\begin{array}{c} 0.52^{\circ}35^{\circ}.8^{\circ}35^{\circ}.8^{\circ}00 & 0.536955^{\circ}600 & 0.5363506^{\circ}000 & 0.5363766^{\circ}000 & 0.53513776^{\circ}000 & 0.55513776^{\circ}000 & 0.55513776^{\circ}0000 & 0.55513776^{\circ}0000 & 0.55513776^{\circ}000000000000000000000000000000000000$	$\begin{array}{c} 0.5 \\$	$\begin{array}{c} 0 & 55 \\ 0 & 5$	54025E+00 53961E+000 53961E+000 533762E+000 553792E+000 553548E+000 553548E+000 552544E+000 552044E+000 552044E+000 552044E+000 55158E+000 55158E+000 545204E+000 55158E+000 545204E+000 552544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E+000 55544E	$\begin{array}{c} 0 & 5 & 4 & 0 & 18 \\ \hline 0 & 5 & 39 & 35 \\ \hline 0 & 5 & 39 & 55 \\ \hline 0 & 5 & 39 & 55 \\ \hline 0 & 5 & 39 & 55 \\ \hline 0 & 5 & 37 & 57 \\ \hline 0 & 5 & 37 & 57 \\ \hline 0 & 5 & 57 & 57 $	$\begin{array}{c} 0.5 \\ 5 \\ 4 \\ 0.5 \\ 3 \\ 3 \\ 8 \\ 4 \\ 0.5 \\ 3 \\ 3 \\ 4 \\ 5 \\ 1 \\ 1 \\ 2 \\ 2 \\ 1 \\ 2 \\ 2 \\ 2 \\ 2 \\ 2$	$\begin{array}{c} 0, 5 \neq \mathbf{113E} + 00 & 0 = 54 \\ 0, 5 \neq \mathbf{003E} = 00 & 0 = 54 \\ 0, 5 \neq \mathbf{003E} = 00 & 0 = 54 \\ 0, 5377 + 00 & 0 = 537 \\ 0, 53534 + 124 & 00 & 0 = 537 \\ 0, 53534 + 124 & 00 & 0 = 537 \\ 0, 53534 + 124 & 00 & 0 = 537 \\ 0, 53534 + 124 & 00 & 0 = 537 \\ 0, 53534 + 124 & 00 & 0 = 537 \\ 0, 52564 + 124 & 00 & 0 = 537 \\ 0, 52564 + 124 & 00 & 0 & 531 \\ 0, 52564 + 124 & 00 & 0 & 531 \\ 0, 52564 + 124 & 00 & 0 & 0 & 514 \\ 0, 52564 + 124 & 00 & 0 & 0 & 514 \\ 0, 52564 + 124 & 00 & 0 & 0 & 0 & 14 \\ 0, 52564 + 124 & 00 & 0 & 0 & 0 & 0 & 0 \\ 0, 512794 + 00 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 512794 + 00 & 0 & 0 & 0 & 0 & 0 \\ 0, 512794 + 00 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 512794 + 00 & 0 & 0 & 0 & 0 & 0 \\ 0, 51274 + 00 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 51274 + 00 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 51274 + 00 & 0 & 0 & 0 & 0 & 0 \\ 0, 51274 + 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 51274 + 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 51275 + 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0, 51775 + 0 & 0 & 0 & 0 & 514 \\ 0, 0, 0, 0, 1 + 0 & 0 & 0 & 514 \\ 0, 0, 0, 0, 1 + 0 & 0 & 0 & 0 & 514 \\ 0, 0, 0, 0, 1 + 0 & 0 & 0 & 0 & 0 \\ 0, 0, 0, 0, 0, 0 & 0 & 0 \\ 0, 0, 0, 0, 0, 0 & 0 \\ 0, 0, 0, 0, 0, 0 & 0 & 0 \\ 0, 0, 0, 0, 0, 0 & 0 & 0 \\ 0, 0, 0, 0, 0, 0 & 0 & 0 \\ 0, 0, 0, 0, 0, 0 & 0 \\ 0, 0, 0, 0, 0 & 0 & $	061 ± 000 842 ± 0000 842 ± 00000 842 ± 0000

 Image: Provide State St LZ=

Table VII. (cont)

.

2=	C.000000E+000										
120 1119 1116 1117 1116 1117 1116 1117 1117	$\begin{array}{c} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 $	$\begin{array}{c} 0.54467E + 00\\ 0.54936E + 00\\ 0.54936E + 00\\ 0.54936E + 00\\ 0.54976E + 00\\ 0.554976E + 00\\ 0.554976E + 00\\ 0.554976E + 00\\ 0.551976E + 00\\ 0.55796E + 00\\ 0.55786E + 00\\ 0.55386E + 00\\ 0.55$	$\begin{array}{c} 0.5 & 46.94 E + 0.01\\ 0.5 & 47.52 E + 0.02\\ 0.5 & 47.52 E + 0.02\\ 0.5 & 47.52 E + 0.02\\ 0.5 & 49.52 E + 0.02\\ 0.5 & 41.52 E + 0.02\\ 0.5 & 51.26 E +$	$\begin{array}{c} \bullet & \bullet $	$\begin{array}{c} 0.54141E+00\\ 0.54144E+000\\ 0.54147E+000\\ 0.54147E+000\\ 0.54147E+000\\ 0.54147E+000\\ 0.54162E+000\\ 0.5412E+000\\ 0.5412E+000\\ 0.54512E+000\\ 0.54512E+000\\ 0.54512E+000\\ 0.54512E+000\\ 0.54512E+000\\ 0.54512E+000\\ 0.54512E+000\\ 0.552047E+000\\ 0.552047E+000\\ 0.552047E+000\\ 0.552512E+000\\ 0.55257E+000\\ 0.554065E+000\\ 0.554065E+000\\ 0.554104E+000\\ 0$	$ \begin{array}{c} 0 & 5 & 4 & 1 & 0 & 7 & 0 \\ 0 & 5 & 4 & 1 & 0 & 4 \\ 0 & 4 & 5 & 4 & 1 & 3 & 6 \\ 0 & 5 & 4 & 1 & 3 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 2 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 4 & 1 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 2 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 7 & 5 \\ 0 $	$\begin{array}{c} \bullet, $	$\begin{array}{c} 0 & 5 & 5 & 7 & 7 & 5 & 5 & 6 & 0 \\ 0 & 5 & 5 & 7 & 7 & 5 & 5 & 6 & 0 \\ 0 & 5 & 5 & 4 & 0 & 5 & 0 & 0 \\ 0 & 5 & 4 & 0 & 1 & 5 & 5 & 0 & 0 \\ 0 & 5 & 4 & 0 & 1 & 5 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 5 & 5 & 0 & 1 & 1 & 5 & 0 & 0 \\ 0 & 5 & 5 & 7 & 1 & 4 & 1 & 0 & 0 \\ 0 & 5 & 5 & 7 & 5 & 5 & 5 & 5 & 5 & 5 & 5$	$\begin{array}{c} 0.5316.00\\ 0.5316.471.00\\ 0.5316.471.00\\ 0.5316.471.00\\ 0.5316.471.00\\ 0.5316.471.00\\ 0.5317.651.00\\ 0.5317.651.00\\ 0.5317.651.00\\ 0.5317.651.00\\ 0.5317.00\\ 0.5307.00\\ 0$	$ \begin{array}{c} 0 & 5 + 73 3 1 = 0 \\ 0 & 5 + 73 3 1 = 0 \\ 0 & 5 + 73 3 1 = 0 \\ 0 & 5 + 73 3 1 = 0 \\ 0 & 5 + 73 3 1 = 0 \\ 0 & 5 + 71 0 1 = 0 \\ 0 & 5 + 71 0 1 = 0 \\ 0 & 5 + 71 0 1 = 0 \\ 0 & 5 + 71 0 1 = 0 \\ 0 & 5 + 71 0 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 70 1 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 3 0 1 = 0 \\ 0 & 5 + 50 1 0 \\ 0 & 0 & 5 + 5 1 0 \\ 0 & 0 & 5 + 5 1 0 \\ 0 & 0 & 5 + 5 1 0 \\ 0 & 0 & 5 + 5 1 0 \\ 0 & 0 & 0 & 5 + 5 1 0 \\ 0 & 0 & 0 & 0 & 1 1 5 7 1 = 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 &$	
66 65 64 63	$\begin{array}{c} 0 & .52 \\ .$	0+53759E+00 0+53660E+00 0+53521E+00	$\begin{array}{c} 0 & 5 & 4 & 112 & 65 & 4 & 100 \\ 0 & 5 & 5 & 5 & 98 & 126 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 4 & 00 \\ 0 & 5 & 5 & 70 & 52 & 52 & 00 \\ 0 & 5 & 5 & 51 & 52 & 52 & 00 \\ 0 & 5 & 51 & 51 & 52 & 52 & 00 \\ 0 & 5 & 51 & 51 & 52 & 52 & 00 \\ 0 & 5 & 51 & 51 & 52 & 52 & 00 \\ 0 & 5 & 51 & 51 & 52 & 52 & 00 \\ 0 & 5 & 51 & 51 & 52 & 52 & 00 \\ 0 & 51 & 51 & 51 & 52 & 52 & 00 \\ 0 & 51 & 51 & 51 & 52 & 52 & 00 \\ 0 & 51 & 51 & 51 & 51 & 52 & 52 \\ 0 & 51 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 \\ 0 & 51 & 51 & 51 & 51 \\ 0 & 51 &$	$\begin{array}{c} 0 & 5 < 0 \\ 0 & 5 < 1 \\ 0 & 5 < 1 \\ 1 \\ 0 & 5 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\$	0 541372 + 00 0 542392 + 00 0 542392 + 00 0 542392 + 00 0 543302 + 00 0 543302 + 00 0 543302 + 00 0 5443002 + 00 0 5541252 + 00 0 5541252 + 00 0 553772 + 00 0 553572 + 00 0 553772 + 00 0 5	$\begin{array}{c} 0 & 54 \\ 0 & 54 \\ 0 & 54 \\ 155 \\ 0 & 54 \\ 155 \\ 0 & 54 \\ 0 & 54 \\ 155 \\ 0 & 54 \\ 0 & 5$	$\begin{array}{c} 0 & 5 & 4 & 5 & 7 \\ 0 & 5 & 5 & 4 & 9 & 5 \\ 0 & 5 & 5 & 4 & 9 & 8 & 5 \\ 0 & 5 & 5 & 1 & 0 & 6 \\ 0 & 5 & 5 & 5 & 3 & 1 & 5 \\ 0 & 5 & 5 & 5 & 3 & 5 & 5 \\ 0 & 5 & 5 & 5 & 3 & 5 & 5 \\ 0 & 5 & 5 & 5 & 3 & 5 & 5 \\ 0 & 5 & 5 & 5 & 3 & 5 & 5 \\ 0 & 5 & 5 & 5 & 3 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 7 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 & 5 & 5 \\ 0 & 5 & 5 \\ 0 & 5 & 5 & 5 \\ 0 &$	$\begin{array}{c} 0 & 55 \\ 55 \\ 157 \\ 6 \\ 157 \\$	$\begin{array}{c} 0 & 5 \\$	$\begin{array}{c} 0.53382 + 0.0\\ 0.6507042 + 0.0\\ 0.6507042 + 0.0\\ 0.631742 + 0.0\\ 0.631742 + 0.0\\ 0.6317622 + 0.0\\ 0.631682 + 0.0\\ 0.631682 + 0.0\\ 0.650282 + 0.0\\ 0.650282 + 0.0\\ 0.559722 + 0.0\\ 0.559722 + 0.0\\ 0.559722 + 0.0\\ 0.559722 + 0.0\\ 0.559722 + 0.0\\ 0.541512 + 0.0\\ 0.541512 + 0.0\\ 0.540582 + 0.0\\ 0.540582 + 0.0\\ 0.540582 + 0.0\\ 0.5343502 + 0.0\\ 0.5343502 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.536732 + 0.0\\ 0.52912 + 0.0\\ 0.00 +$	

J TIME PLOTS 0++++ DIR1 PLOTS +++++ U..... DIR3 PLOTS

APPENDIX C LIST OF ACRONYMS, ABBREVIATIONS, AND SYMBOLS

Term	Definition
A ⁺	van Driest damping coefficient
ADI	alternating direction implicit
ADVR	axial velocity density ratio
b	total or effective viscosity
С _р	specific heat at constant pressure
D	damping parameter
d	distance to the nearest wall
d+	dimensionless distance to the nearest wall
D	deformation tensor
h	enthalpy
h/h _o	normalized heat transfer coefficient
h _l , h ₂ , h ₃	normal distance between loops
I	identity tensor
k	turbulence kinetic energy
κ _B	bulk viscosity coefficient
LBI	linearized block implicit
۶.	mixing length
٤ _∞	mixing length in the core flow region
Ma	Mach number
MINT code	multidimensional, implicit, nonlinear, time-dependent code
N-S	Navier-Stokes
Ρ	pressure
Pr	laminar Prandtl number
P(r,s)	position vector

Term	Definition
Prt	effective turbulent Prandtl number
Ps	static pressure
PS/PT	static pressure/total pressure
Pt	total pressure
↓	mean heat flux vector
q	magnitude of the velocity
Q T	turbulent heat flux vector
R	universal gas constant
r	radial parameter
Re	Reynolds number
R _τ	local ratio of turbulent to laminar viscosity
S	arc length parameter
SRA	Scientific Research Associates
Т	temperature
T t	temperature time
t	time
t T _o	time reference temperature
t T _o T _t	time reference temperature stagnation temperature
t T _o T _t T _w /Tg	time reference temperature stagnation temperature wall to gas temperature ratio
t T _o T _t T _w /T _g U	time reference temperature stagnation temperature wall to gas temperature ratio velocity
t T _o T _t T _w /T _g U Ū	time reference temperature stagnation temperature wall to gas temperature ratio velocity velocity vector
t T _o T _t T _w /T _g U Ū U Ū	time reference temperature stagnation temperature wall to gas temperature ratio velocity velocity vector velocity component in x-direction
t T ₀ T _t T _w /T _g U \overrightarrow{U} u \overrightarrow{u}	<pre>time reference temperature stagnation temperature wall to gas temperature ratio velocity velocity vector velocity component in x-direction fluctuation velocity vector</pre>
t T_0 T_t T_w/T_g U U U U U U U U	<pre>time reference temperature stagnation temperature wall to gas temperature ratio velocity velocity vector velocity component in x-direction fluctuation velocity vector edge velocity</pre>

,

Term	Definition
W	velocity component in z-direction
We	w at the edge of the boundary layer
x, x ₁	Cartesian coordinate in the transverse direction
x/cx	fraction of axial chord
×te	trailing edge location
y, ×2	Cartesian coordinate in the spanwise direction
y ¹ , y ² , y ³	computational coordinates
z, ×3	Cartesian coordinate in the streamwise direction
1-D	one-dimensional
2-D	two-dimensional
3-D	three-dimensional
Δx	grid spacing
δ	boundary layer thickness
۶pS	pressure surface trailing edge boundary layer thickness
٥٤٤	suction surface trailing edge boundary layer thickness
ε	turbulence energy dissipation rate
κ	von Karman constant
к	mean thermal conductivity
μ	dynamic viscosity
μ ^T	turbulent viscosity
vart	artificial dissipation
ξ, η, ζ	computational coordinates
Ξ	molecular stress tensor
π ^T	turbulent stress tensor
ρ	density

Term	<u>Definition</u>
σ	artificial dissipation parameter
τ	time
τջ	local shear stress
τ_{XX} , τ_{XY} , etc.	component of stress tensor
Φ	mean flow dissipation rate

REFERENCES

- R.A. Delaney, "Time Marching Analysis of Steady Transonic Flow in Turbomachinery Cascades Using the Hopscotch Method," ASME Journal of Engineering for Power, Vol 105, pp 272-279, 1983.
- 2. J.R. Caspar, D.E. Hobbs, and R.L. Davis, "Calculation of Two-Dimensional Cascade Flow Using Finite Area Methods," AIAA Journal, Vol 18, 1980.
- 3. H. McDonald, "Computation of Turbomachinery Boundary Layers, The Aerodynamics of Aircraft Gas Turbine Engines," AFAPL-TR-78-52, 1978.
- 4. E.C. Hansen, G.K. Serovy, and P.M. Sockol, "Axial Flow Compressor Turning Angle and Loss by Inviscid-Viscous Interaction Blade-to-Blade Computation," ASME Journal of Engineering for Power, Vol 102, 1980.
- T. Rehyner and I. Flugge-Lotz, "The Interaction of Shock Waves with a Laminar Boundary Layer," International Journal of Nonlinear Mechanics, Vol 3, 1968.
- L.S. Langston, M.L. Nice, and R.M. Hooper, "Three-Dimensional Flow within a Turbine Cascade Passage," ASME Journal of Engineering for Power, Vol 99, pp 21-28, 1977.
- S.J. Shamroth and H. McDonald, "An Assessment of an Ensemble-Averaged Navier-Stokes Calculation Procedure for Cascade Flow Fields," Scientific Research Associates Report R82-92001-F, 1982.
- S.J. Shamroth, H. McDonald, and W.R. Briley, "Prediction of Cascade Flow Fields Using the Averaged Navier-Stokes Equations," ASME Journal of Engineering for Gas Turbines and Power, Vol 106, 1984.
- S.J. Shamroth, R.J. Yang, and H. McDonald, "Further Development of a Transonic Cascade Analysis," Scientific Research Associates Report R83-9200015-F, 1983.

- S.J. Shamroth, H.J. Gibeling, and H. McDonald, "A Navier-Stokes Solution for Laminar and Turbulent Flow through a Cascade of Airfoils," AIAA Paper No. 89-1426, Scientific Research Associates Report R79-920004-F, 1980.
- 11. S.J. Shamroth, H. McDonald, and W.R. Briley, "A Navier-Stokes Solution for Transonic Flow through a Cascade," Scientific Research Associates Report R81-920007-F, 1982.
- 12. H. McDonald, S.J. Shamroth, and W.R. Briley, "Transonic Flows with Viscous Effects," <u>Transonic Shock and Multi-Dimensional Flows</u>: <u>Advances in</u> <u>Scientific Computing</u>, Academic Press, New York, 1982.
- 13. W.R. Briley and H. McDonald, "Solution of the Multi-Dimensional Compressible Navier-Stokes Equations by a Generalized Implicit Method," Journal of Computational Physics, Vol 24, 1977.
- 14. S.J. Shamroth and S.J. Gibeling, "Analysis of Turbulent Flow about an Isolated Airfoil Using a Time-Dependent Navier-Stokes Procedure," Paper presented at AGARD Specialists Meeting on Boundary Layer Effects on Unsteady Airloads, Aix-en-Provence, France, September 1980.
- 15. H.E. Stephens and D.E. Hobbs, "Design and Performance of Supercritical Airfoils for Axial Flow Compressors," Pratt and Whitney Aircraft Report FR11455, 1979.
- 16. D.E. Hobbs, J.H. Wagner, J.F. Dannenhoffer, and R.P. Dring, "Wake Experiment and Modeling for Fore and Aft-Loaded Compressor Cascade," Pratt and Whitney Aircraft Report FR13514, 1980.
- 17. J.F. Thompson, F.C. Thames, and C.W. Mastin, "Boundary Fitted Curvilinear Coordinate Systems for Solution of Partial Differential Equations on Fields Containing Any Number of Arbitrary Two-Dimensional Bodies," NASA CR-2729, July 1977.
- P.R. Eiseman, "A Coordinate System for a Viscous Transonic Cascade Analysis," Journal of Computational Physics, Vol 26, pp 307-338, March 1978.

- 19. Y.H. Oh, "An Analytical Transformation Technique for Generating Uniformly Spaced Computational Mesh in Numerical Grid Generation Techniques," NASA CP-2166, 1980.
- 20. P.R. Eiseman, "Coordinate Generation with Precise Controls over Mesh Properties," Journal of Computational Physics, Vol 47, 1982.
- 21. A.B. Turner, "Local Heat Transfer Measurements on a Gas Turbine Blade," Journal of Mechanical Engineering Sciences, Vol 13, 1971.
- 22. L.D. Hylton, M.S. Mihelc, E.R. Turner, D.A. Nealy, and R.E. York, "Analytical and Experimental Evaluation of the Heat Transfer Distribution over the Surface of Turbine Vanes," NASA CR-168015, May 1983.
- 23. P.D. Thomas and C.K. Lombard, "Geometric Conservation Law and Its Application to Flow Computation on Moving Grids," AIAA Journal, Vol 17, No. 10, 1979.
- 24. R.G. Hindman, "Generalized Coordinate Forms of Governing Fluid Equation and Associated Geometrically Induced Errors," AIAA Journal, Vol 20, 1982.
- 25. H. Schlichting, Boundary Layer Theory, McGraw-Hill, New York, 1960.
- 26. H. McDonald and R.W. Fish, "Practical Calculation of Transitional Boundary Layers," International Journal of Heat and Mass Transfer, Vol 16, No. 9, 1973.
- 27. W.P. Jones and B.E. Launder, "The Prediction of Laminarization with a Two-Equation Model of Turbulence," International Journal of Heat and Mass Transfer, Vol 15, 1972.
- 28. S.J. Shamroth and H.J. Gibeling, "A Compressible Solution of the Navier-Stokes Equations for Turbulent Flow about an Airfoil," NASA CR-3183, 1979.
- 29. B.E. Launder and D.B. Spalding, "The Numerical Computation of Turbulent Flows," Computer Methods in Applied Mechanics and Engineering, Vol 3, pp 269-287, 1974.

- 30. V.C. Patel, W. Rodi, and G. Scheurer, "Evaluation of Turbulence Models for Near Wall and Low Reynolds Number Flow," Third Symposium on Turbulent Shear Flow, University of California, Davis, 1981.
- 31. W.R. Briley and H. McDonald, "Computation of Three-Dimensional Horseshoe Vortex Flow Using the Navier-Stokes Equations," Seventh International Conference on Numerical Methods in Fluid Dynamics, 1980.
- 32. C.W. Mastin, "Error Induced by Coordinate Systems," <u>Numerical Grid Genera-</u> <u>tion</u>, J.F. Thompson, ed., Elsevier Publishing, New York, 1982.
- 33. I. Lindemuth and J. Killeen, "Alternating Direction Implicit Techniques for Two-Dimensional Magnetohydrodynamic Calculations," Journal of Computational Physics, Vol 13, 1973.
- 34. W.R. Briley and H. McDonald, "On the Structure and Use of Linearized Block Implicit Schemes," Journal of Computational Physics, Vol 34, 1980.
- 35. J. Douglas and J.E. Gunn, "A General Formulation of Alternating Direction Methods," Numerische Mathematik, Vol 6, pp 428-453, 1964.
- 36. W.R. Briley, R.C. Buggeln, and H. McDonald, "Computation of Laminar and Turbulent Flow in 90 Degree Square Duct and Pipe Bends Using the Navier-Stokes Equation, Scientific Research Associates Report R82-920009-F, 1982.
- 37. N.S. Liu, S.J. Shamroth, and H. McDonald, "Numerical Solution of the Navier-Stokes Equations for Compressible Turbulent Two/Three-Dimensional Flows in the Terminal Shock Region of an Inlet/Diffuser," AIAA Paper 83-1892, 1983.
- 38. D.V. Roscoe, S.J. Shamroth, H.J. Gibeling, and H. McDonald, "Investigation of the Mechanism of Transonic Shock Wave/Boundary Layer Interactions Using a Navier-Stokes Analysis," U.S. Army Research Office Contract DAAG29-80-C-0082, Scientific Research Associates Report R84-930006-F, 1984.

- 39. S. Dhawan and R. Narasimha, "Some Properties of Boundary Layer Flow During Transition from Laminar to Turbulent Motion," Journal of Fluid Mechanics, Vol 3, pp 418-436, 1958.
- 40. T.J. Barber and L.S. Langston, "Three-Dimensional Modeling of Cascade Flows," AIAA Paper 79-0047, 17th Aerospace Science Meeting, 1979.
- 41. L.S. Langston, "Cross Flows in a Turbine Cascade Passage," ASME Journal of Engineering for Power, Vol 102, pp 866-874, 1980.
- 42. R.A. Graziani, M.F. Blair, J.R. Taylor, and R.E. Mayle, "An Experimental Study of Endwall and Airfoil Surface Heat Transfer in a Large Scale Turbine Blade Cascade," ASME Journal of Engineering for Power, Vol 102, pp 257-267, 1980.
- 43. C.H. Sieverding and P. Van den Bosche, "The Use of Colored Smoke to Visualize Secondary Flows in a Turbine-Blade Cascade," Journal of Fluid Mechanics, Vol 134, pp 85-89, 1983.
- 44. S.J. Shamroth and H. McDonald, "Development of a Design-Oriented Navier-Stokes Cascade Analysis," Scientific Research Associates Report R84-910006-F, March 1984.
- 45. R.M. Beam and R.F. Warming, "An Implicit Factored Scheme for Compressible Navier-Stokes Equations," AIAA Journal, Vol 16, 1978.
- 46. R.M. Beam and R.F. Warming, "An Implicit Finite Difference Algorithm for Hyperbolic Systems in Conservation Law Form," Journal of Computational Physics, Vol 22, 1976.
- 47. R.M. Beam and R.F. Warming, "Alternating Direction Implicit Methods for Parabolic Equations with a Mixed Derivative," SIAM Journal on Scientific and Statistical Computing, Vol 1, 1980.

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

gathering and maintaining the data needed, and co collection of information, including suggestions for Davis Highway, Suite 1204, Arlington, VA 22202-	ompleting and reviewing the collection of in reducing this burden, to Washington Head	formation. Send comments regar quarters Services, Directorate for d Budget, Paperwork Reduction P				
1. AGENCY USE ONLY (Leave blank)						
4. TITLE AND SUBTITLE Turbine Vane External Heat Th Volume II. Numerical Solution	inal Contractor Report 5. FUNDING NUMBERS					
Three-Dimensional Turbine C 6. AUTHOR(S) R.J. Yang, B.C. Weinberg, S.J.	WU–None NAS3–23695					
7. PERFORMING ORGANIZATION NAM Performed by Scientific Resea Glastonbury, Connecticut 060 Under subcontract from Allisc Motors Corporation, P.O. Box	8. PERFORMING ORGANIZATION REPORT NUMBER E-None					
9. SPONSORING/MONITORING AGENC National Aeronautics and Spac Washington, DC 20546–000	10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-174828 EDR 11984, Volume II					
11. SUPPLEMENTARY NOTES Prepared in cooperation with NASA Project Manager H.J. Gladden, NASA Lewis Research Center, Cleveland, Ohio.						
12a. DISTRIBUTION/AVAILABILITY STA Unclassified - Unlimited Subject Category: 00 Available electronically at http://glt This publication is available from t	12b. DISTRIBUTION CODE					
13. ABSTRACT (Maximum 200 words) This two-volume report addresses the progress of contract NAS3–23695 to improve the predictive design capabilities for external heat transfer to turbine vanes. Volume II describes work performed under subcontract by Scientific Research Associates. This analytical effort examined the application of the time-dependent ensemble-averaged Navier-Stokes equations to transonic turbine cascade flow fields. In particular, efforts focused on an assessment of the procedure in conjunction with a suitable turbulence model to calculate steady turbine flow fields using an 0-type coordinate system. Three cascade configurations were considered. Comparisons were made between the predicted and measured surface pressures and heat transfer distributions wherever available. In general, the pressure predictions were in good agreement with the data. Heat transfer calculations also showed good agreement when an empirical transition model was used. However, further work in the development of laminar-turbulent transitional models is indicated. The calculations showed most of the known features associated with turbine cascade flow fields. These results indicate the ability of the Navier-Stokes analysis to predict, in reasonable amounts of computation time, the surface pressure distribution, heat transfer rates, and viscous flow development for turbine cascades operating at realistic flow conditions.						
 SUBJECT TERMS Turbine aerodynamics; Turbin Navier-Stokes; Turbine cascad 	15. NUMBER OF PAGES 159 16. PRICE CODE					
17. SECURITY CLASSIFICATION 18. OF REPORT	. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICA OF ABSTRACT	ATION 20. LIMITATION OF ABSTRACT			
Unclassified NSN 7540-01-280-5500	Unclassified	Unclassified	Standard Form 298 (Rev. 2-89)			