

11 127  
NASA CASE NO. LAR 14682-1

PRINT FIG. 1 \_\_\_\_\_

P- 11

**NOTICE**

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is, therefore, available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulations 1245.2).

To encourage commercial utilization of NASA-owned inventions, it is NASA policy to grant licenses to commercial concerns. Although NASA encourages nonexclusive licensing to promote competition and achieve the widest possible utilization, NASA will provide the necessary incentive to the licensee to achieve early practical application of the invention. Address inquiries and all applications for license for this invention to **NASA Patent Counsel, Langley Research Center, Code 143, Hampton, Virginia 23665-5225.**

Serial No.: 07/887,002  
Filed: 05-22-92

LaRC

(NASA-Case-LAR-14682-1) CONTROL  
AND AUGMENTATION OF PASSIVE  
PROXIMITY THROUGH TRANSPIRATION  
CONTROL Patent Application (NASA)  
11 0

N92-30387

Unclass

G3/34 0111101

AWARDS ABSTRACT

CONTROL AND AUGMENTATION OF PASSIVE POROSITY  
THROUGH TRANSPIRATION CONTROL

Pressure loading of a member is caused by movement of a fluid and/or the member relative to one another. Mechanical devices such as strakes and flaps are often used on vehicles to effectively alter the exterior surface of the vehicular member to achieve a desired reaction to loading. Also various air loading displacement systems are used which suck air from a high pressure area and/or forcibly exit air at a low pressure area to compensate for load induced pressure gradients. These mechanical devices and displacement systems are relatively complicated, have significant energy requirements, add weight to the vehicle, consume often critical space, and are often ineffective over a wide range of angles of attack and lift conditions.

A device for controlling pressure loading of a member is provided which consists of a porous skin mounted over the solid surface of the member and separated from the solid surface by a plenum. Fluid from an area exerting high pressure on the member may enter the plenum through the porous surface and exit into an area exerting a lower pressure on the member, thus controlling pressure loading of the member. A transpirational control device is provided which adds or subtracts pressure or mass to the plenum which causes the pressure loading on the forebody to increase or decrease on the desired side providing increased control of the forebody.

INVENTORS:	Daniel W. Banks	Richard M. Wood
Address:	211 Collins Drive	700 Berkley Court
	Newport News, VA 23601	Virginia Beach, VA 23542
	ss: [REDACTED]	ss: [REDACTED]

Steven X.S. Bauer  
211 Collins Drive  
Newport News, VA 23601  
ss: [REDACTED]

Employer: NASA LaRC  
Evaluator: Edgar G. Waggoner

Serial No.: 07/887,002  
Filed: May 22, 1992

CONTROL AND AUGMENTATION OF PASSIVE POROSITY  
THROUGH TRANSPIRATION CONTROL

Origin of the Invention

5

The invention described herein was made by employees of the United States Government and may be used by and for the Government for governmental purposes without the payment of any royalties thereon or therefor.

10

Background of the Invention

1. Technical Field of the Invention

15

The present invention relates generally to controlling the pressure load on various members, and more particularly to the active control of pressure loads using porosity.

2. Discussion of the Related Art

20

Pressure loading of a member can be caused by movement of the fluid and/or the member relative to one another. For example, many portions of an aircraft such as its forebody, canopy, fuselage, wings and tails are subjected to high air loads during flight. These air loads can vary significantly with model attitude and forward flight speed. Of particular concern for high performance military aircraft is that, depending on the geometry of the aircraft and its angle of attack, it may experience a large side force which results in a yawing moment which may be difficult to control. At low angles of attack the flow field is usually symmetric. As the angle of attack increases, two counterrotating, stationary vortices form on the leeward side of the forebody of the aircraft. At

30

higher angles of attack, the vortices become asymmetric creating greater pressure on one side of the aircraft forebody than the other thus resulting in a net side force and yawing moment. If not controlled, the resultant force and moment on the vehicle can be extreme and create an unsafe condition or  
5 significantly reduce the flight envelope of the aircraft.

Likewise, many helicopter components such as the tailboom, helicopter body, rotor hub and the rotor itself bear high loads. Land based vehicles such as cars, trucks, vans and especially tractor trailers often encounter huge loads due to inadequate front, top and rear designs. Also buildings, in particular  
10 roofs, are exposed to loads from wind conditions which can cause undue strain and even catastrophic failure.

Numerous solutions have been proposed for controlling pressure load which are usually member specific. Initial design of the exterior of the member is an important consideration but is unable to adapt to changing loading  
15 conditions. Mechanical devices such as strakes and flaps are often used on vehicles to effectively alter the exterior surface of the vehicular member to achieve a desired reaction to loading. Also various air loading displacement systems are used which suck air from a high pressure area and/or forcibly exit air at a low pressure area to compensate for load induced pressure gradients.  
20 These mechanical devices and displacement systems are relatively complicated, have significant energy requirements, add weight to the vehicle, consume often critical space, and are often ineffective over a wide range of angles of attack and lift conditions. Most attempts to reduce air loading on buildings involve initial exterior design as well as flexible internal structure which  
25 yields slightly to wind loads.

It is accordingly an object of the present invention to control pressure loading on members.

It is another object of the present invention to control pressure loading over a wide range of member attitude and free stream flow conditions.

It is another object of the present invention to achieve the foregoing objects with a simple control device using minimal energy.

It is a further object of the present invention to achieve the foregoing objects with minimal spatial and mass requirements.

5 It is yet another object of the present invention to accomplish the foregoing objects in a simple manner.

Additional objects and advantages of the present invention are apparent from the drawings and specification which follow.

## 10 Summary of the Invention

According to the present invention, the foregoing and additional objects are obtained by providing a pressure equalization device for use on a member exposed to a fluid load. This device consists of a porous outer skin, a solid  
15 inner surface and a transpirational control device. The porous outer skin is mounted over the solid inner surface with a plenum created between the two such that the fluid may pass through the porous material into the plenum and back through the porous material to equalize the external pressures on the member. The transpirational control device controls the flow through the  
20 porous outer skin by regulating the conditions in the cavity beneath this outer skin. Ideally the porous outer skin has a surface porosity of about 10 to 20% and can be made from a porous material or from a solid material which has been perforated. If the latter method is used, the perforations should be no more than about one boundary layer thickness in diameter. The thickness of  
25 the porous outer skin should be no less than the diameter of the perforations. The plenum may be divided into smaller, separately controlled plenums, which may be interconnected. The transpirational control device may be a vacuum pump, stored pressure, stored vacuum, or engine bleed air.

Brief Description of the Drawings

Fig. 1 is a perspective view showing a porous skin mounted outside of a solid surface;

5 Fig. 2 is a cross sectional view taken along line II-II;

Fig. 3a is a side view of a forebody, fig. 3b is a cross-sectional view taken along III-III showing the vortices formed on the forebody without a porous skin; and

10 Fig. 4a is a side view of a forebody, fig. 4b is a cross-sectional view taken along IV-IV showing the vortices formed on the forebody with a porous skin.

Detailed Description of the Invention

15 Figure 1 shows a forebody 12 of an aircraft. A portion of the forebody 12 is covered with a porous skin 14. The required thickness of the porous skin 14 is a function of the pressure load and the required response time for pressure equalization, about one boundary layer thickness. The porosity of the porous skin 14 is optimally between 10 and 20%. The porous skin 14 may be  
20 made from a porous material, such as sintered metal, or from a solid material, such as steel or fiberglass, which has been perforated, however these perforations should be no more than about one boundary layer thickness in diameter in order to minimize the disturbance of the external flow field.

Figure 2 shows the porous skin 14 mounted outside of the solid surface  
25 16 of the aircraft, forming a plenum 18 between the porous skin 14 and the solid surface 16. The porous skin 14 must be mounted over the plenum 18 such that there is minimal blockage in both the longitudinal and circumferential directions. Plenum 18 may be divided into subplenums 28 to allow for control of smaller areas. These subplenums 28 may be interconnected to other

subplenums or may be closed off from the other subplenums by engaging door 20 as needed, see figure 2.

At flight conditions where the fluid flow 30 about a forebody becomes asymmetric (e.g. at high angles of attack) as indicated in figure 3 by the asymmetric vortex formation 32 and 34, the pressure field acting on the forebody can become distinctly different from one side to the other. This causes a net side force to act on the forebody and a resultant yawing moment on the vehicle. When the solid surface 16 is covered with a porous skin 14, as described above, air from the lower suction side 38 (highest relative pressure) passes through the porous skin 14 into the plenum 18, flows through the plenum 18, to the higher suction side 40 (lowest relative pressure) thus equalizing the pressure differential and alleviating the side force and yawing moment as shown in figure 4. The vortices 36 are symmetric so the pressure fields acting on either side are equal and the net pressure load is zero. The flowfield becomes the same as that around a forebody at low angles of attack.

This invention may also be used to cause unequal pressure fields to improve control of the forebody. Pressure or mass is added or subtracted, as shown by arrows 22 and 24 in figure 1, to modify the cavity condition beneath the porous surface 14, thus augmenting or inhibiting the effect of the porous surface 14. The transpirational control device 26 regulates the pressure (and/or mass) inside of the plenum, creating a high or low pressure condition depending on whether a yaw moment to the left or right is required.

This invention may be used to control pressures on any object in a fluid flow including but not limited to aircraft, rotorcraft, cars, trucks, ships, submarines, buildings, pipes and ducts.

What is claimed is:

CONTROL AND AUGMENTATION OF PASSIVE POROSITY  
THROUGH TRANSPIRATION CONTROL

Abstract of the Disclosure

5

10 A device for controlling pressure loading of a member caused by a fluid moving past the member or the member moving through a fluid. The device consists of a porous skin mounted over the solid surface of the member and separated from the solid surface by a plenum. Fluid from an area exerting high pressure on the member may enter the plenum through the porous surface and exit into an area exerting a lower pressure on the member, thus controlling pressure loading of the member. A transpirational control device controls the conditions within the plenum thus controlling the side force and yaw moment on the forebody.



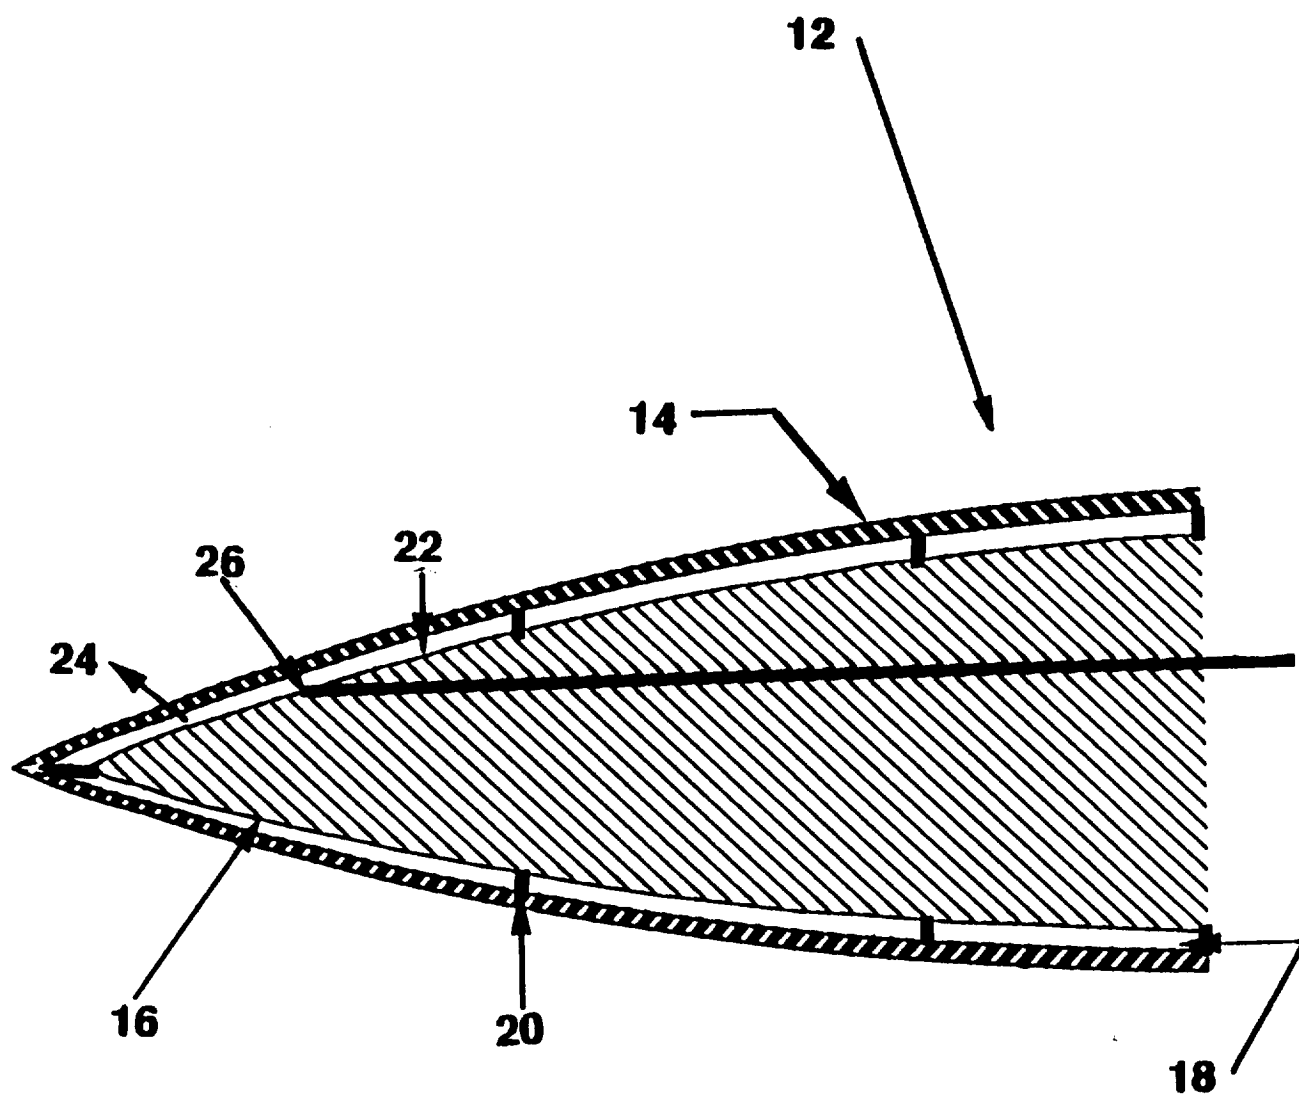


FIGURE 1.

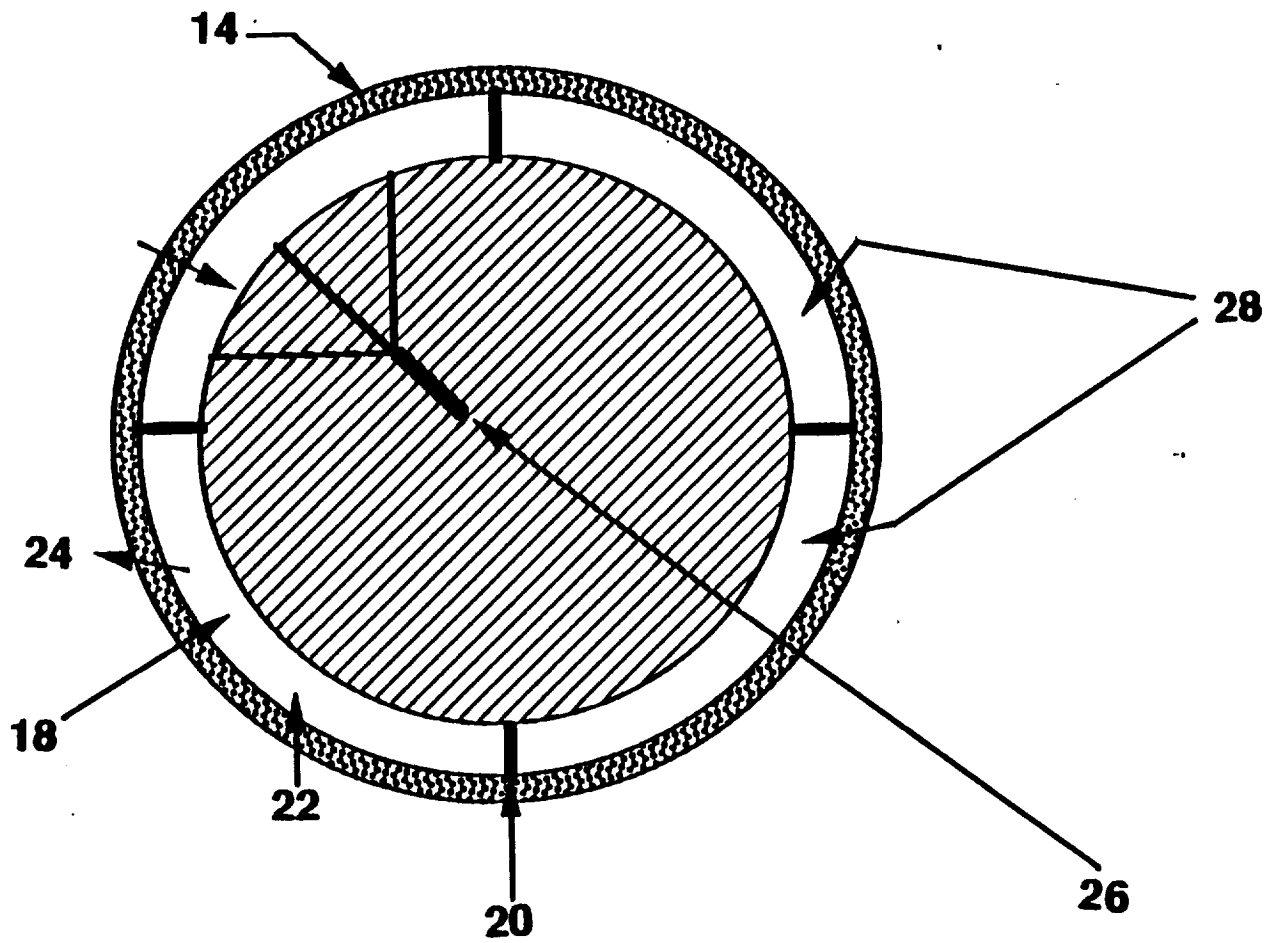


FIGURE 2.

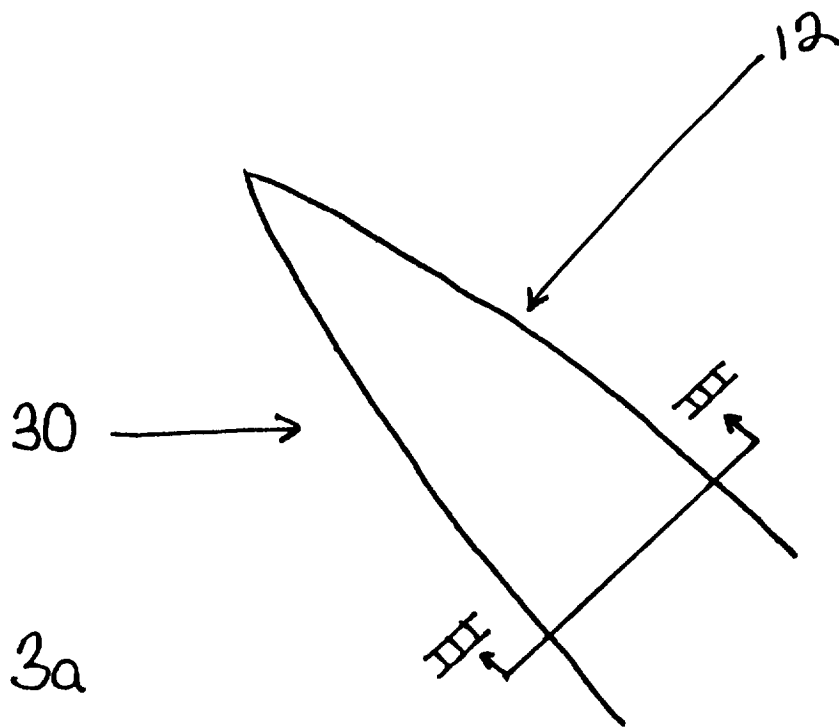


Figure 3a

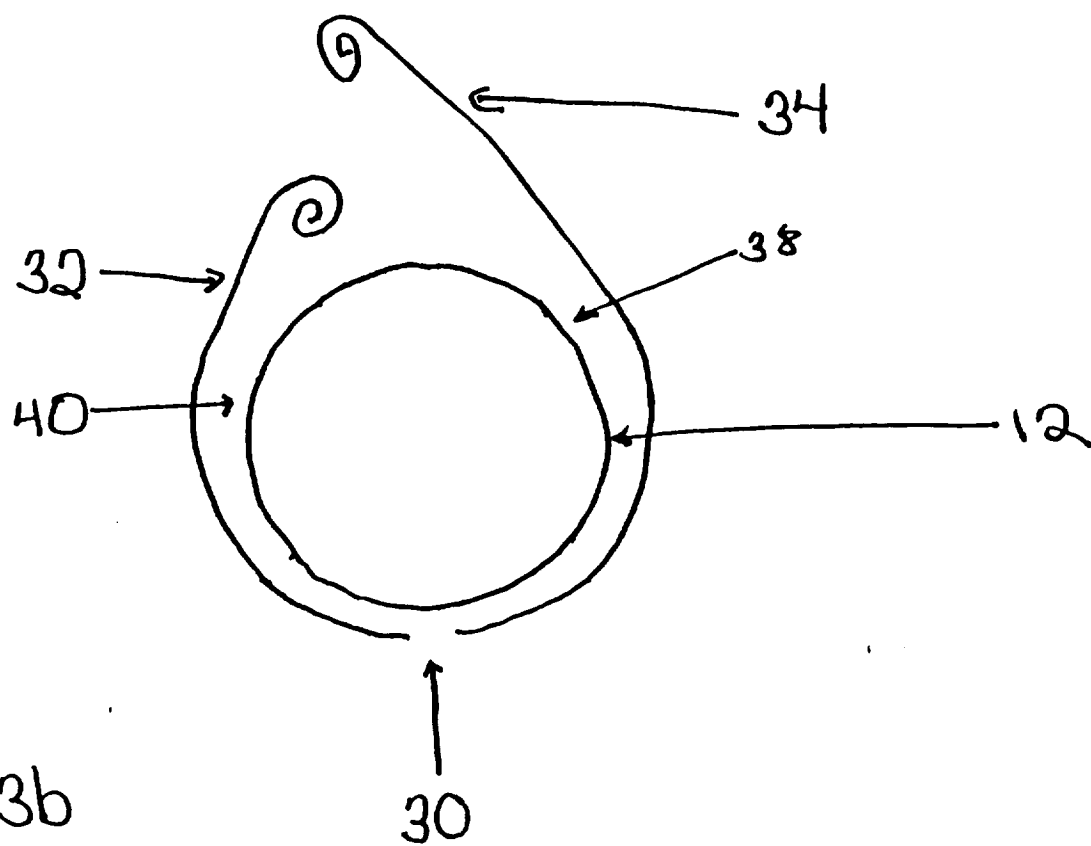


Figure 3b

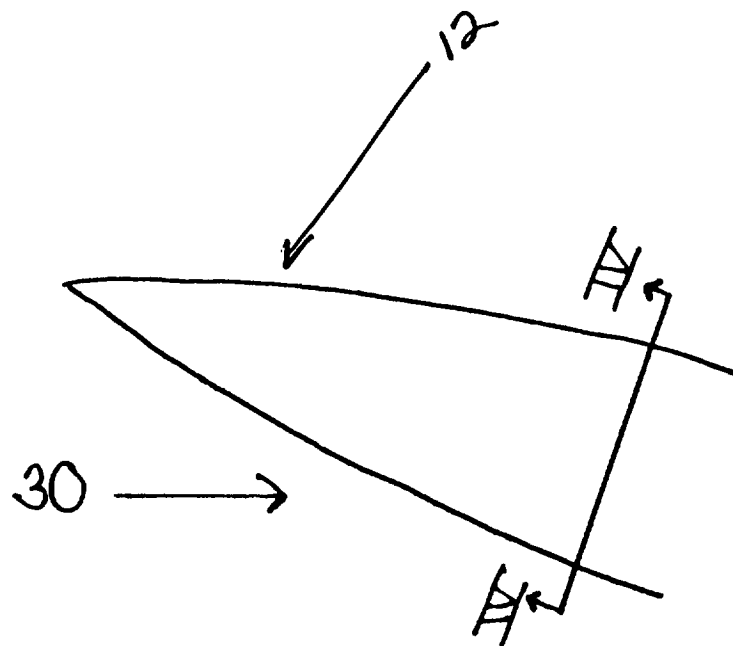


Figure 4a

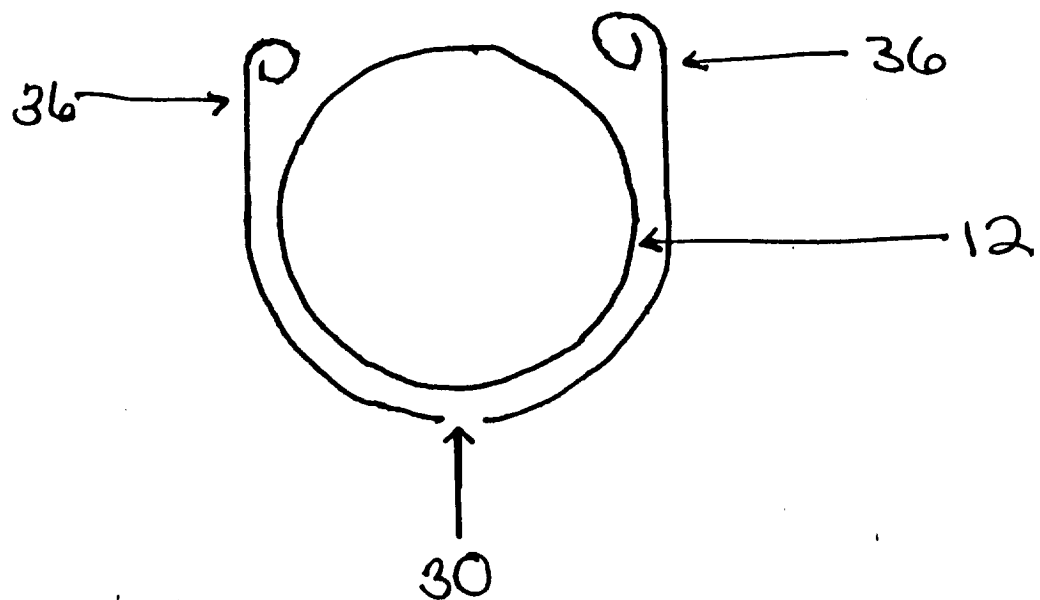


Figure 4b